



LED PRO

LED INGROUND LUMINAIRE

PRODUCT INFORMATION

- Illus LED recessed inground lights are flush-mounted fixtures designed for installation in the ground, driveways, or walls, providing a clean, modern, and discreet way to illuminate outdoor areas.
- These lights are widely used in landscaping to accentuate pathways, trees, building facades, and architectural elements.
- The LED recessed inground light is available in 3 model options, offering lumen outputs ranging from 285lm to 1150lm.

BENEFITS

- Offers a clean, modern, unobtrusive look that blends into landscapes for path guidance and architectural accents.
- Uses significantly less power than traditional lighting, reducing electricity costs.
- Offers a long lifespan, minimizing the need for frequent replacements.
- Illuminates dark corners, paths, and driveways to enhance safety and deter intruders.
- Suitable for a wide range of applications, including gardens, pathways, building facades, and pool areas.
- Free from hazardous materials, unlike some older lighting options.

FEATURES

- High CRI ≥ 85 .
- IK Rating IK08.
- Energy Saving.
- Non-Dimmable.
- Surge Protection 1kV.
- Efficacy up to 38lm/W.
- Long Lifespan 50000H.
- Input Voltage AC220-240V.



**BEYOND LIGHT..
TO THE LAST DETAILS!**

AREAS OF APPLICATION



Hospitality



Shopping Center



Commercial



Educational Center





TECHNICAL OPERATING & ELECTRICAL DATA

Body Color	Grey + Black
Body Material	Aluminum
CCT	3000K
CRI	≥85
Beam Angle	15°
Voltage and Frequency	AC220-240V, 50/60Hz
Ambient Temperature	45°C
IP Rating	IP67
IK Rating	IK08
IEC Classification	Class I
Dimming	Non-Dimmable
Surge Protection	4kV
Lifespan	50,000H
Switching Cycle	100,000x on/off
Warranty Period	60 Months



SPECIFICATIONS

Code No.	Model No.	Power	Lumen	Efficacy	D.F	P.F	Current	Cutting Size
LI615853	ILS7.5RMOIGL10	7.5W	285lm	38lm/W	0.93	0.82	39mA	D90mm
LI615854	ILS18RMOIGL10	18W	650lm	36.11lm/W	0.89	0.82	97mA	D130mm
LI615855	ILS30RMOIGL10	30W	1150lm	38.33lm/W	0.95	0.92	140mA	D170mm



I DIMENSIONS

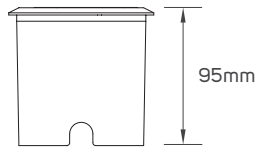

LI615853

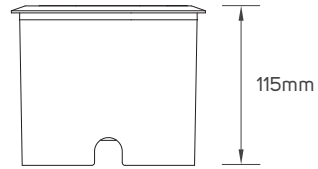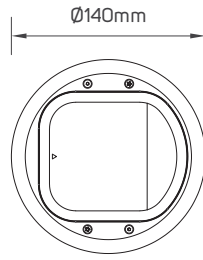

LI615854

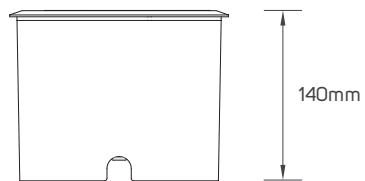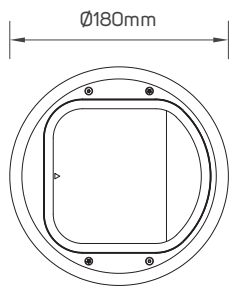

LI615855

APPLICATION PICTURE



LED INGROUND LUMINAIRE

**BEYOND LIGHT..
TO THE LAST DETAILS!**



build-station



lighting stores



illus lighting

C/ Cuenca, 87, Alaquas 46970, (Valencia) Spain, Ph. 34 961 623 958

www.illusillumination.com

illus illumination reserve the right to make dimensional, design and technical alternations without prior notice. illus illumination endeavor to ensure that any advice, recommendation or information it provides in product literature is accurate and correct. However due to the fact that illus do not have direct control on where and how the products are installed, illus illumination cannot accept any liability either direct or indirect arising from the use of illus products whether or not in accordance with any advice, specification, recommendation or information provided by illus illumination or its distributors.