

Create Welcoming Environment

LED AR111 LAMP SERIES

| PRODUCT INFORMATION

- LED AR111 creates a brilliant visual effect.
- Colors stay vibrant and natural enhancing the appeal of everything on display.
- ILLUS LED AR111 lamp gives the customer the flexibility to choose between 8CCT Based on their specific need with lumen package from 520 lm to 740 lm.

BENEFITS

- High intensity of beam for accent lighting with strong lumen maintenance.
- More vivid, vibrant colors over time for merchandise display with no harmful UV.
- Innovative design with hassle free retrofit solution.

FEATURES

- High CRI>95.
- Efficacy up to 57 lm/w.
- Long life span 25,000 hrs.
- Operating voltage 220 240 V.
- Dimmable.



AREAS OF APPLICATION







Hospitality

Public indoor

Shopping Center







Commercial V

Workplace Educational center




TECHNICAL OPERATING & ELECTRICAL DATA


Input Voltage & Frequency	AC220-240V, 50/60Hz
Beam Angle	30°
Rated CRI	95
Life Span	25,000h
Ingress Protection Rating	IP20
Dimming	Dimmable
Ambient Temperature	-20°~+40° C
Switching Cycle ON/OFF	100.000

SPECIFICATIONS

Code No.	Model No.	Power	CCT	Lumen	Efficicacy	Dimensions
612451	ILS520AR111L927WW01	10W	2700K	520lm	52lm/w	Ø111x75.5mm
612452	ILS540AR111L930WW01	10W	3000K	540lm	54lm/w	Ø111x75.5mm
612453	ILS560AR111L940NW01	10W	4000K	560lm	56lm/w	Ø111x75.5mm
612454	ILS570AR111L950DL01	10W	5000K	570lm	57lm/w	Ø111x75.5mm
612455	ILS700AR111L927WW01	14W	2700K	700lm	50lm/w	Ø111x75.5mm
612456	ILS710AR111L930WW01	14W	3000K	710lm	50lm/w	Ø111x75.5mm
612457	ILS730AR111L940NW01	14W	4000K	730lm	52lm/w	Ø111x75.5mm
612458	ILS740AR111L950DL01	14W	5000K	740lm	52lm/w	Ø111x75.5mm



PHOTOMETRIC DATA

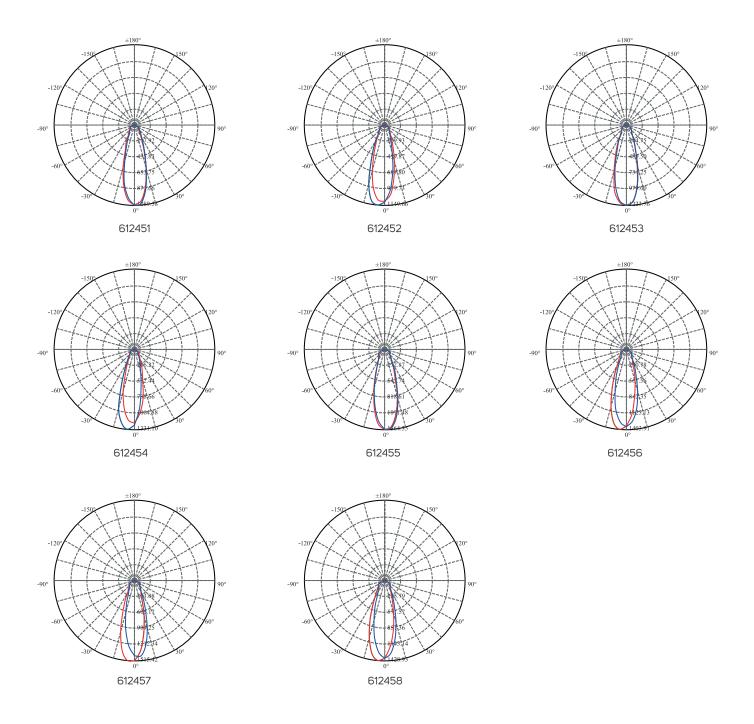

APPLICATION IMAGE



LED AR111 LAMP SERIES BEYOND LIGHT..
TO THE LAST DETAILS!

