



Make your boundaries **Stand Out**

# LED SURFACE-MOUNTED LUMINAIRE WALL

## PRODUCT INFORMATION

- Surface mounted, exterior- rated and compact sized architectural LED edge lighting luminaire that is designed for façade and outdoor decorative lighting applications.
- Ideal for edges lighting on windows and doors inner frames, building façades, landmarks and monuments.
- ILLUS LED SURFACE MOUNTED Luminaire (WALL) gives the customer the flexibility to choose between 7 CCT based on their specific need.

## BENEFITS

- Unique optical distribution to highlight the inner frame or outer edges of windows, balconies or doors.
- Compact size.
- Light weight.

## FEATURES

- High CRI>80.
- Operating voltage 220 – 240 V.
- Non – dimmable.

## AREAS OF APPLICATION



Industrial



Garden



Commercial

## TECHNICAL OPERATING & ELECTRICAL DATA

Input Voltage & Frequency	AC220-240V, 50/60Hz
Rated CRI	60~150
Color Temperature	3000K
Life Span	30,000hrs
Ingress Protection Rating	IP54, IP65
Dimming	Non-Dimmable


## SPECIFICATIONS

Code No.	Model No.	Power	Body Color	Body Material
541115	ILS4.5WLWW02	4.5	Dark Gray	Aluminum
541133	ILS3.5SMOWLF01	3.5	Dark Gray	Aluminum
541134	ILS07SMOWLF01	6	Dark Gray	Aluminum
541151	ILS13SMOWLF01	13	Dark Gray	Aluminum
541152	ILS13SMOWLF02	13.5	Dark Gray	Aluminum
541155	ILS13SMOWLF03	13	Dark Gray	Aluminum
541156	ILS13SMOWLF04	13.5	Dark Gray	Aluminum


## DIMENSIONS

Code No.	Model No.	Width	Length	Height
541115	ILS4.5WLWW02	161	211	59
541133	ILS3.5SMOWLF01	57	75	171
541134	ILS07SMOWLF01	57	75	240
541151	ILS13SMOWLF01	406	175	209
541152	ILS13SMOWLF02	406	175	209
541155	ILS13SMOWLF03	239	175	301
541156	ILS13SMOWLF04	175	239	301


## **| DIMENSIONS**

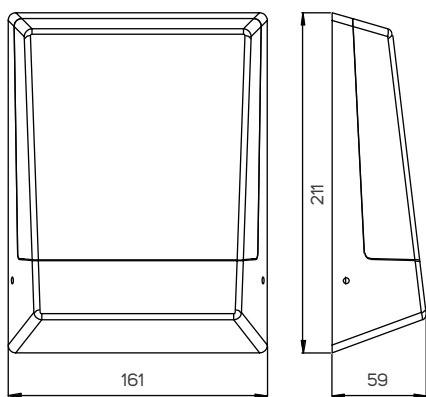


541115

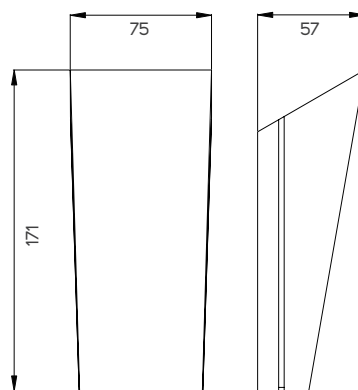


541133

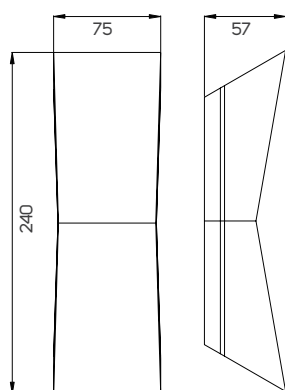

541134

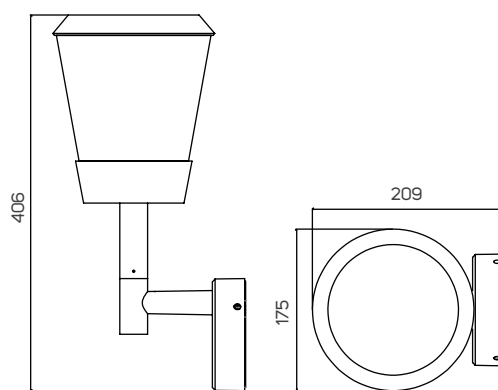

541151, 541152

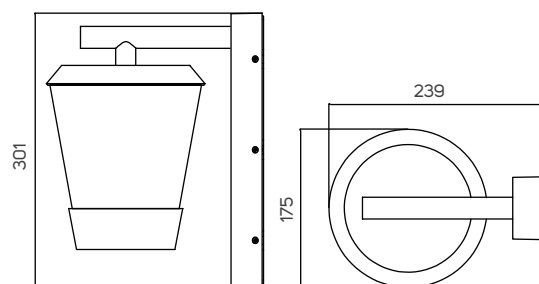

541155, 541156



## LED SURFACE-MOUNTED LUMINAIRE WALL



BEYOND LIGHT..  
TO THE LAST DETAILS!