

L≢ PRO

# SPIKE PROJECTOR LUMINAIRE SERIES



### **AREAS OF APPLICATION**





Hospitality

Shopping Center





Commercial

Educational Center




### **I TECHNICAL OPERATING & ELECTRICAL DATA**

IP Rating	IP65
Voltage	AC220-240V
Frequency	50/60Hz
Lamp Holder Type	GU10
Mounting Type	Surface-mounted on the Ground
Dimmable or Not	No
Directional or Non Directional	Non Directional
Fixed or Adjustable	Adjustable
Life Span	30000h


### **SPECIFICATIONS**

Code No.	Model No.	Body Color	Body Material	Maximum Waltage	Dimensions
612063	ILSSPMOPJF03	black	aluminum	Max. 9W	Ø68x151mm
612464	ILSSPMOPJF03	dark grey	aluminum	Max. 9W	Ø68x151mm
541099	ILSSPMOPJF01	dark gray	aluminum	Max. 20w	89x179x294mm
541131	ILSSPMOPJF02	dark gray	aluminum	Max. 20w	Ø122x138x486mm

## **DIMENSIONS**

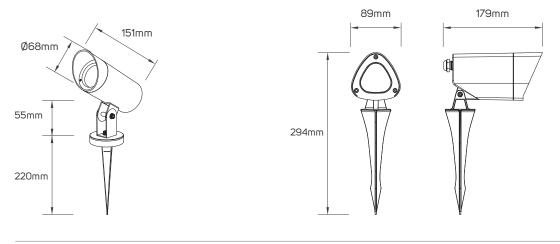


612063 - 612464 541099

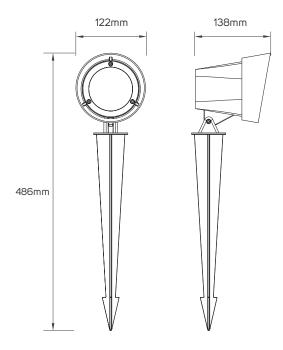

541131

#### **APPLICATION PICTURE**

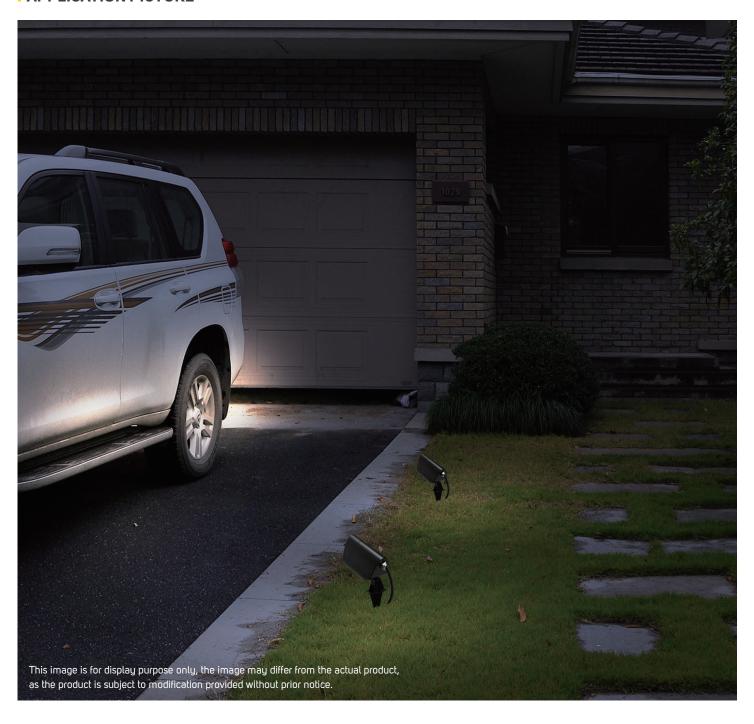

SPIKE PROJECTOR LUMINAIRE SERIES BEYOND LIGHT..
TO THE LAST DETAILS!

