



RECESSED FRAME SERIES 2



**BEYOND LIGHT..
TO THE LAST DETAILS!**

AREAS OF APPLICATION



Hospitality



Shopping Center



Commercial



Educational Center


TECHNICAL OPERATING & ELECTRICAL DATA

IP Ratings	IP20
Body Material	Steel Housing & Die Cast Aluminum Rings
Voltage	AC220-240V
Frequency	50/60Hz
Lamp Holder Type	GU10
Directional or Non Directional	Non Directional
Fixed or Adjustable	Adjustable


SPECIFICATIONS

Code No.	Model No.	Body Color	Maximum Wattage	Mounting Type	Dimensions	Cutting Size
612596	ILSARCF01	black	Max. 9W	recessed luminaire	107x107x135mm	95x95mm
612597	ILSARCF04	black	Max. 9W	recessed luminaire	107x201x135mm	95x190mm
612598	ILSARCF05	black	Max. 9W	recessed luminaire	107x295x135mm	95x285mm
612463	ILSARCF01	white	Max. 9w	recessed in ceiling	Ø108x135mm	Ø98mm
612595	ILSARCF01	black	Max. 9W	recessed in ceiling	Ø108x135mm	Ø98mm


DIMENSIONS

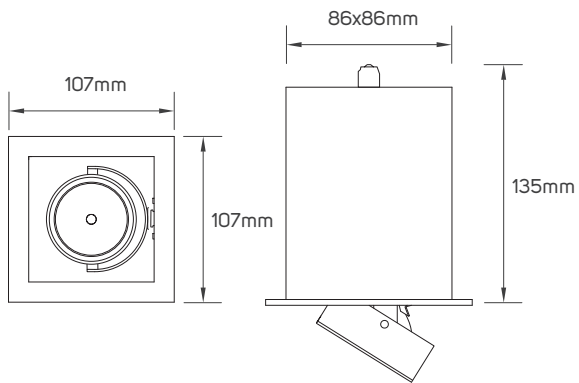


612596

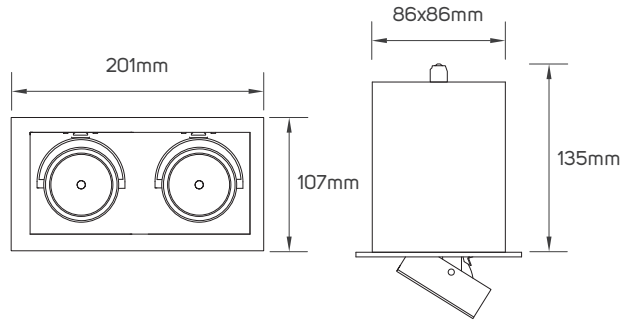

612597

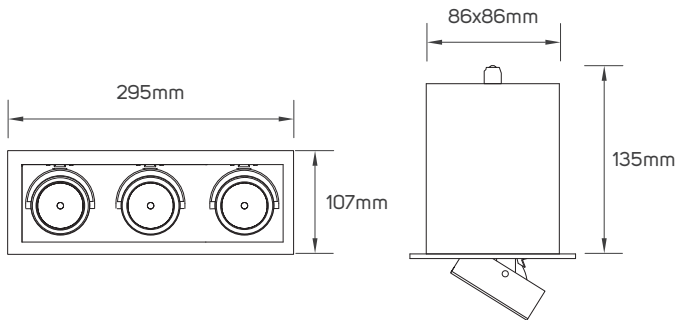

612598

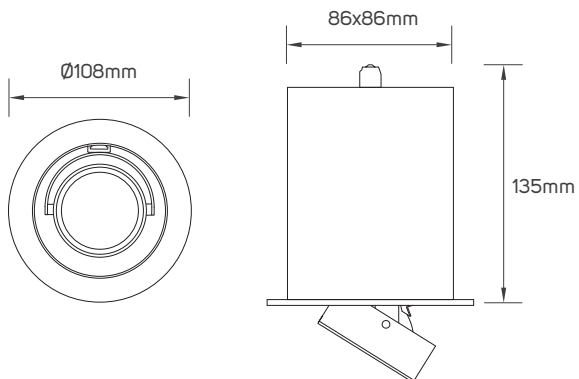

612463 - 612595

APPLICATION PICTURE



This image is for display purpose only, the image may differ from the actual product, as the product is subject to modification provided without prior notice.

RECESSED FRAME SERIES 2

**BEYOND LIGHT..
TO THE LAST DETAILS!**



Carrer de la Vall de la Ballestera, 64, 46015 València, Valencia, España, Tel: +34619824456

www.illusillumination.com

illus illumination reserve the right to make dimensional, design and technical alternations without prior notice. illus illumination endeavor to ensure that any advice, recommendation or information it provides in product literature is accurate and correct. However due to the fact that illus do not have direct control on where and how the products are installed, illus illumination cannot accept any liability either direct or indirect arising from the use of illus products whether or not in accordance with any advice, specification, recommendation or information provided by illus illumination or its distributors.