

**□**≢ PRO

## Simple & Flexible Solution

### LED WALL GRAZER

#### PRODUCT INFORMATION

- Excellently anti-dust LED with professional design to guarantee lighting performance.
- It not only ensure high quality of lighting color consistency but also protect products against from harsh environments.
- ILLUS LED Wall Grazer Light gives the customer the flexibility to choose between single color and R/G/B optional based on their specific need with lumen package from 666 lm to 2124 lm.

#### **BENEFITS**

- Vivid light color.
- Less maintenance cost and less concerns.

#### **FEATURES**

- High CRI>80.
- Operating voltage AC220-240V.



#### **AREAS OF APPLICATION**





Hospitality

Shopping Center





Commercial

Educational Center




#### **I TECHNICAL OPERATING & ELECTRICAL DATA**

Lumen	from 666 to 2124lm/M+/-10%
Input Voltage	AC220-240V
Input Current	109mA
Housing	Die-casting Aluminum
Chip	24PCSx1W@OSRAM
Size	1000x48x108mm
Finish	Dark Grey
Beam Angle	15x60°
Driver	MeanWell (LPV-35)

#### **SPECIFICATIONS**

Code No.	Model No.	IP	Power	Lumen	CRI	CCT
611609	ILS24ACWGLL830WW01	65	24W	2124lm	80	3000K
611610	ILS24ACWGLLRGB01	65	24W	666lm	80	R/G/B DMX512

#### **DIMENSIONS**




611609 - 611610

# ACCESSORIES LED WALL GRAZER CONNECTOR AVAILABLE AS AN ACCESSORY

Code No.	Model No.	IP	Power	Input	Output	Frequency	Dimensions
611781	ILSDMXRC01	20		DC24V			33x97x18mm
611782	ILSDMXSA01	66		DC24V			50x90x30mm
611783	ILSDMXC01	44		DC24V			92x174x33mm
/	ILSLVMDMXCD01	44		AC220V		50/60Hz	150x250x45mm
/	ILSLVSDMXCD01	44					150x250x45mm
/	ILSLVMDMXCD02	44		AC220V		50/60HZ	150x250x45mm
611784	ILSDMX5SW01						L=5000mm
611785	ILSDMX10SW01						L=10000mm
611786	ILSDMX20SW01						L=20000mm

#### **APPLICATION PICTURE**

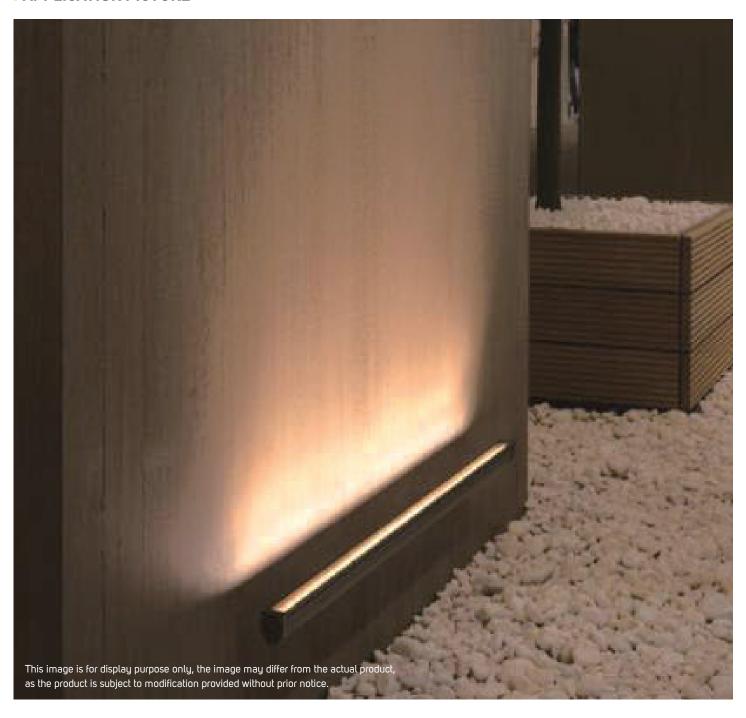

LED Wall Grazer

BEYOND LIGHT..
TO THE LAST DETAILS!

