

■≢ PRO

Simple & Flexible Solution

LED FLEXIBLE LINEAR LIGHT

PRODUCT INFORMATION

- Excellently anti-dust LED strips with professional design to guarantee lighting performance.
- It not only ensure high quality of lighting color consistency but also protect products against from harsh environments.
- ILLUS LED FLEXIBLE LINEAR Light gives the customer the flexibility to choose between 7 CCT based on their specific need with lumen package from 560 lm to 880 lm.

BENEFITS

- Vivid light color.
- Less maintenance cost and less concerns.

FEATURES

- High CRI>95.
- Operating voltage DC24V.



AREAS OF APPLICATION





Hospitality

Shopping Center





Commercial

Educational Center


I TECHNICAL OPERATING & ELECTRICAL DATA

IP Rating	IP20
Power	8W/M
Lumen	from 560-880lm/M+/-10%
LED Quantity	126pcs/meter
Input	DC24V
Maximum Length	5M/Reel
Cutting Unit	Each 7 led per cut (cutting space 5cm)
FPCB Size	5x1.2mm (30Z)
Packging	Male & female DC connector, 5m/reel into a anti-static bag, 20 bags into a master carton
Other Features	Use with aluminum profile is recommended

SPECIFICATIONS

Code No.	Model No.	Lumen	CRI	CCT
611852	ILS08LVST918WW01	560lm	95	1800K
611853	ILS08LVST922WW01	700lm	95	2200K
611854	ILS08LVST927WW01	790lm	95	2700K
611855	ILS08LVST930WW01	830lm	95	3000K
611856	ILS08LVST935WW01	850lm	95	3500K
611857	ILS08LVST940NW01	860lm	95	4000K
611858	ILS08LVST950DL01	880lm	95	5000K

DIMENSIONS




611852 - 611853 - 611854 - 611855 - 611856 - 611857 - 611858

ACCESSORIES LED FLEXIBLE LINEAR LIGHT CONNECTOR AVAILABLE AS AN ACCESSORY

Code No.	Model No.	Power	Input	Output	Frequency	Dimensions
611944	ILSLVRFDIMMCD01	144W	DC24V	DC24V	433.92Hz	40x85x6mm
611948	ILS75W24VCG01	75W	AC220-240V	DC24V	50/60Hz	78x110x36mm
611949	ILS100W24VCG01	100W	AC220-240V	DC24V	50/60Hz	98x130x41mm
611950	ILS150W24VCG01	150W	AC220-240V	DC24V	50/60Hz	98x160x50mm

APPLICATION PICTURE

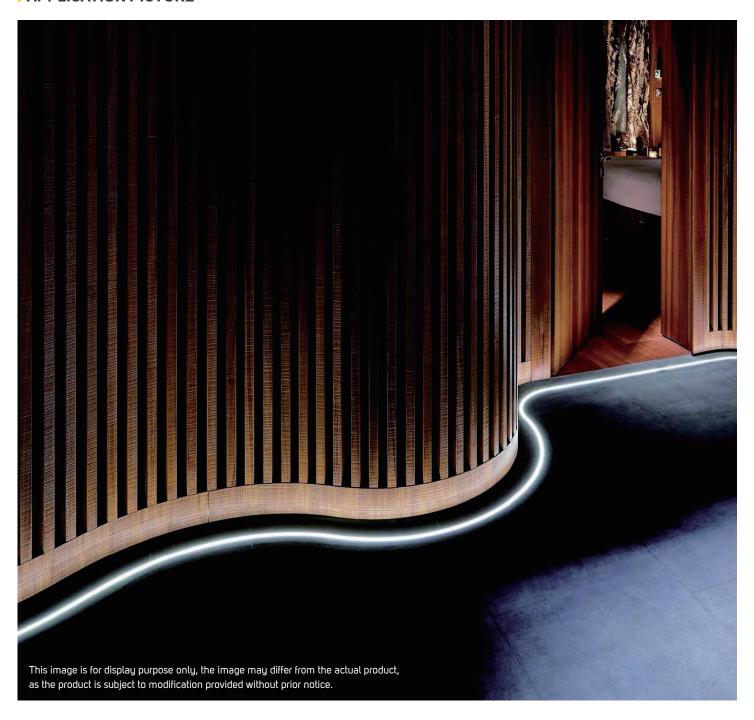

LED FLEXIBLE LINEAR LIGHT BEYOND LIGHT..
TO THE LAST DETAILS!

