



LED PRO

Simple & Flexible Solution

LED FLEXIBLE LINEAR LIGHT

PRODUCT INFORMATION

- Excellently waterproof and anti-dust LED strips with professional design to guarantee lighting performance.
- It not only ensure high quality of lighting color consistency but also protect products outdoor against from harsh environments outdoors.
- ILLUS LED FLEXIBLE LINEAR Light gives the customer the flexibility to choose between 7 CCT based on their specific need with lumen package from 730 lm to 1140 lm.

BENEFITS

- Water proof and vivid light color.
- Less maintenance cost and less concerns on water invasion.

FEATURES

- High CRI>92.
- Operating voltage DC192V.



**BEYOND LIGHT..
TO THE LAST DETAILS!**

AREAS OF APPLICATION



Hospitality



Shopping Center



Commercial



Educational Center


TECHNICAL OPERATING & ELECTRICAL DATA

IP Rating	IP65, PVC anti-UV
Power	11W
Lumen	from 730 to 1140lm/M+/-10%
LED Quantity	120pcs/meter
PCB	Single PCB whole thickness 0.15mm, white color, 12mm, copper thickness 25um
Chip Size	2.8x3.5x0.8mm
L70	>20000H
Input	DC192V
Copper Wire	0.15mm x 18pcs
Maximum Length	40M/Reel (Max connection L=30M)
Cutting Unit	1 meter
Size	18x8mm
Other Features	w/o power cord, sold separately

SPECIFICATIONS

Code No.	Model No.	Lumen	CRI	CCT
611826	ILS11HVST918WW01	730lm	92	1800K
611827	ILS11HVST922WW01	900lm	92	2200K
611828	ILS11HVST927WW01	1020lm	92	2700K
611829	ILS11HVST930WW01	1060lm	92	3000K
611830	ILS11HVST935WW01	1080lm	92	3500K
611831	ILS11HVST940NW01	1100lm	92	4000K
611832	ILS11HVST950DL01	1140lm	92	5000K

DIMENSIONS

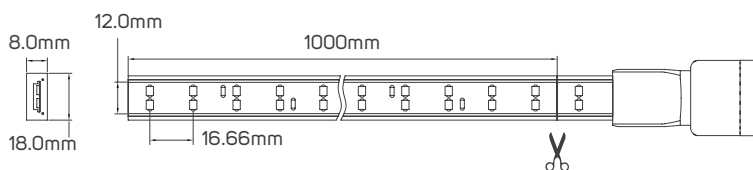


611826 - 611827 - 611828 - 611829 - 611830 - 611831 - 611832

ACCESSORIES


LED FLEXIBLE LINEAR LIGHT CONNECTOR
AVAILABLE AS AN ACCESSORY

Code No.	Model No.	Power	Input	Output	Frequency	Dimensions
612421	ILSHVST2HFC03					
612423	ILSHVST3HFC01					
612424	ILSHVST4HFC01					
612416	ILSHVST2HFC02					
611791	ILSACSTPCCH02					1000x20.1x8mm
611932	ILSHVST2H2PC02					L=200mm
611794	ILSHVST2H2PC02					L300mm
611943	ILSHVRFDIMCD01	345W	DC192V	DC192V	433.92MHz	35x88.5x33mm
611927	ILS250HVFLLCG01	230W	AC220-240V	DC192V	50/60Hz	42x146x33mm
611928	ILS400HVFLLCG01	345W	AC220-240V	DC192V	50/60Hz	42x146x33mm


ACCESSORIES DIMENSIONS

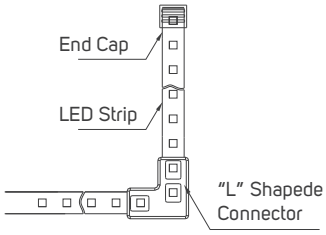


612421 - Middle Connector

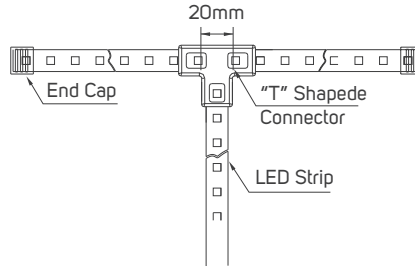


612423- Middle Connector

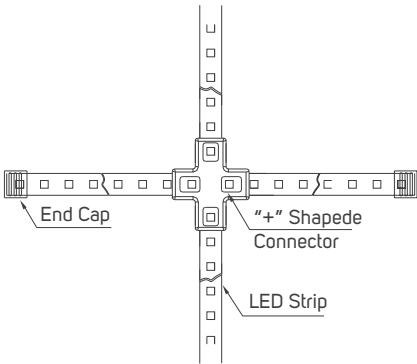


612424 - Middle Connector

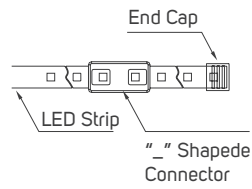


612416 - Middle Connector




611791 - PVC Profile



611932 - Jumper



611943 - Dimmer



611794 - Jumper



611927 - 611928 - Flicker free driver

APPLICATION PICTURE



This image is for display purpose only, the image may differ from the actual product, as the product is subject to modification provided without prior notice.

LED FLEXIBLE LINEAR LIGHT

**BEYOND LIGHT..
TO THE LAST DETAILS!**



Carrer de la Vall de la Ballestera, 64, 46015 València, Valencia, España, Tel: +34619824456

www.illusillumination.com

illus illumination reserve the right to make dimensional, design and technical alternations without prior notice. illus illumination endeavor to ensure that any advice, recommendation or information it provides in product literature is accurate and correct. However due to the fact that illus do not have direct control on where and how the products are installed, illus illumination cannot accept any liability either direct or indirect arising from the use of illus products whether or not in accordance with any advice, specification, recommendation or information provided by illus illumination or its distributors.