

□≢ PRO

Simple & Flexible Solution

LED WALL GRAZER

PRODUCT INFORMATION

- Excellently anti-dust LED with professional design to guarantee lighting performance.
- It not only ensure high quality of lighting color consistency but also protect products against from harsh environments.
- ILLUS LED Wall Grazer Light gives the customer the flexibility to choose between single color and R/G/B optional based on their specific need with lumen package from 1077 lm to 3122 lm.

BENEFITS

- Vivid light color.
- Less maintenance cost and less concerns.

FEATURES

- High CRI>80.
- Operating voltage AC220-240V.



AREAS OF APPLICATION





Hospitality

Shopping Center





Commercial

Educational Center


I TECHNICAL OPERATING & ELECTRICAL DATA

Lumen	from 1077-3122lm/M
Input Voltage	AC220-240V
Input Current	164mA
Housing	Die-casting Aluminum
Chip	36PCSx1W@OSRAM
Size	1000x48x108mm
Finish	Dark Grey
Beam Angle	15x60°
Driver	MeanWell (LPV-35)

SPECIFICATIONS

Code No.	Model No.	IP	Power	Lumen	CRI	CCT
611611	ILS36ACWGLL830WW01	65	36W	3122lm	80	3000K
611612	ILS36ACWGLLRGB01	65	36W	1077lm	80	R/G/B DMX512

DIMENSIONS




611611 - 611612

ACCESSORIES LED WALL GRAZER CONNECTOR AVAILABLE AS AN ACCESSORY

Code No.	Model No.	IP	Power	Input	Output	Frequency	Dimensions
611781	ILSDMXRC01	20		DC24V			33x97x18mm
611782	ILSDMXSA01	66		DC24V			50x90x30mm
611783	ILSDMXC01	44		DC24V			92x174x33mm
/	ILSLVMDMXCD01	44		AC220V		50/60Hz	150x250x45mm
/	ILSLVSDMXCD01	44					150x250x45mm
/	ILSLVMDMXCD02	44		AC220V		50/60HZ	150x250x45mm
611784	ILSDMX5SW01						L=5000mm
611785	ILSDMX10SW01						L=10000mm
611786	ILSDMX20SW01						L=20000mm

APPLICATION PICTURE

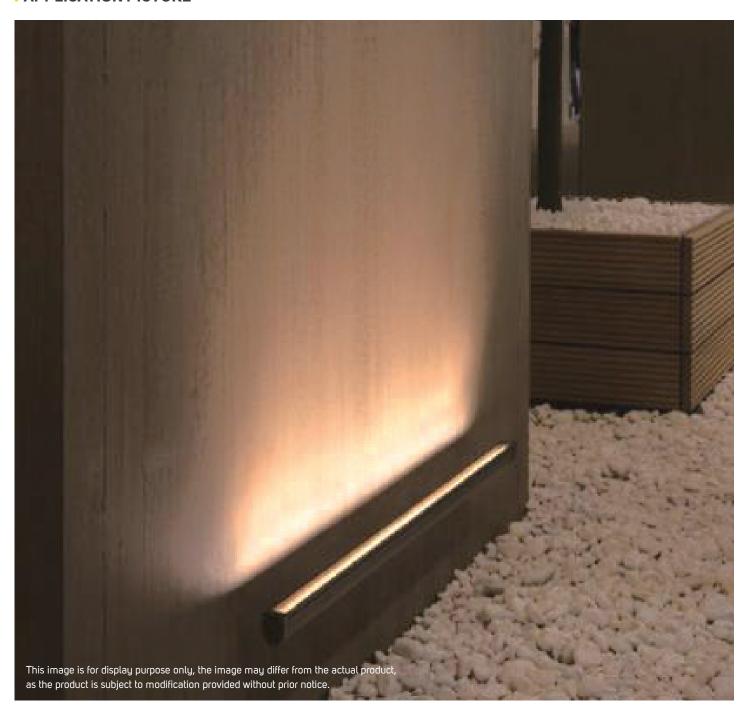

LED WALL GRAZER BEYOND LIGHT..
TO THE LAST DETAILS!

