



LED PRO

Simple & Flexible Solution

LED FLEXIBLE LINEAR LIGHT

PRODUCT INFORMATION

- Excellently waterproof and anti-dust LED strips with professional design to guarantee lighting performance.
- It not only ensure high quality of lighting color consistency but also protect products outdoor against from harsh environments outdoors.
- ILLUS LED FLEXIBLE LINEAR Light gives the customer the flexibility to choose between 5 CCT based on their specific need with lumen package from 330 lm to 490 lm.

BENEFITS

- Water proof and vivid light color.
- Less maintenance cost and less concerns on water invasion.

FEATURES

- High CRI>92.
- Operating voltage DC192V.



**BEYOND LIGHT..
TO THE LAST DETAILS!**

AREAS OF APPLICATION



Hospitality



Shopping Center



Commercial



Educational center


TECHNICAL OPERATING & ELECTRICAL DATA

IP rating	IP65, PVC
Power	10W/M
Lumen	from 330 to 490lm/M+/-10%
LED Quantity	120pcs/meter
PCB	PCB whole thickness 0.15mm, white color, 8mm, copper thickness 25um.
Chip Size	2.8x3.5x0.8mm
L70	>20000H
Input	DC192V
Copper Wire	0.18mm x 28pcs
Maximum Length	40 meters
Cutting Unit	1 meter cuttable
Size	26x15mm
Other Features	w/o power cord, sold separately

SPECIFICATIONS

Code No.	Model No.	Lumen	CRI	CCT
611833	ILS10HVNF918WW01	330lm	92	1800K
611835	ILS10HVNF927WW02	450lm	92	2700K
611837	ILS10HVNF935WW01	470lm	92	3500K
611838	ILS10HVNF940NW01	480lm	92	4000K
611839	ILS10HVNF950DL01	490lm	92	5000K

DIMENSIONS

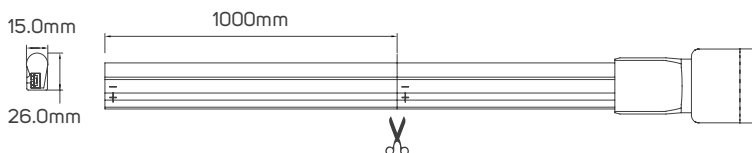


611833 - 611835 - 611837 - 611838 - 611839

ACCESSORIES


LED FLEXIBLE LINEAR LIGHT CONNECTOR
AVAILABLE AS AN ACCESSORY

Code No.	Model No.	IP	Power	Input	Output	Frequency	Dimensions
612418	ILSHVNF2HFC02						
611788	ILSHVNFALMFCH01						1000x18.2x20mm
611133	ILSNFALMCH01						L=50mm
611933	ILSHVNF2H2PC01						L=200mm
611795	ILSHVNF2H2PC01						L=300mm
611943	ILSHVRFDIMMCD01	65	345W	DC192V	DC192V	433.92MHz	35x88.5x33mm
611927	ILS250HVFLLCG01	65	230W	AC220-240V	DC192V	50/60Hz	42x146x33mm
611928	ILS400HVFLLCG01	65	345W	AC220-240V	DC192V	50/60Hz	42x146x33mm


ACCESSORIES DIMENSIONS




612418 - Middle Connector




611788 - Aluminum Profile




611133 - Aluminum Clip



611933 - Jumper



611943 - Dimmer



611795 - Jumper



611927 - 611928 - Flicker free driver

APPLICATION PICTURE



This image is for display purpose only, the image may differ from the actual product, as the product is subject to modification provided without prior notice.

LED FLEXIBLE LINEAR LIGHT

**BEYOND LIGHT..
TO THE LAST DETAILS!**



Carrer de la Vall de la Ballestera, 64, 46015 València, Valencia, España, Tel: +34619824456

www.illusillumination.com

illus illumination reserve the right to make dimensional, design and technical alternations without prior notice. illus illumination endeavor to ensure that any advice, recommendation or information it provides in product literature is accurate and correct. However due to the fact that illus do not have direct control on where and how the products are installed, illus illumination cannot accept any liability either direct or indirect arising from the use of illus products whether or not in accordance with any advice, specification, recommendation or information provided by illus illumination or its distributors.