



LED PRO

Simple & Flexible Solution

LED FLEXIBLE LINEAR LIGHT

PRODUCT INFORMATION

- Excellently waterproof and anti-dust LED strips with professional design to guarantee lighting performance.
- It not only ensure high quality of lighting color consistency but also protect products outdoor against from harsh environments outdoors.

BENEFITS

- Water proof and vivid light color.
- Less maintenance cost and less concerns on water invasion.

FEATURES

- High CRI>92.
- Operating voltage DC226V.

AREAS OF APPLICATION



Hospitality



Shopping Center



Commercial



Educational Center


TECHNICAL OPERATING & ELECTRICAL DATA

IP Rating	IP65, PVC anti-UV
Power	8W/M
Lumen	60pcs/meter
LED Quantity	450lm/M+/-10%
PCB	Single PCB whole thickness 0.15mm, white color, 10mm, copper thickness 25um
Chip Size	5.0x5.0x1.2mm
L70	>20000H
Input	DC226V
Copper Wire	0.15mm x 18pcs
Maximum Length	40M / Reel
Cutting Unit	1 meter
Size	18x8mm
Other Features	Each roll without controller (sold separately)

SPECIFICATIONS

Code No.	Model No.	Lumen	CRI	CCT
611849	ILS08HVST92250TN01	450lm	92	2200K/5000K

DIMENSIONS

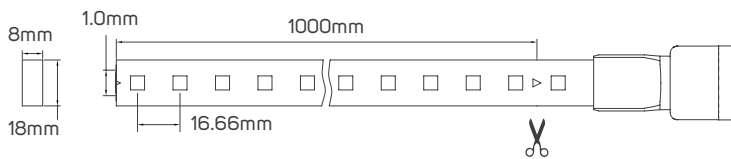


611849

ACCESSORIES


LED FLEXIBLE LINEAR LIGHT CONNECTOR
AVAILABLE AS AN ACCESSORY

Code No.	Model No.	IP	Power	Input	Output	Frequency	Dimensions
611938	ILSHVST2H3PC02						L=200mm
611975	ILSHVST2H3PC01						L=300mm
611940	ILSHVRFCTCD01	65	361W	DC226V	DC226V	50/60Hz	35x88.5x33mm
611929	ILS250HVFLLCG02	65	248W	AC220-240V	DC226V	50/60Hz	42x146x33mm
611930	ILS400HVFLLCG02	65	361W	AC220-240V	DC226V	50/60Hz	42x146x33mm


ACCESSORIES DIMENSIONS



611938 - Jumper



611940 - CCT controller



611975 - Jumper



611929 - 611930 - Flicker-free driver

APPLICATION PICTURE



This image is for display purpose only, the image may differ from the actual product, as the product is subject to modification provided without prior notice.

LED FLEXIBLE LINEAR LIGHT

**BEYOND LIGHT..
TO THE LAST DETAILS!**



Carrer de la Vall de la Ballestera, 64, 46015 València, Valencia, España, Tel: +34619824456

www.illusillumination.com

illus illumination reserve the right to make dimensional, design and technical alternations without prior notice. illus illumination endeavor to ensure that any advice, recommendation or information it provides in product literature is accurate and correct. However due to the fact that illus do not have direct control on where and how the products are installed, illus illumination cannot accept any liability either direct or indirect arising from the use of illus products whether or not in accordance with any advice, specification, recommendation or information provided by illus illumination or its distributors.