



Simple **Design**, Sharp **Edges**

LED RECESSED CEILING LUMINAIRE SERIES

PRODUCT INFORMATION

- Suitable for a series of lighting applications in office, retail and general area lighting.
- Available in a wide variety of lumen packs, cut out size and color temperature.
- ILLUS LED RECESSED CEILING Luminaire gives the customer the flexibility to choose between 12 models based on their specific need with lumen package from 465 lm to 2100 lm.

BENEFITS

- Compact design for better integration with the building.
- Comfortable light with high efficiency
- Reliable performance for indoor applications.

FEATURES

- High CRI>90.
- Efficacy up to 90 lm/w.
- Long life span 30,000 hrs.
- Operating voltage 220 – 240 V
- Non – dimmable.

AREAS OF APPLICATION



Hospitality



Public indoor



Shopping Center



Commercial



Workplace



Educational center



TECHNICAL OPERATING & ELECTRICAL DATA


Input Voltage & Frequency	AC220-240V, 50/60Hz
Rated CRI	90
Beam Angle	90°
Life Span	30.000 hs
Ingress Protection Rating	IP20
Dimming	Non-Dimmable
Ambient Temperature	-20~+45°C
Switching Cycle ON/OFF	100,000

SPECIFICATIONS


Code No.	Model No.	Power	CCT	Lumen	Efficacy	Current
612337	ILS5.6RCL930WW03	5.6W	3000K	465	83	29 mA
612338	ILS5.6RCL940NW03	5.6W	4000K	480	86	30 mA
612339	ILS5.6RCL950DL03	5.6W	5000K	490	88	30 mA
612340	ILS7.8RCL930WW02	7.8W	3000K	660	85	39 mA
612341	ILS7.8RCL940NW02	7.8W	4000K	680	87	39 mA
612342	ILS7.8RCL950DL02	7.8W	5000K	700	90	39 mA
612343	ILS16RCL930WW03	16W	3000K	1280	80	78 mA
612344	ILS16RCL940NW03	16W	4000K	1330	83	79 mA
612345	ILS16RCL950DL03	16W	5000K	1350	84	79 mA
612346	ILS24RCL930WW03	24W	3000K	1950	81	112 mA
612347	ILS24RCL940NW03	24W	4000K	1990	83	115 mA
612348	ILS24RCL950DL03	24W	5000K	2100	88	115 mA

DIMENSIONS


Code No.	Model No.	Dimensions
612337	ILS5.6RCL930WW03	94x94x54mm
612338	ILS5.6RCL940NW03	94x94x54mm
612339	ILS5.6RCL950DL03	94x94x54mm
612340	ILS7.8RCL930WW02	106x106x56mm
612341	ILS7.8RCL940NW02	106x106x56mm
612342	ILS7.8RCL950DL02	106x106x56mm
612343	ILS16RCL930WW03	165x165x75mm
612344	ILS16RCL940NW03	165x165x75mm
612345	ILS16RCL950DL03	165x165x75mm
612346	ILS24RCL930WW03	216x216x90mm
612347	ILS24RCL940NW03	216x216x90mm
612348	ILS24RCL950DL03	216x216x90mm

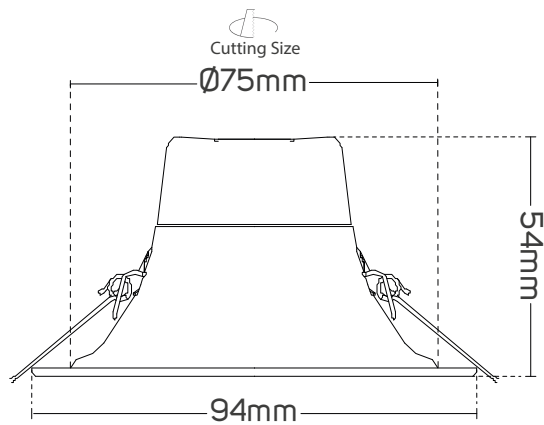


612339 - 612338 - 612337

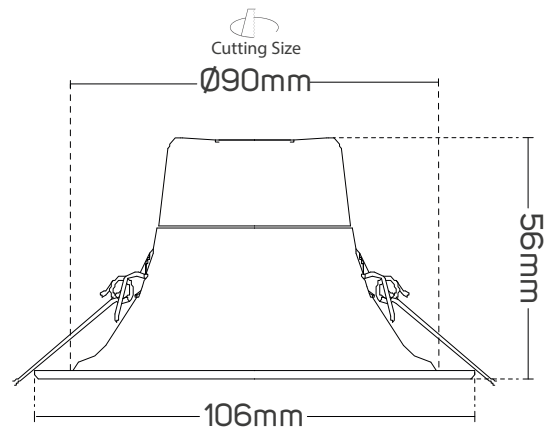

612342 - 612341 - 612340












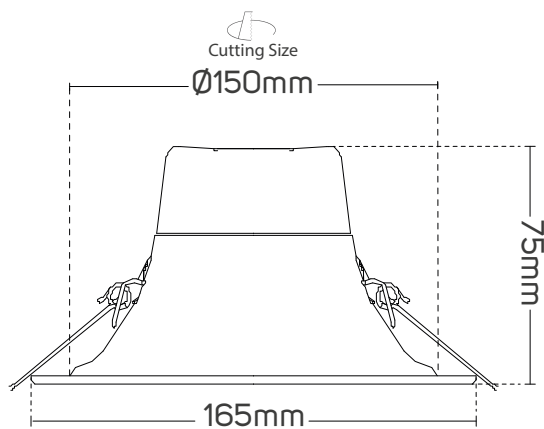


612345 - 612344 - 612343

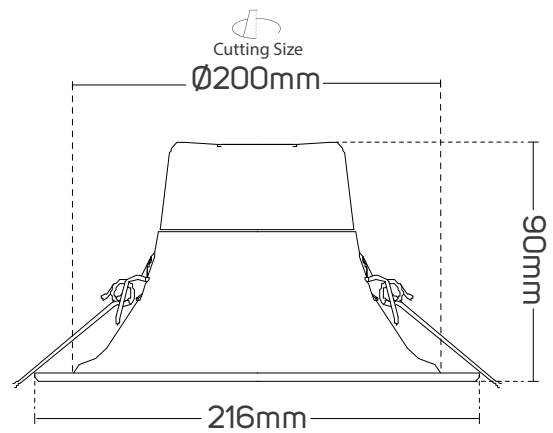

612348 - 612347 - 612346

PHOTOMETRIC DATA

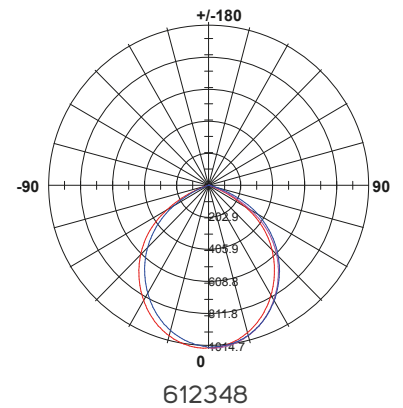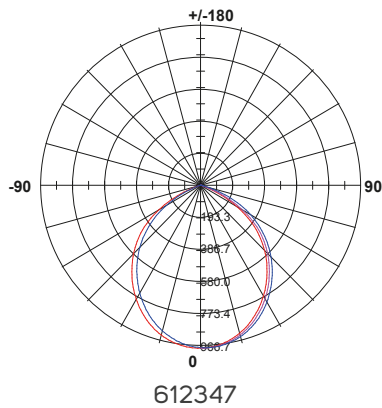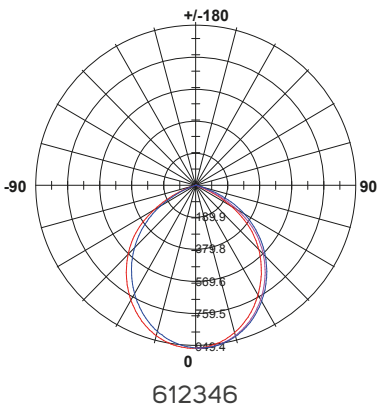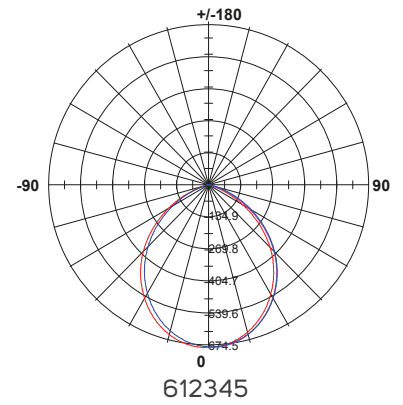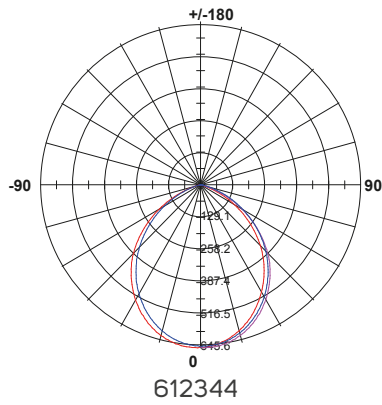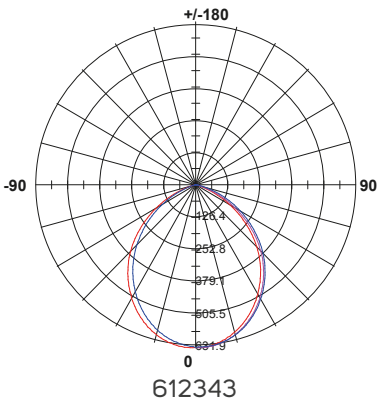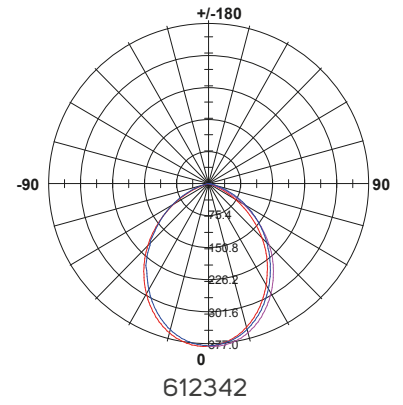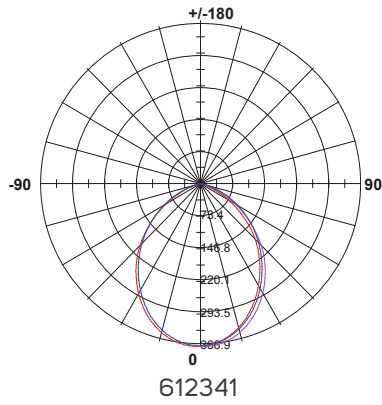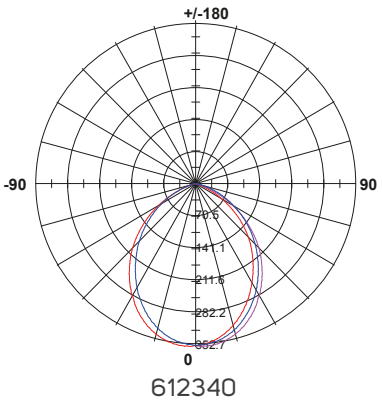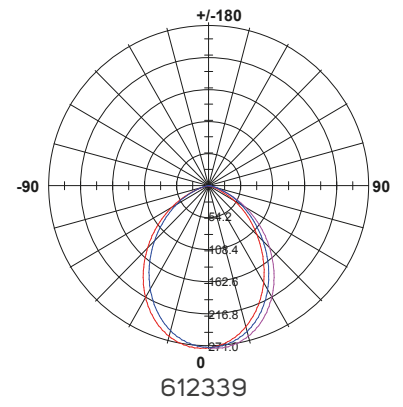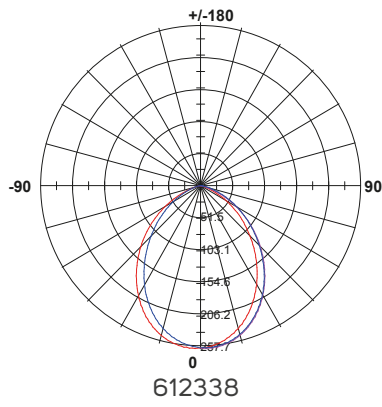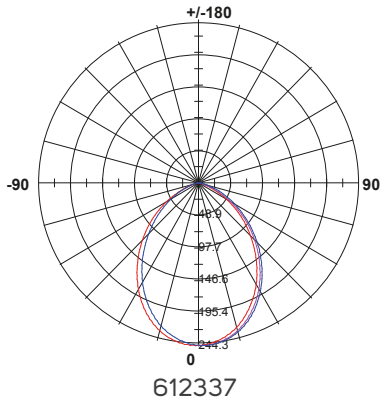

APPLICATION PICTURE



This image is for display purpose only, the image may differ from the actual product, as the product is subject to modification provided without prior notice.

LED RECESSED CEILING LUMINAIRE SERIES

**BEYOND LIGHT..
TO THE LAST DETAILS!**



Carrer de la Vall de la Ballestera, 64, 46015 València, Valencia, España, Tel: +34619824456

www.illusillumination.com

illuS illumination reserve the right to make dimensional, design and technical alternations without prior notice. illuS illumination endeavor to ensure that any advice, recommendation or information it provides in product literature is accurate and correct. However due to the fact that illuS do not have direct control on where and how the products are installed, illuS illumination cannot accept any liability either direct or indirect arising from the use of illuS products whether or not in accordance with any advice, specification, recommendation or information provided by illuS illumination or its distributors.

09092021V1