



LED

Unique **Design**, Round **Shape**

LED RECESSED CEILING LUMINAIRE SERIES

PRODUCT INFORMATION

- Suitable for a series of lighting applications in office, retail and general area lighting.
- Available in a wide variety of lumen packs, cut out size and color temperature.
- ILLUS LED RECESSED CEILING Luminaire gives the customer the flexibility
To choose between 12 models based on their specific need with lumen package from 510 lm to 2600 lm.

BENEFITS

- Compact design for better integration with the building.
- Comfortable light with high efficiency
- Reliable performance for indoor applications.

FEATURES

- High CRI>90.
- Efficacy up to 98 lm/w.
- Long life span 35,000 hrs.
- Operating voltage 220 – 240 V
- Non – Dimmable.



**BEYOND LIGHT..
TO THE LAST DETAILS!**

AREAS OF APPLICATION



Hospitality



Public indoor



Shopping Center



Commercial



Workplace



Educational center



TECHNICAL OPERATING & ELECTRICAL DATA


Input Voltage & Frequency	AC220-240V, 50/60Hz
Rated CRI	90
Beam Angle	90°
Life Span	35.000 hs
Ingress Protection Rating	IP20
Dimming	Non-Dimmable
Ambient Temperature	-20°C~+45°C
Switching Cycle ON/OFF	100,000

SPECIFICATIONS


Code No.	Model No.	Power	CCT	Lumen	Efficacy	Current
612361	ILS6.8RCL930WW01	6.8W	3000K	510	75	34 mA
612362	ILS6.8RCL940NW01	6.8W	4000K	540	79	34 mA
612363	ILS6.8RCL950DL01	6.8W	5000K	550	81	34 mA
612364	ILS9.8RCL930WW01	9.8W	3000K	810	83	43 mA
612365	ILS9.8RCL940NW01	9.8W	4000K	840	86	44 mA
612366	ILS9.8RCL950DL01	9.8W	5000K	870	89	43 mA
612367	ILS19RCL930WW01	19W	3000K	1790	94	88 mA
612368	ILS19RCL940NW01	19W	4000K	1850	97	88 mA
612369	ILS19RCL950DL01	19W	5000K	1870	98	88 mA
612370	ILS29RCL930WW01	29W	3000K	2450	84	120 mA
612371	ILS29RCL940NW01	29W	4000K	2550	88	119 mA
612372	ILS29RCL950DL01	29W	5000K	2600	90	121 mA

DIMENSIONS


Code No.	Model No.	Dimensions
612361	ILS6.8RCL930WW01	Ø78x55mm
612362	ILS6.8RCL940NW01	Ø78x55mm
612363	ILS6.8RCL950DL01	Ø78x55mm
612364	ILS9.8RCL930WW01	Ø103x58mm
612365	ILS9.8RCL940NW01	Ø103x58mm
612366	ILS9.8RCL950DL01	Ø103x58mm
612367	ILS19RCL930WW01	Ø153x58mm
612368	ILS19RCL940NW01	Ø153x58mm
612369	ILS19RCL950DL01	Ø153x58mm
612370	ILS29RCL930WW01	Ø211x58mm
612371	ILS29RCL940NW01	Ø211x58mm
612372	ILS29RCL950DL01	Ø211x58mm

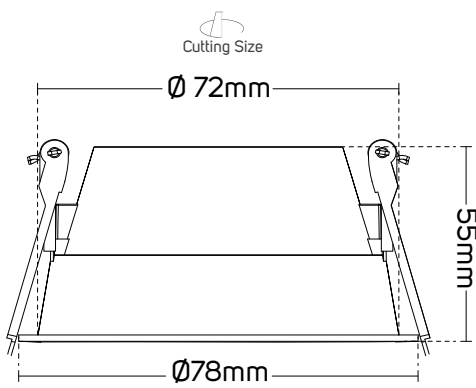


612363 - 612362 - 612361

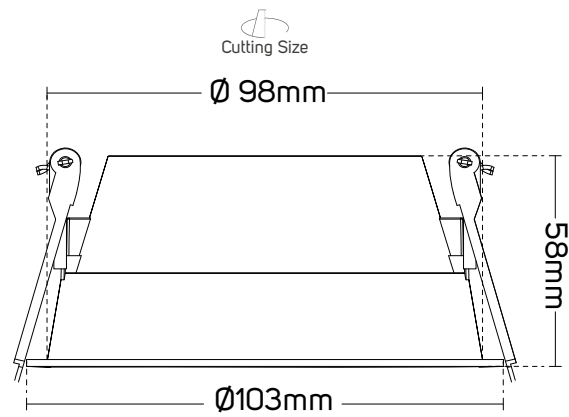

612366 - 612365 - 612364

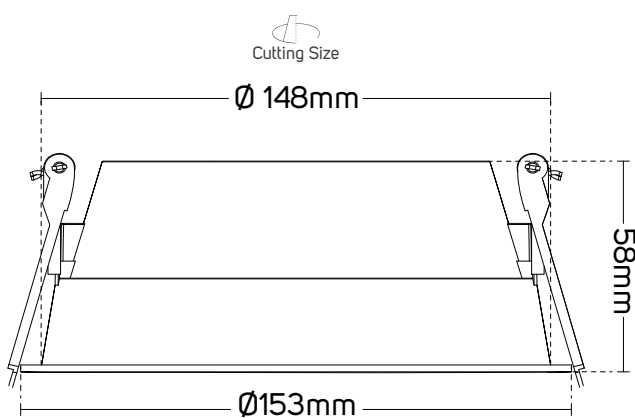


612369 - 612368 - 612367

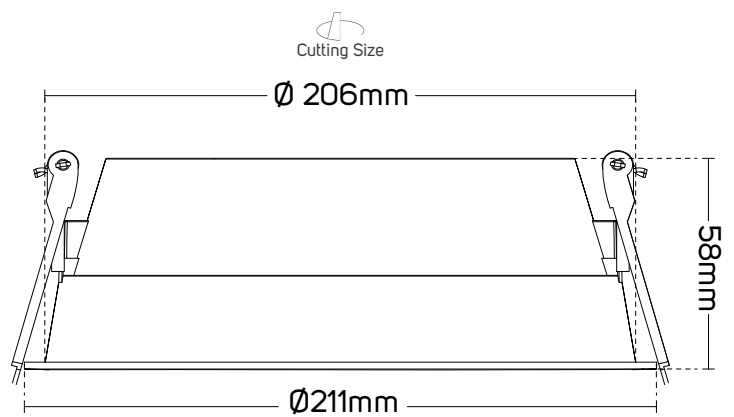


612372 - 612371 - 612370


PHOTOMETRIC DATA

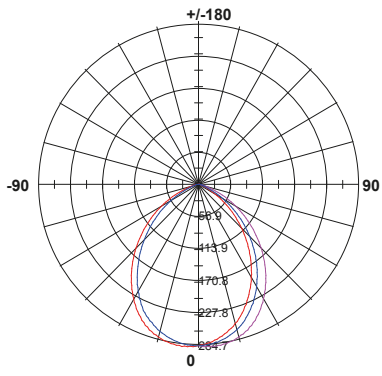


612361

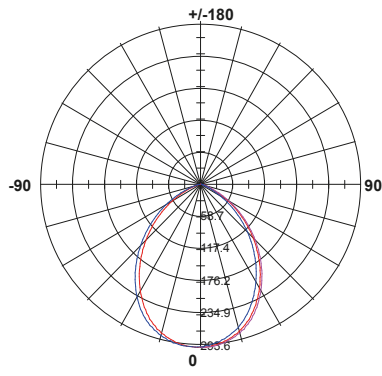


612362

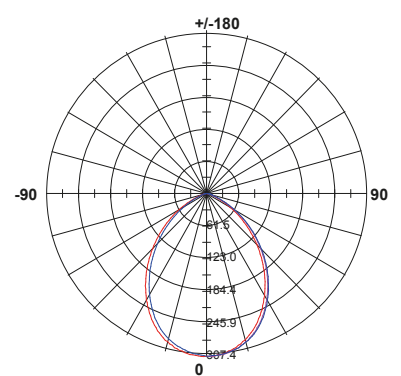


612363

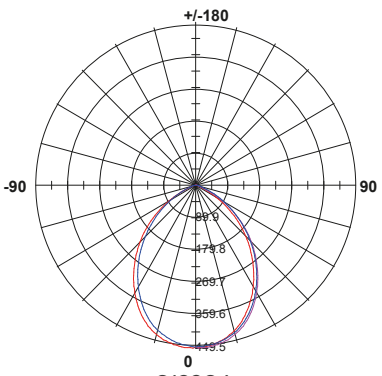


612364

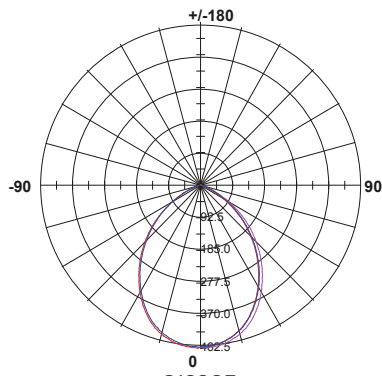


612365

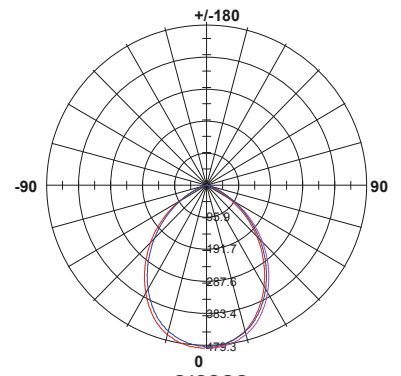


612366

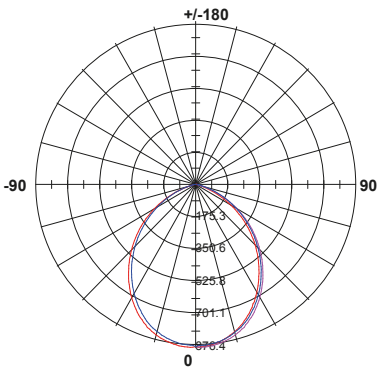


612367

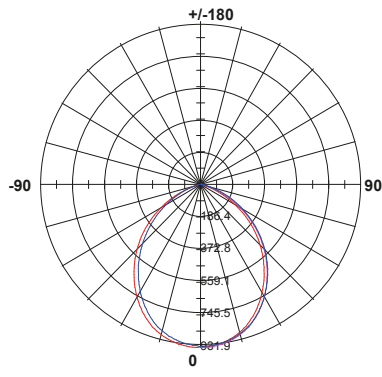


612368

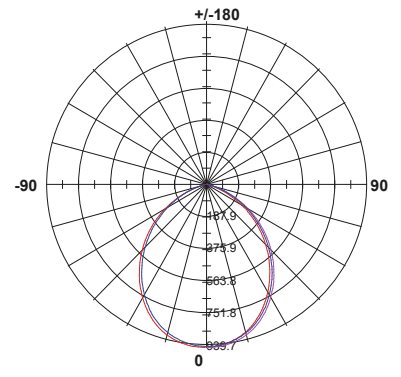


612369

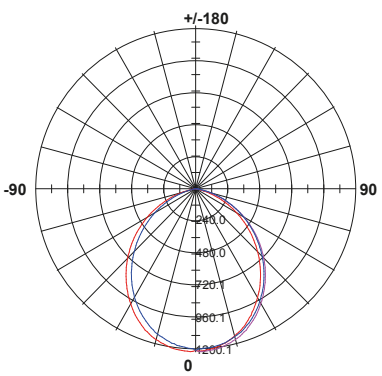

612370

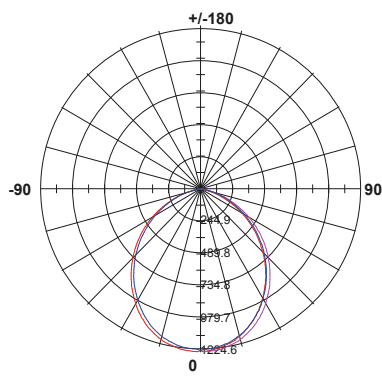

612371

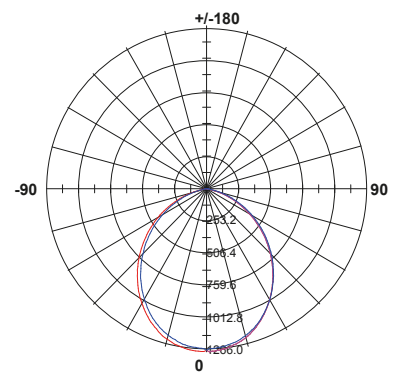

612372

APPLICATION PICTURE



This image is for display purpose only, the image may differ from the actual product, as the product is subject to modification provided without prior notice.

LED RECESSED CEILING LUMINAIRE SERIES

BEYOND LIGHT..
TO THE LAST DETAILS!

