

PRO

Simple & Flexible Solution

LED FLEXIBLE LINEAR LIGHT

PRODUCT INFORMATION

- Excellently anti-dust LED strips with professional design to guarantee lighting performance.
- It not only ensure high quality of lighting color consistency but also protect products against from harsh environments.
- ILLUS LED FLEXIBLE LINEAR Light gives the customer the flexibility to choose between 7 CCT based on their specific need with lumen package from 720 lm to 1040 lm.

BENEFITS

- Vivid light color.
- Less maintenance cost and less concerns.

FEATURES

- High CRI>95.
- Operating voltage DC24V.



AREAS OF APPLICATION





Hospitality

Shopping Center





Commercial

Educational Center


TECHNICAL OPERATING & ELECTRICAL DATA

IP Rating	IP20
Power	10W
Lumen	from 720-1040lm/M+/-10%
LED Quantity	126pcs/meter
PCB	Double PCB whole thickness 0.25mm, white color, 10mm, copper thickness 25um x 3pcs (3OZ)
Chip Size	2.8x3.5x0.8mm
L70	>20000H
Input	DC24V
Maximum Length	5M/Reel
Cutting Unit	Each 7 led is cuttable (cutting space 5.5cm)
Packging	Male & female DC connector, 5m/reel into a anti-static bag, 20 bags into a master carton

SPECIFICATIONS

Code No.	Model No.	Lumen	CRI	CCT
611859	ILS10LVST918WW01	720lm	95	1800K
611860	ILS10LVST922WW01	900lm	95	2200K
611861	ILS10LVST927WW01	960lm	95	2700K
611862	ILS10LVST930WW01	1000lm	95	3000K
611863	ILS10LVST935WW01	1010lm	95	3500K
611864	ILS10LVST940NW01	1020lm	95	4000K
611865	ILS10LVST950DL01	1040lm	95	5000K


DIMENSIONS





611859 - 611860 - 611861 - 611862 - 611863 - 611864 - 611865


ACCESSORIES LED FLEXIBLE LINEAR LIGHT CONNECTOR AVAILABLE AS AN ACCESSORY


Code No.	Model No.	Power	Input	Output	Frequency	Dimensions
611463	ILSLV2PC01					
611465	ILSLV2PC02					L=150mm
611468	ILSLV2PC04					
611466	ILSLV2PC03					L=150mm
611944	ILSLVRFDIMMCD01	144W	DC24V	DC24V	433.92Hz	40x85x6mm
611948	ILS75W24VCG01	75W	AC220-240V	DC24V	50/60Hz	78x110x36mm
611949	ILS100W24VCG01	100W	AC220-240V	DC24V	50/60Hz	98x130x41mm
611950	ILS150W24VCG01	150W	AC220-240V	DC24V	50/60Hz	98x160x50mm





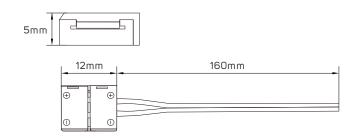





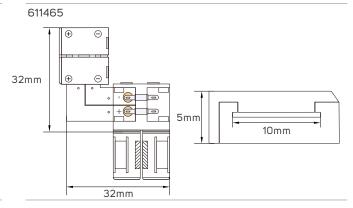













APPLICATION PICTURE

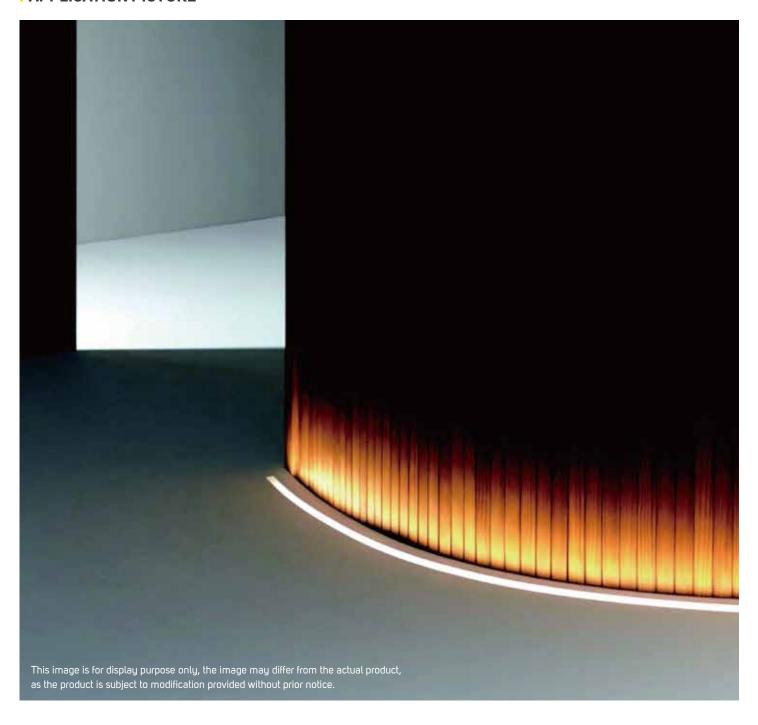

LED FLEXIBLE LINEAR LIGHT

BEYOND LIGHT..
TO THE LAST DETAILS!

