



The most cost-effective outdoor spot light with better efficient and performance

LED FLOOD LUMINAIRE SERIES

PRODUCT INFORMATION

- Designed to produce both general and accent lighting while concealing the body of the device.
- Extreme reliability and high level of resistance to adverse weather conditions.
- ILLUS LED FLOOD Luminaire gives the customer the flexibility to choose between 33 models based on their specific need with lumen package from 960 lm to 30000 lm.

BENEFITS

- In stylish and very compact design.
- Effortless and flexible installation.
- Customizing for you.

FEATURES

- Operating voltage AC185 – 265V.
- Non – dimmable.



**BEYOND LIGHT..
TO THE LAST DETAILS!**

AREAS OF APPLICATION



Industrial



Shopping Center



Garden



Commercial



Educational Center



TECHNICAL OPERATING & ELECTRICAL DATA

Body Color	Grey
Body Material	Aluminum
IP Rating	IP65
CRI	80
Lumen	from 4000-16000lm/M+/-10%
Voltage	AC185-265V
Frequency	50/60Hz
Mounting Type	Surface-mounted
Beam Angle	120°
Ambient Temperature	-20°C~50°C
Dimming	Non Dimmable
Lamp Type	Direct
Fixed or Adjustable	Adjustable
Life Span	35000h

SPECIFICATIONS

Code No.	Model No.	Power	Lumen	Efficacy	CCT
611667	ILS50FL830WW02	50W	4000lm	80lm/w	3000K
611668	ILS50FL840WW02	50W	4000lm	80lm/w	4000K
611669	ILS50FL857WW02	50W	4000lm	80lm/w	5700K
611670	ILS70FL830WW01	70W	5600lm	80lm/w	3000K
611671	ILS70FL840WW01	70W	5600lm	80lm/w	4000K
611672	ILS70FL857WW01	70W	5600lm	80lm/w	5700K
611673	ILS100FL830WW03	100W	8000lm	80lm/w	3000K
611674	ILS100FL840WW03	100W	8000lm	80lm/w	4000K
611675	ILS100FL857WW03	100W	8000lm	80lm/w	5700K
611676	ILS150FL830WW03	150W	12000lm	80lm/w	3000K
611677	ILS150FL840WW03	150W	12000lm	80lm/w	4000K
611678	ILS150FL857WW03	150W	12000lm	80lm/w	5700K
611679	ILS200FL830WW02	200W	16000lm	80lm/w	3000K
611680	ILS200FL840WW02	200W	16000lm	80lm/w	4000K
611681	ILS200FL857WW02	200W	16000lm	80lm/w	5700K


TECHNICAL OPERATING & ELECTRICAL DATA

Body Color	Grey
IP Rating	IP65
CRI	80
Lumen	from 960-30000lm/M+/-10%
Voltage	AC185-265V
Frequency	50/60Hz
Mounting Type	Surface-mounted
Beam Angle	110°
Ambient Temperature	-20°C~35°C
Dimming	Non Dimmable
Lamp Type	Direct
Fixed or Adjustable	Adjustable
Life Span	30000h


SPECIFICATIONS

Code No.	Model No.	Power	Lumen	Efficacy	CCT
612391	ILS10FL830WW01	10W	960lm	96lm/W	3000K
612392	ILS10FL840NW01	10W	990lm	99lm/W	4000K
612393	ILS10FL857DL01	10W	1000lm	100lm/W	5700K
612394	ILS20FL830WW01	20W	1900lm	95lm/W	3000K
612395	ILS20FL840NW01	20W	1980lm	99lm/W	4000K
612396	ILS20FL857DL01	20W	2000lm	100lm/W	5700K
612397	ILS30FL830WW01	30W	2700lm	90lm/W	3000K
612398	ILS30FL840NW01	30W	3000lm	100lm/W	4000K
612399	ILS30FL857DL01	30W	3500lm	116.67lm/W	5700K
612400	ILS50FL830WW01	50W	4850lm	97lm/W	3000K
612401	ILS50FL840NW01	50W	4950lm	99lm/W	4000K
612402	ILS50FL857DL01	50W	5000lm	100lm/W	5700K
612403	ILS100FL830WW02	100W	9400lm	94lm/W	3000K
612404	ILS100FL840NW02	100W	9600lm	96lm/W	4000K
612405	ILS100FL857DL02	100W	9700lm	97lm/W	5700K
612412	ILS300FL830WW01	300W	28500lm	95lm/W	3000K
612413	ILS300FL840NW01	300W	29500lm	98.33lm/W	4000K
612414	ILS300FL857DL01	300W	30000lm	100lm/W	5700K

DIMENSIONS

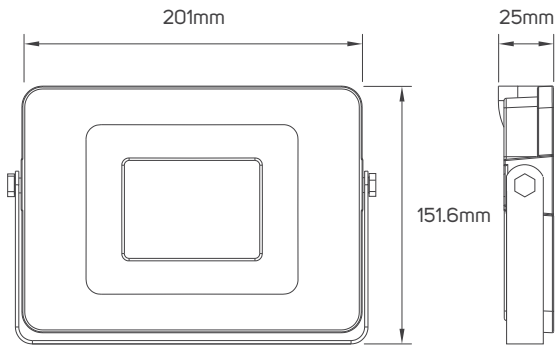

611667 - 611668 - 611669

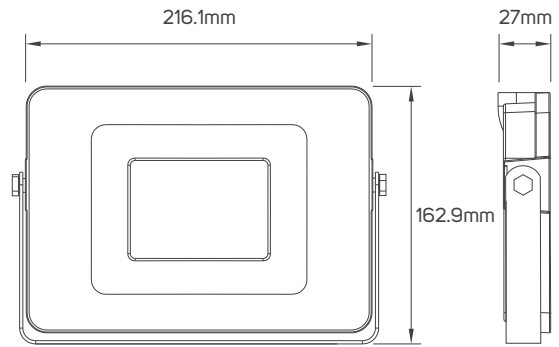


611670 - 611671 - 611672




611667 - 611668 - 611669



611670 - 611671 - 611672

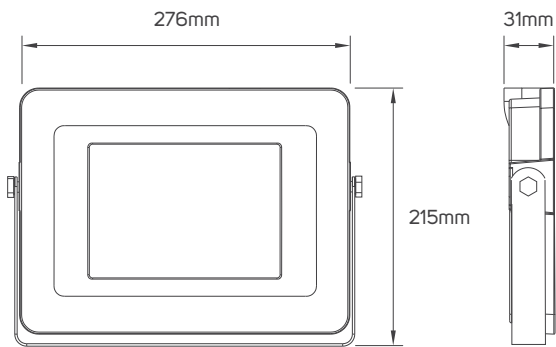

611673 - 611674 - 611675

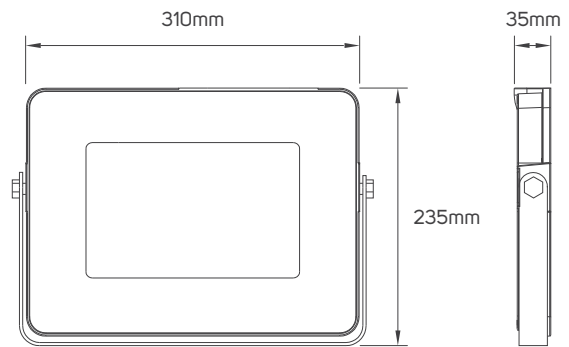

611676 - 611677 - 611678




611673 - 611674 - 611675



611676 - 611677 - 611678


I DIMENSIONS

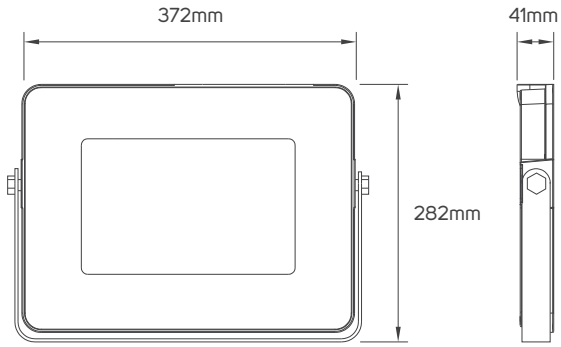

611679 - 611680 - 611681



611679 - 611680 - 611681

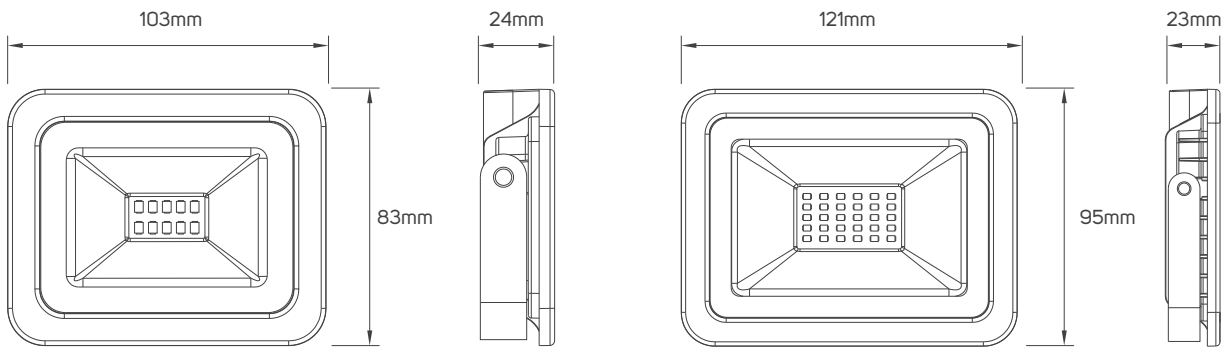

612391 - 612392 - 612393


612394 - 612395 - 612396



612391 - 612392 - 612393

612394 - 612395 - 612396


I DIMENSIONS

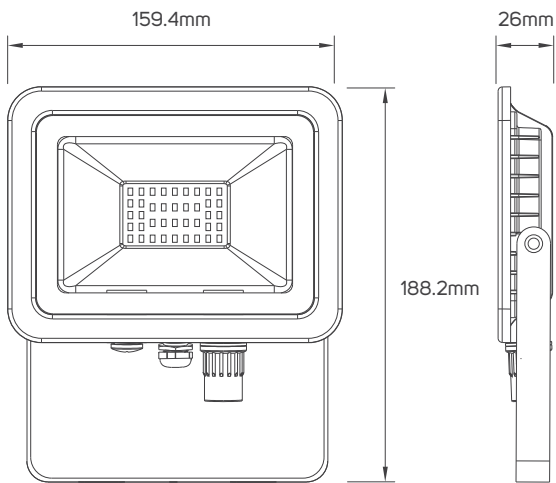

612397 - 612398 - 612399




612397 - 612398 - 612399

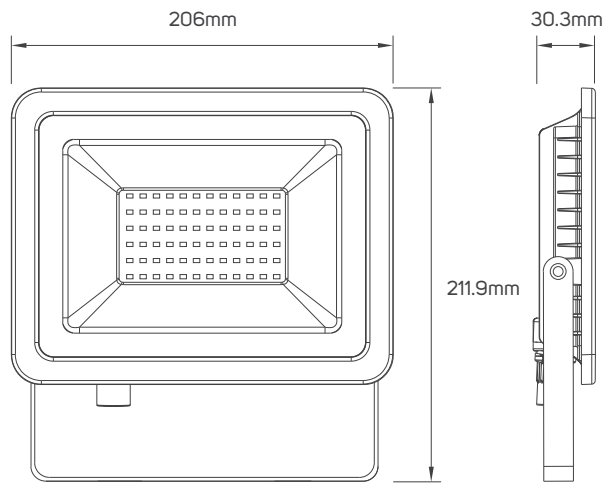

612400 - 612401 - 612402




612400 - 612401 - 612402

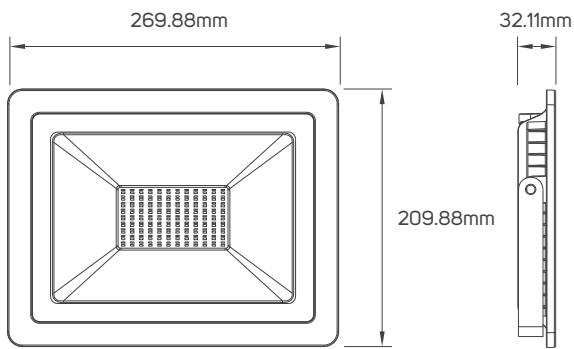

612403 - 612404 - 612405



612403 - 612404 - 612405

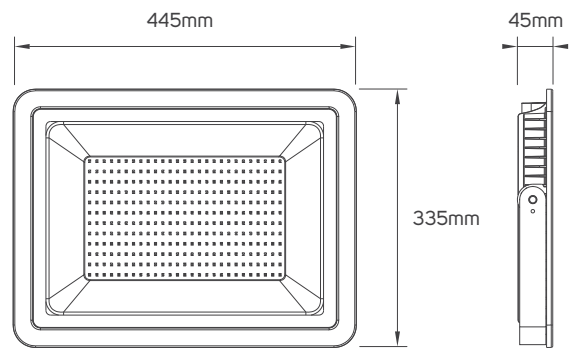

612412 - 612413 - 612414




612412 - 612413 - 612414

ACCESSORIES

Code No.	Model No.	IP Rating	Voltage	Frequency	Body Color	Body Material
612512	ILSOFLSN01	IP65	AC220-240V	50/60Hz	black	aluminum+plastic

ACCESSORIES DIMENSIONS

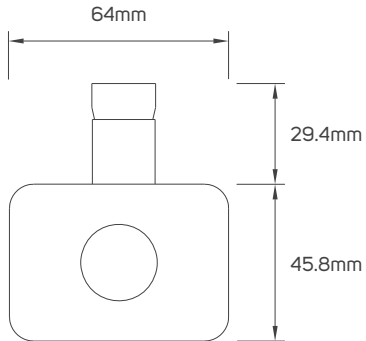

612512

APPLICATION PICTURE



This image is for display purpose only, the image may differ from the actual product, as the product is subject to modification provided without prior notice.

LED FLOOD LUMINAIRE SERIES

**BEYOND LIGHT..
TO THE LAST DETAILS!**



Carrer de la Vall de la Ballestera, 64, 46015 València, Valencia, España, Tel: +34619824456

www.illusillumination.com

illus illumination reserve the right to make dimensional, design and technical alternations without prior notice. illus illumination endeavor to ensure that any advice, recommendation or information it provides in product literature is accurate and correct. However due to the fact that illus do not have direct control on where and how the products are installed, illus illumination cannot accept any liability either direct or indirect arising from the use of illus products whether or not in accordance with any advice, specification, recommendation or information provided by illus illumination or its distributors.