

Make your boundaries Stand Out

LED RECESSED LUMINAIRE (Wall) SERIES

PRODUCT INFORMATION

- Surface mounted, exterior-rated and compact sized architectural LED edge lighting luminaire that is designed for façade and outdoor decorative lighting applications.
- Ideal for edges lighting on windows and doors inner frames, building façades, landmarks and monuments.
- ILLUS LED RECESSED Luminaire (WALL) gives the customer the flexibility to choose between 6 models based on their specific need with lumen package from 60 lm to 150 lm.

BENEFITS

- Unique optical distribution to highlight the inner frames or outer edges of windows, balconies or doors.
- Compact size.
- Light weight.

FEATURES

- High CRI>80.
- Operating voltage AC100-240V.
- Non dimmable.



AREAS OF APPLICATION



Industrial



Shopping Center



Garden





Educational Center




I TECHNICAL OPERATING & ELECTRICAL DATA

Frame Material	Powder Coating
IP Rating	IP65
CRI	80
Lumen	60-150lm/M+/-10%
ССТ	3000K
Voltage	AC100-240V
Frequency	50/60Hz
Dimming	Non Dimmable
Mounting Type	Recessed in Wall
Fixed or Adjustable	Fixed
Life Span	30000h


SPECIFICATIONS

Code No.	Model No.	Power	Lumen	Efficacy	Body color	Body Material	Beam Angle
521227	ILS5WLWW01	5W	80lm	15lm/W	dark grey	aluminum+ADC12	110°
521228	ILS5WLWW02	5W	105lm	21lm/W	dark grey	aluminum+ADC12	110°
521238	ILS2WLWW01	2W	60lm	30lm/W	black	aluminum+glass	37°
521248	ILS5WLWW03	5W	150lm	30lm/W	dark grey	aluminum+ADC12	48°
521249	ILS5WLWW04	5W	150lm	30lm/W	dark grey	aluminum+ADC12	51°
521252	ILS2WLWW02	2W	60lm	30lm/W	matt white	aluminum+glass	37°


DIMENSIONS

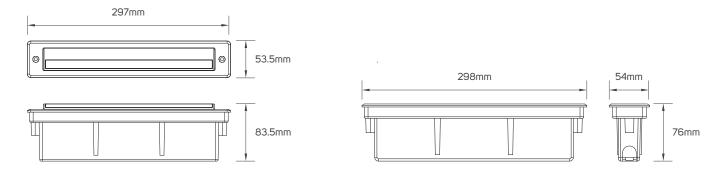


521227 521228

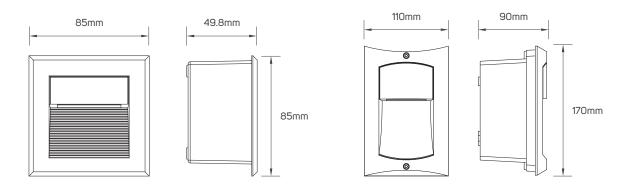

521238 - 521252 521248



APPLICATION PICTURE

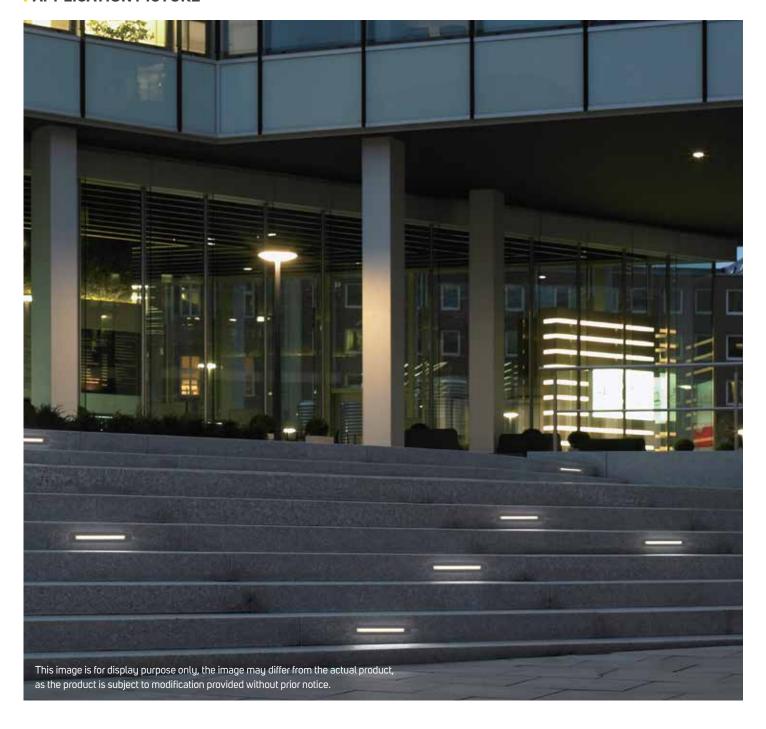

LED RECESSED LUMINAIRE (Wall) SERIES

BEYOND LIGHT..
TO THE LAST DETAILS!

