

LED PRO

**Simple and flexible solution to design modern light lines in professional and retail spaces**

## **LED RECESSED LINEAR LUMINAIRE SERIES (CORNER)**

### **PRODUCT INFORMATION**

- Modern looking, neat luminaire offering comfortable, good quality lighting and can also work as a design element.
- Ideal lighting in the non-working areas of professional spaces such as offices, educational institutes, and also the welcoming areas and entrances of retail spaces.
- ILLUS LED RECESSED LINEAR Luminaire (CORNER) gives the customer the flexibility to choose between 9 models based on their specific need with lumen package from 1570 lm to 3250 lm.

### **BENEFITS**

- Clean and uniform light.
- Multiple application use.
- Easy to install and maintain.

### **FEATURES**

- High CRI>80.
- Efficacy up to 114lm/w.
- Life span 30,000 hrs.
- Operating voltage AC220 – 240V.
- Non – dimmable.



**BEYOND LIGHT..  
TO THE LAST DETAILS!**

## AREAS OF APPLICATION



Hospitality




Shopping Center



Commercial



Educational Center




## TECHNICAL OPERATING & ELECTRICAL DATA

Body Color	Matt White
Body Material	Aluminum
IP Rating	IP20
Lumen	1570-3250lm/M+/-10%
Voltage	AC220-240V
Frequency	50/60Hz
Mounting Type	Recessed
Beam Angle	110°
Dimming	Non Dimmable
Lamp Type	Indirect
Fixed or Adjustable	Fixed
Life Span	30000hrs

## SPECIFICATIONS

Code No.	Model No.	Power	Lumen	Efficacy	CCT
671095	ILS14.5RLLT830WW01	14.5W	1570lm	108.28lm/W	3000K
671096	ILS14.5RLLT840NW01	14.5W	1600lm	110.34lm/W	4000K
671097	ILS14.5RLLT850DL01	14.5W	1650lm	113.79lm/W	5000K

## DIMENSIONS

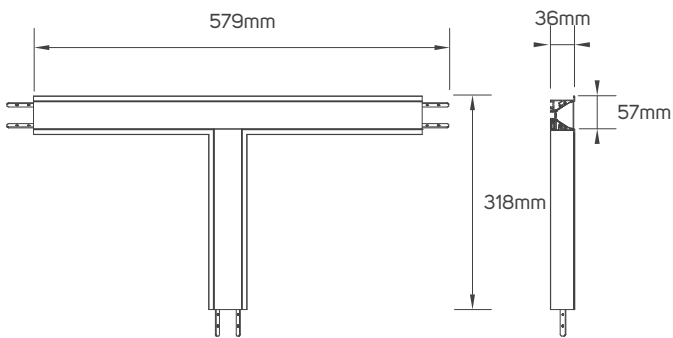

671095 - 671096 - 671097

## ACCESSORIES

Code No.	Model No.	Body Color	Body Material
671113	ILSRLLC01	chrome	iron
671116	ILSRLLFD01	white	flexible PC

## ACCESSORIES DIMENSIONS




671116 - Diffuser

671113 - Connector

## SPECIFICATIONS

Code No.	Model No.	Power	Lumen	Efficacy	CCT
671098	ILS21.5RLLT830WW01	21.5W	2250lm	104.65lm/W	3000K
671099	ILS21.5RLLT840NW01	21.5W	2350lm	109.30lm/W	4000K
671100	ILS21.5RLLT850DL01	21.5W	2450lm	113.95lm/W	5000K

## DIMENSIONS


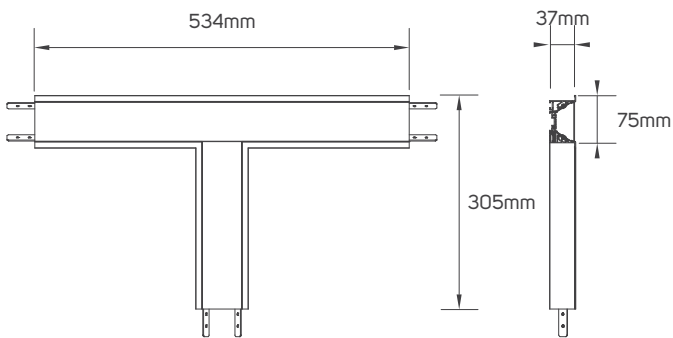


671098 - 671099 - 671100

## ACCESSORIES

Code No.	Model No.	Body Color	Body Material
671114	ILSRLLC02	chrome	iron
671117	ILSRLLFD02	white	flexible PC

## ACCESSORIES DIMENSIONS

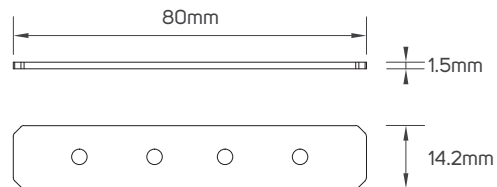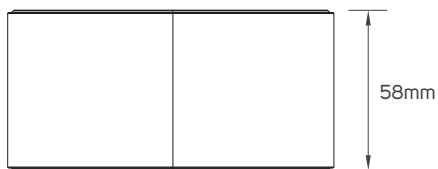


671117 - Diffuser

671114 - Connector

## SPECIFICATIONS

Code No.	Model No.	Power	Lumen	Efficacy	CCT
671101	ILS3ORLLT830WW01	30W	3150lm	105lm/W	3000K
671102	ILS3ORLLT840NW01	30W	3200lm	106.67lm/W	4000K
671103	ILS3ORLLT850DL01	30W	3250lm	108.33lm/W	5000K

## DIMENSIONS

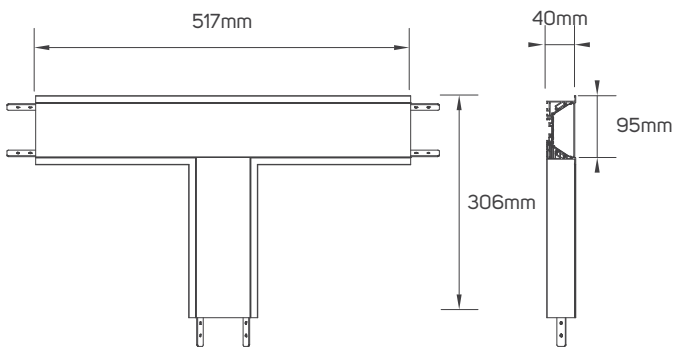

671101 - 671102 - 671103

## ACCESSORIES

Code No.	Model No.	Body Color	Body Material
671115	ILSRLLC03	chrome	iron
671118	ILSRLLFD03	white	flexible PC

## ACCESSORIES DIMENSIONS



671118 - Diffuser

671115 - Connector

## APPLICATION PICTURE



This image is for display purpose only, the image may differ from the actual product, as the product is subject to modification provided without prior notice.

## LED RECESSED LINEAR LUMINAIRE SERIES (CORNER)

**BEYOND LIGHT..  
TO THE LAST DETAILS!**



Carrer de la Vall de la Ballestera, 64, 46015 València, Valencia, España, Tel: +34619824456

[www.illusillumination.com](http://www.illusillumination.com)

illus illumination reserve the right to make dimensional, design and technical alternations without prior notice. illus illumination endeavor to ensure that any advice, recommendation or information it provides in product literature is accurate and correct. However due to the fact that illus do not have direct control on where and how the products are installed, illus illumination cannot accept any liability either direct or indirect arising from the use of illus products whether or not in accordance with any advice, specification, recommendation or information provided by illus illumination or its distributors.