

Simple and flexible solution to design modern light lines in professional and retail spaces

LED RECESSED LINEAR LUMINAIRE SERIES (CORNER)

PRODUCT INFORMATION

- Modern looking, neat luminaire offering comfortable, good quality lighting and can also work as a design element.
- Ideal lighting in the non-working areas of professional spaces such as offices, educational institutes, and also the welcoming areas and entrances of retail spaces.
- ILLUS LED RECESSED LINEAR Luminaire (CORNER) gives the customer the flexibility to choose between 9 models based on their specific need with lumen package from 1060 lm to 2250 lm.

BENEFITS

- Clean and uniform light.
- Multiple application use.
- Easy to install and maintain.

FEATURES

- High CRI>80.
- Efficacy up to 114lm/w.
- Life span 30,000 hrs.
- Operating voltage AC220 240V.
- Non dimmable.



AREAS OF APPLICATION





Hospitality

Shopping Center





Commercial

Educational Center




I TECHNICAL OPERATING & ELECTRICAL DATA

Body Color	Matt White
Body Material	Aluminum
IP Rating	IP20
Lumen	1060-2250lm/M+/-10%
Voltage	AC220-240V
Frequency	50/60Hz
Mounting Type	Recessed
Beam Angle	140°
Dimming	Non Dimmable
Lamp Type	Indirect
Fixed or Adjustable	Fixed
Life Span	30000hrs

SPECIFICATIONS

Code No.	Model No.	Power	Lumen	Efficacy	CCT
671086	ILS11RLL0830WW01	11W	1060lm	96.36lm/W	3000K
671087	ILS11RLL0840NW01	11W	1090lm	99.09lm/W	4000K
671088	ILS11RLL0850DL01	11W	1110lm	100.91lm/W	5000K

I DIMENSIONS




671086 - 671087 - 671088

ACCESSORIES

Code No.	Model No.	Body Color	Body Material
671113	ILSRLLC01	chrome	iron
671116	ILSRLLFD01	white	flexible PC

ACCESSORIES DIMENSIONS




671116 - Diffuser 671113 - Connector

SPECIFICATIONS

Code No.	Model No.	Power	Lumen	Efficacy	CCT
671089	ILS14.5RLL0830WW01	14.5W	1570lm	108.28lm/W	3000K
671090	ILS14.5RLL0840NW01	14.5W	1600lm	110.34lm/W	4000K
671091	ILS14.5RLL0850DL01	14.5W	1650lm	113.79lm/W	5000K

I DIMENSIONS





671089 - 671090 - 671091

ACCESSORIES

Code No.	Model No.	Body Color	Body Material
671114	ILSRLLC02	chrome	iron
671117	ILSRLLFD02	white	flexible PC

ACCESSORIES DIMENSIONS






671117 - Diffuser 671114 - Connector

SPECIFICATIONS

Code No.	Model No.	Power	Lumen	Efficacy	CCT
671092	ILS20.5RLL0830WW01	20.5W	2100lm	102.44lm/W	3000K
671093	ILS20.5RLL0840NW01	20.5W	2200lm	107.32lm/W	4000K
671094	ILS20.5RLL0850DL01	20.5W	2250lm	109.76lm/W	5000K

I DIMENSIONS




671092 - 671093 - 671094

ACCESSORIES


Code No.	Model No.	Body Color	Body Material
671115	ILSRLLC03	chrome	iron
671118	ILSRLLFD03	white	flexible PC


ACCESSORIES DIMENSIONS

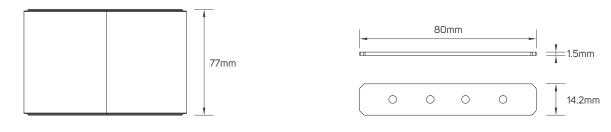

671118 - Diffuser 671115 - Connector

APPLICATION PICTURE



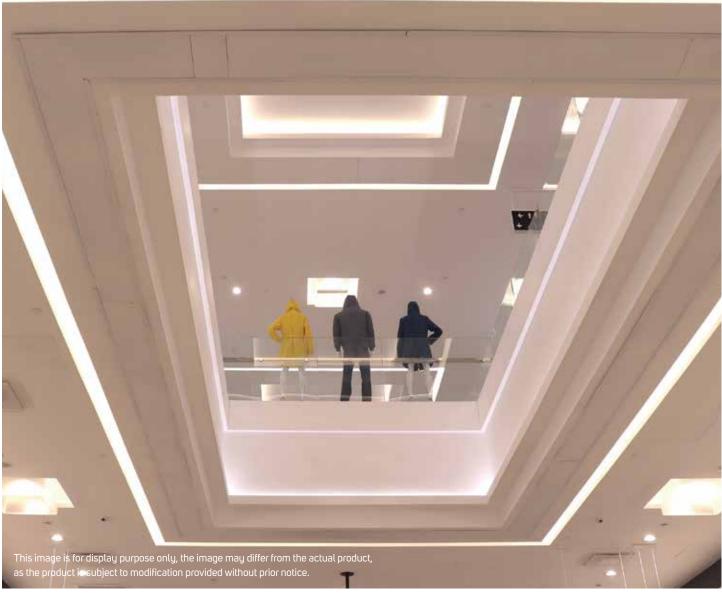

LED RECESSED LINEAR LUMINAIRE SERIES (CORNER)

BEYOND LIGHT..
TO THE LAST DETAILS!

