



LED PRO

Simple and flexible solution to design modern light lines in professional and retail spaces

LED RECESSED LINEAR LUMINAIRE SERIES (CORNER)

PRODUCT INFORMATION

- Modern looking, neat luminaire offering comfortable, good quality lighting and can also work as a design element.
- Ideal lighting in the non-working areas of professional spaces such as offices, educational institutes, and also the welcoming areas and entrances of retail spaces.
- ILLUS LED RECESSED LINEAR Luminaire (CORNER) gives the customer the flexibility to choose between 9 models based on their specific need with lumen package from 1000 lm to 2100 lm.

BENEFITS

- Clean and uniform light.
- Multiple application use.
- Easy to install and maintain.

FEATURES

- High CRI>80.
- Efficacy up to 105lm/w.
- Life span 30,000 hrs.
- Operating voltage AC220 – 240V.
- Non – dimmable.



**BEYOND LIGHT..
TO THE LAST DETAILS!**

AREAS OF APPLICATION



Hospitality



Shopping Center



Commercial



Educational Center




TECHNICAL OPERATING & ELECTRICAL DATA

Body Color	Matt White
Body Material	Aluminum
IP Rating	IP20
Lumen	1000-2100lm/M+/-10%
Voltage	AC220-240V
Frequency	50/60Hz
Mounting Type	Recessed
Beam Angle	110°
Dimming	Non Dimmable
Lamp Type	Indirect
Fixed or Adjustable	Fixed
Life Span	30000hrs

SPECIFICATIONS

Code No.	Model No.	Power	Lumen	Efficacy	CCT
671077	ILS10.5RLLI830WW01	10.5W	1000lm	95.24lm/W	3000K
671078	ILS10.5RLLI840NW01	10.5W	1020lm	97.14lm/W	4000K
671079	ILS10.5RLLI850DL01	10.5W	1040lm	99.05lm/W	5000K

DIMENSIONS

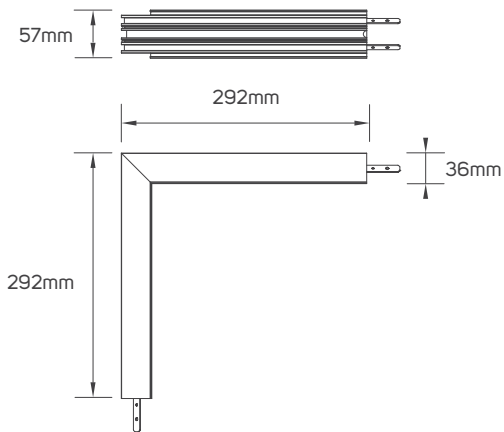


671077 - 671078 - 671079

ACCESSORIES

Code No.	Model No.	Body Color	Body Material
671113	ILSRLLC01	chrome	iron
671116	ILSRLLFD01	white	flexible PC

ACCESSORIES DIMENSIONS

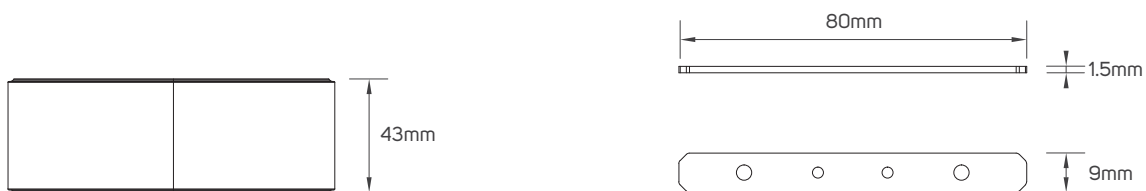


671116 - Diffuser

671113 - Connector

SPECIFICATIONS

Code No.	Model No.	Power	Lumen	Efficacy	CCT
671080	ILS14.5RLLI830WW01	14.5W	1350lm	93.10lm/W	3000K
671081	ILS14.5RLLI840NW01	14.5W	1470lm	101.38lm/W	4000K
671082	ILS14.5RLLI850DL01	14.5W	1500lm	103.45lm/W	5000K

DIMENSIONS


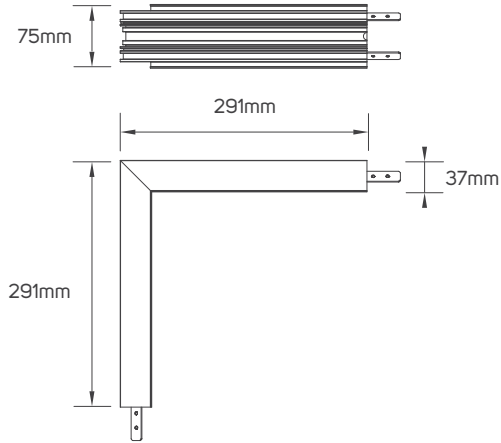


671080 - 671081 - 671082

ACCESSORIES

Code No.	Model No.	Body Color	Body Material
671114	ILSRLLC02	chrome	iron
671117	ILSRLLFD02	white	flexible PC

ACCESSORIES DIMENSIONS

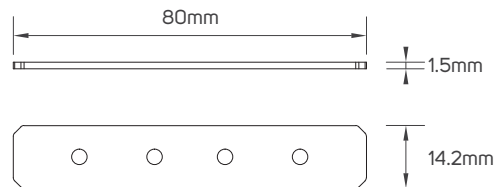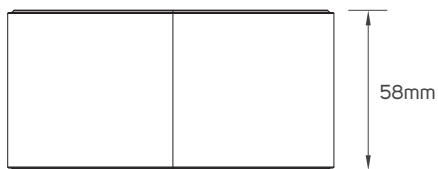


671117 - Diffuser

671114 - Connector

SPECIFICATIONS

Code No.	Model No.	Power	Lumen	Efficacy	CCT
671083	ILS20RLLI830WW01	20W	1980lm	99lm/W	3000K
671084	ILS20RLLI840NW01	20W	2040lm	102lm/W	4000K
671085	ILS20RLLI850DL01	20W	2100lm	105lm/W	5000K

DIMENSIONS

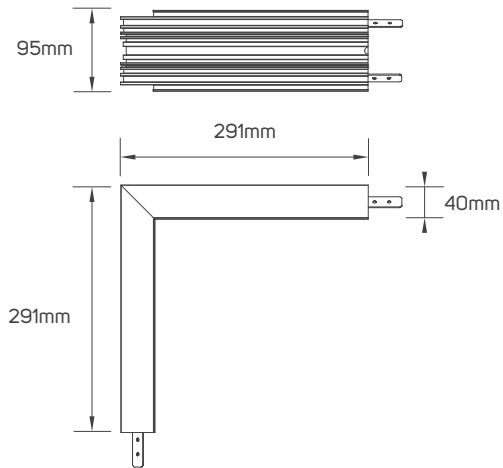

671083 - 671084 - 671085

ACCESSORIES

Code No.	Model No.	Body Color	Body Material
671115	ILSRLLC03	chrome	iron
671118	ILSRLLFD03	white	flexible PC

ACCESSORIES DIMENSIONS



671118 - Diffuser

671115 - Connector

APPLICATION PICTURE



This image is for display purpose only, the image may differ from the actual product, as the product is subject to modification provided without prior notice.

LED RECESSED LINEAR LUMINAIRE SERIES (CORNER)

**BEYOND LIGHT..
TO THE LAST DETAILS!**



Carrer de la Vall de la Ballestera, 64, 46015 València, Valencia, España, Tel: +34619824456

www.illusillumination.com

illus illumination reserve the right to make dimensional, design and technical alternations without prior notice. illus illumination endeavor to ensure that any advice, recommendation or information it provides in product literature is accurate and correct. However due to the fact that illus do not have direct control on where and how the products are installed, illus illumination cannot accept any liability either direct or indirect arising from the use of illus products whether or not in accordance with any advice, specification, recommendation or information provided by illus illumination or its distributors.