



LED PRO

Simple and flexible solution to design modern light lines in professional and retail spaces

LED RECESSED LINEAR LUMINAIRE SERIES (CORNER)

PRODUCT INFORMATION

- Modern looking, neat luminaire offering comfortable, good quality lighting and can also work as a design element.
- Ideal lighting in the non-working areas of professional spaces such as offices, educational institutes, and also the welcoming areas and entrances of retail spaces.
- ILLUS LED RECESSED LINEAR Luminaire (CORNER) gives the customer the flexibility to choose between 9 models based on their specific need with lumen package from 1070 lm to 2300 lm.

BENEFITS

- Clean and uniform light.
- Multiple application use.
- Easy to install and maintain.

FEATURES

- High CRI>80.
- Efficacy up to 115lm/w.
- Life span 30,000 hrs.
- Operating voltage AC220 – 240V.
- Non – dimmable.



**BEYOND LIGHT..
TO THE LAST DETAILS!**

AREAS OF APPLICATION



Hospitality



Shopping Center



Commercial



Educational Center




TECHNICAL OPERATING & ELECTRICAL DATA

Body Color	Matt White
Body Material	Aluminum
IP Rating	IP20
Lumen	1070-2300lm/M+/-10%
Voltage	AC220-240V
Frequency	50/60Hz
Mounting Type	Recessed
Dimming	Non-Dimmable
Lamp Type	Indirect
Fixed or Adjustable	Fixed
Life Span	30000hrs

SPECIFICATIONS

Code No.	Model No.	Power	Lumen	Efficacy	CCT	Beam Angle
671068	ILS10.5RLLU830WW01	10.5W	1070lm	101.9lm/W	3000K	110°
671069	ILS10.5RLLU840NW01	10.5W	1100lm	104.76lm/W	4000K	110°
671070	ILS10.5RLLU850DL01	10.5W	1150lm	109.52lm/W	5000K	110°

DIMENSIONS

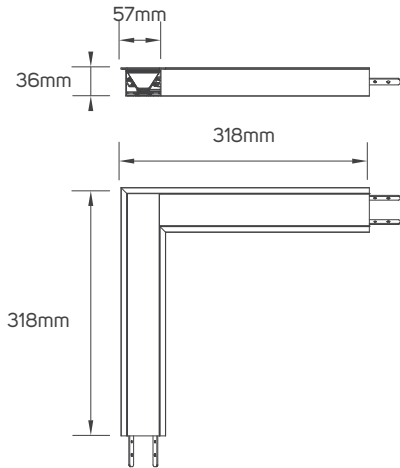

671068 - 671069 - 671070

ACCESSORIES

Code No.	Model No.	Body Color	Body Material
671113	ILSRLLC01	chrome	iron
671116	ILSRLLFD01	white	flexible PC

ACCESSORIES DIMENSIONS




671116 - Diffuser

671113 - Connector

SPECIFICATIONS

Code No.	Model No.	Power	Lumen	Efficacy	CCT	Beam Angle
671071	ILS14RLLU830WW01	14W	1500lm	107.14lm/W	3000K	115°
671072	ILS14RLLU840NW01	14W	1570lm	112.14lm/W	4000K	115°
671073	ILS14RLLU850DL01	14W	1600lm	114.29lm/W	5000K	115°

DIMENSIONS


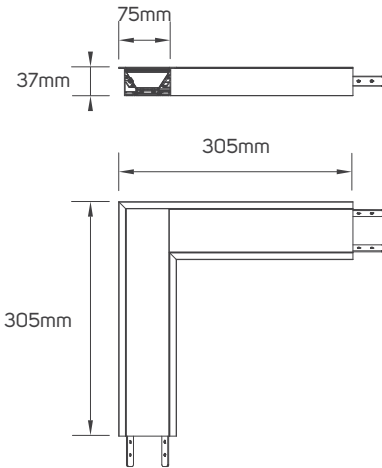


671071 - 671072 - 671073

ACCESSORIES

Code No.	Model No.	Body Color	Body Material
671114	ILSRLLC02	chrome	iron
671117	ILSRLLFD02	white	flexible PC

ACCESSORIES DIMENSIONS

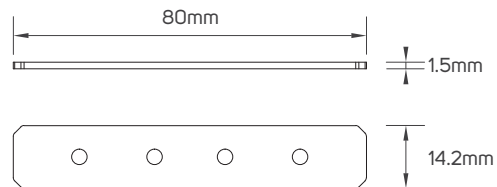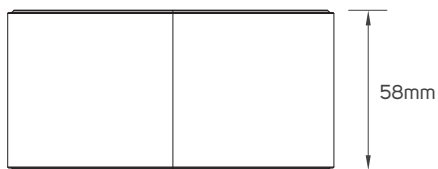


671117 - Diffuser

671114 - Connector

SPECIFICATIONS

Code No.	Model No.	Power	Lumen	Efficacy	CCT	Beam Angle
671074	ILS2ORLLU830WW01	20W	2100lm	105lm/W	3000K	115°
671075	ILS2ORLLU840NW01	20W	2200lm	110lm/W	4000K	115°
671076	ILS2ORLLU850DL01	20W	2300lm	115lm/W	5000K	115°

DIMENSIONS


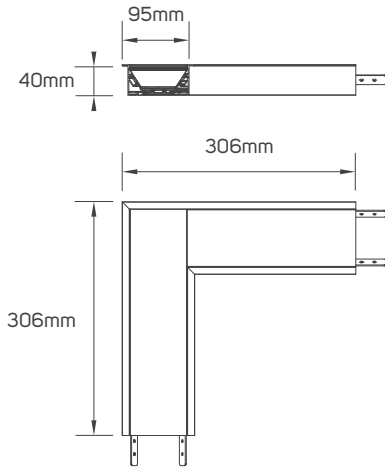


671074 - 671075 - 671076

ACCESSORIES

Code No.	Model No.	Body Color	Body Material
671115	ILSRLLC03	chrome	iron
671118	ILSRLLFD03	white	flexible PC

ACCESSORIES DIMENSIONS

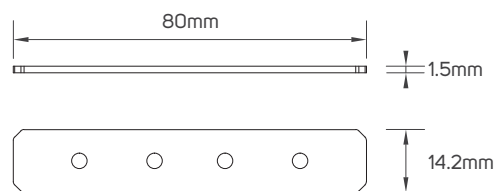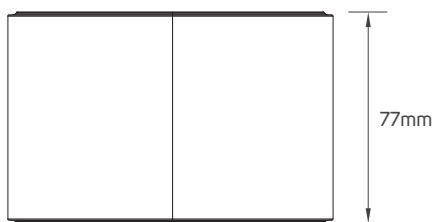

671118 - Diffuser

671115 - Connector

APPLICATION PICTURE



This image is for display purpose only, the image may differ from the actual product, as the product is subject to modification provided without prior notice.

LED RECESSED LINEAR LUMINAIRE SERIES (CORNER)

**BEYOND LIGHT..
TO THE LAST DETAILS!**



Carrer de la Vall de la Ballestera, 64, 46015 València, Valencia, España, Tel: +34619824456

www.illusillumination.com

illus illumination reserve the right to make dimensional, design and technical alternations without prior notice. illus illumination endeavor to ensure that any advice, recommendation or information it provides in product literature is accurate and correct. However due to the fact that illus do not have direct control on where and how the products are installed, illus illumination cannot accept any liability either direct or indirect arising from the use of illus products whether or not in accordance with any advice, specification, recommendation or information provided by illus illumination or its distributors.