

LED PRO

Simple and flexible solution to design modern light lines in professional and retail spaces

LED MAGNETIC TRACK LIGHT SERIES

PRODUCT INFORMATION

- Modern looking, neat luminaire offering comfortable, good quality lighting and can also work as a design element.
- Ideal lighting in the non-working areas of professional spaces such as offices, educational institutes, and also the welcoming areas and entrances of retail spaces.
- ILLUS LED MAGNETIC TRACK Light gives the customer the flexibility to choose between 8 models based on their specific need with lumen package from 570 lm to 1900 lm.

BENEFITS

- Clean and uniform light.
- Multiple application use.
- Easy to install and maintain.

FEATURES

- High CRI>90.
- Efficacy up to 81 lm/w.
- Long life span 30,000 hrs.
- Operating voltage DC48 V.
- Non – dimmable.



**BEYOND LIGHT..
TO THE LAST DETAILS!**

AREAS OF APPLICATION



Hospitality



Shopping Center



Commercial



Educational Center




TECHNICAL OPERATING & ELECTRICAL DATA

IP Ratings	IP20
CRI	90
Body Color	Sandy Black
Body Material	Aluminum
Lumen	from 570 to 1900lm/M+/-10%
Voltage	AC220-240V
Driver Voltage	DC48V
Frequency	50/60Hz
Beam Angle	90°
Mounting Type	Surface Mounted
Dimmable or Not	Non-Dimmable
Directional or Non Directional	Directional
Fixed or Adjustable	Fixed
Life Span	30000h


SPECIFICATIONS

Code No.	Model No.	Power	Lumen	Efficacy	CCT
613643	ILS9W110DMTL930WW03	8W	570lm	71.25lm/W	3000K
613644	ILS9W110DMTL940NW03	8W	600lm	75.00lm/W	4000K
613645	ILS15W110DMTL930WW03	15W	1110lm	74.00lm/W	3000K
613646	ILS15W110DMTL940NW03	15W	1170lm	78.00lm/W	4000K
613647	ILS20W110DMTL930WW03	21W	1600lm	76.19lm/W	3000K
613648	ILS20W110DMTL940NW03	21W	1700lm	80.95lm/W	4000K
613649	ILS24W110DMTL930WW03	24W	1750lm	72.92lm/W	3000K
613650	ILS24W110DMTL940NW03	24W	1900lm	79.17lm/W	4000K


DIMENSIONS

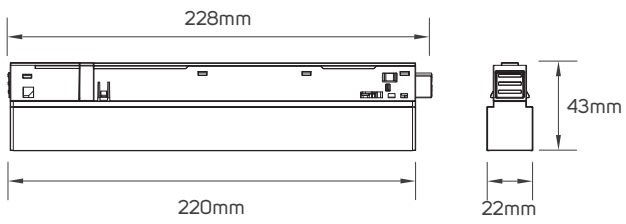


613643 - 613644

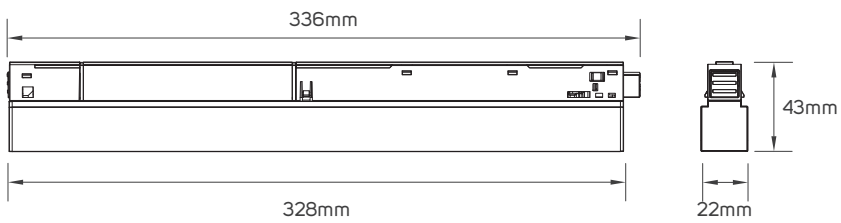

613645 - 613646

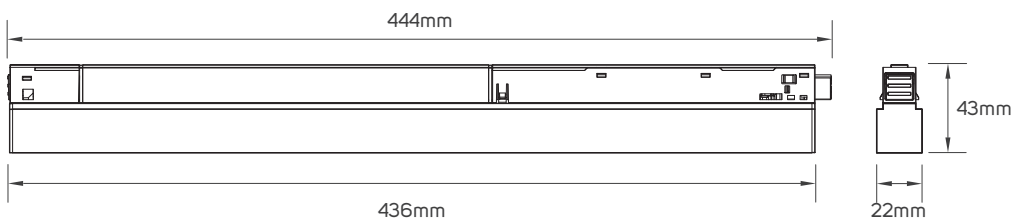

613647 - 613648

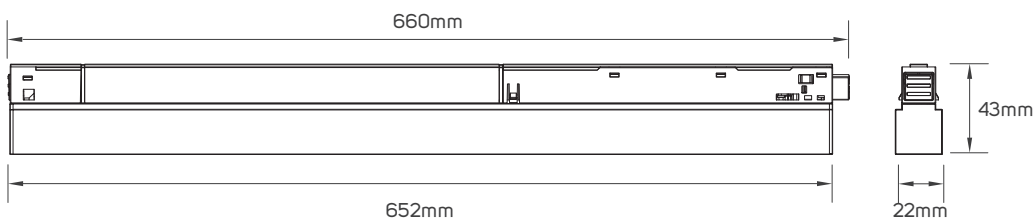


613649 - 613650


ACCESSORIES

Code No.	Model No.	Body Color	Body Material	Power
613669	ILS1M4RTLB01	sandy black	aluminum	/
613670	ILS2M4RTLB01	sandy black	aluminum	/
613671	ILS3M4RTLB01	sandy black	aluminum	/
613672	ILS1M4RTLB02	sandy black	aluminum	/
613673	ILS2M4RTLB02	sandy black	aluminum	/
613674	ILS3M4RTLB02	sandy black	aluminum	/
613675	ILS48VPSTRK01	sandy black	plastic	150W
613676	ILSRATR01	sandy black	aluminum	/
613677	ILSRATR02	sandy black	aluminum	/
613678	ILSSMATR01	sandy black	aluminum	/
613679	ILSSMATR02	sandy black	aluminum	/
613680	ILSCITR01	sandy black	plastic	/
613681	ILSCLTR01	sandy black	plastic	/
613682	ILSPKITTR01	nickle	steel	/
613683	ILSTKITTR01	sliver	aluminum	/


ACCESSORIES DIMENSIONS

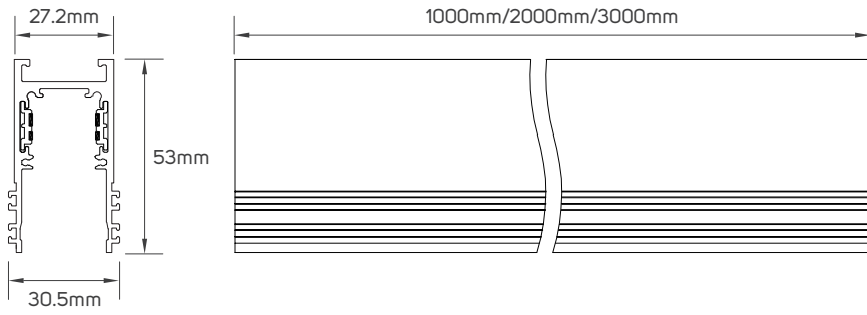

613669 - 613670 - 613671

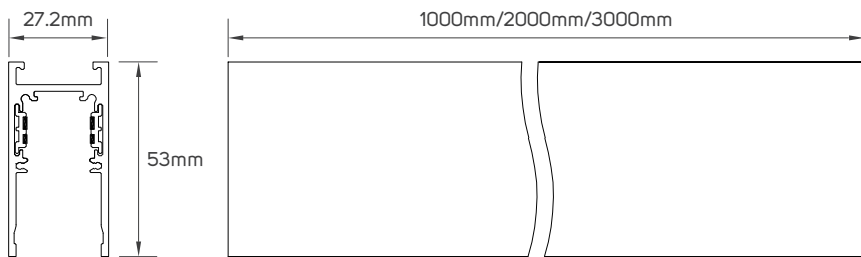





613672- 613673 - 613674

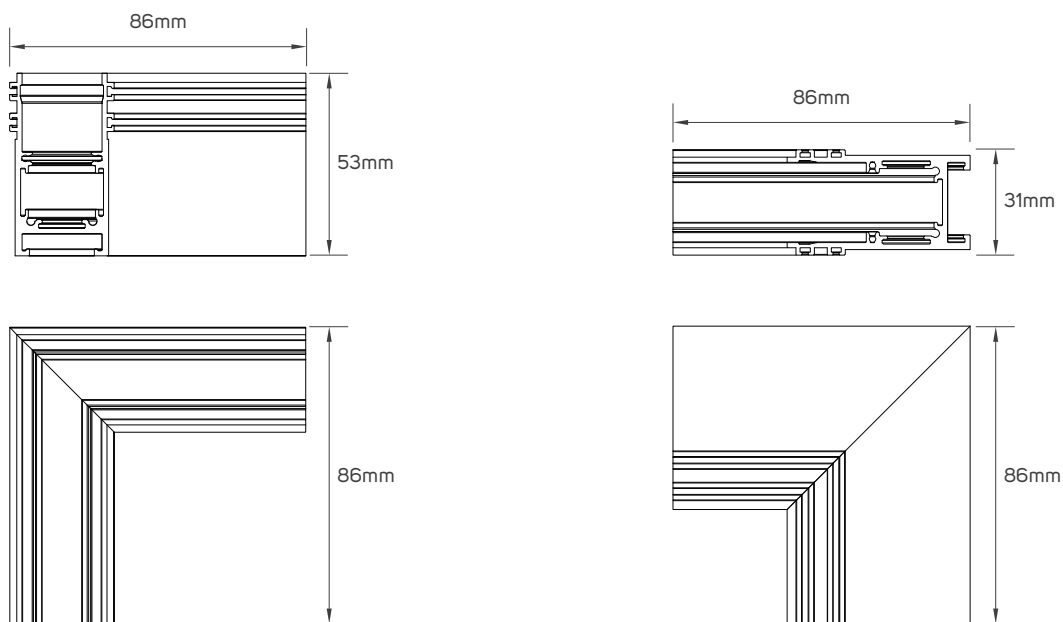

613676


613677

ACCESSORIES DIMENSIONS

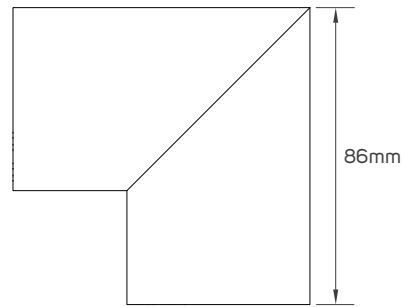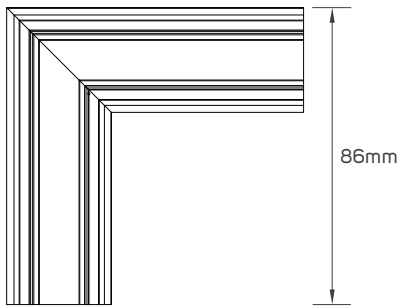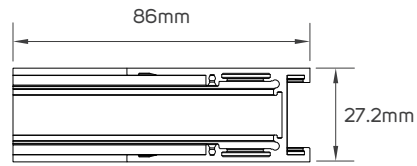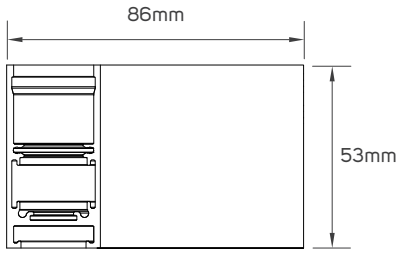


613678


613679

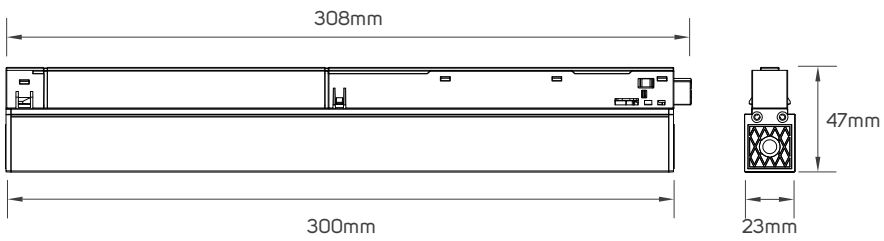

613675

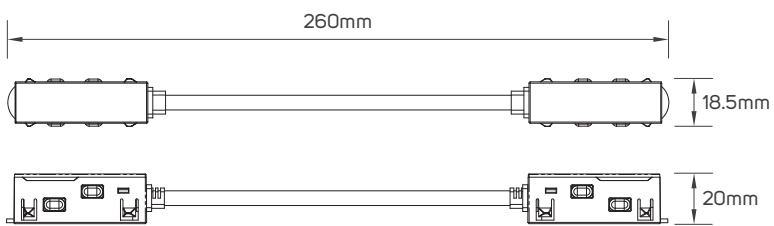


613680



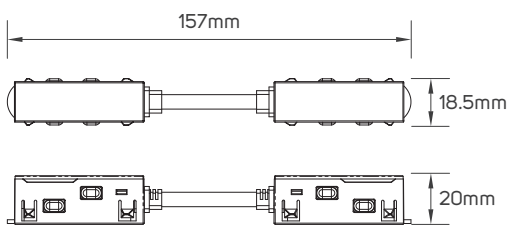


613681

ACCESSORIES DIMENSIONS

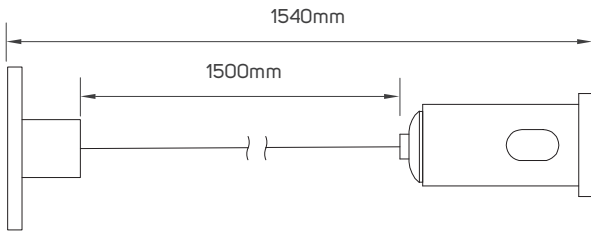

613682

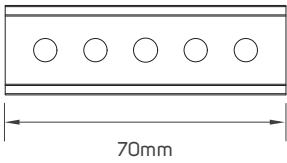

613683

APPLICATION PICTURE



LED MAGNETIC TRACK LIGHT SERIES

**BEYOND LIGHT..
TO THE LAST DETAILS!**



Carrer de la Vall de la Ballestera, 64, 46015 València, Valencia, España, Tel: +34619824456

www.illusillumination.com

illus illumination reserve the right to make dimensional, design and technical alternations without prior notice. illus illumination endeavor to ensure that any advice, recommendation or information it provides in product literature is accurate and correct. However due to the fact that illus do not have direct control on where and how the products are installed, illus illumination cannot accept any liability either direct or indirect arising from the use of illus products whether or not in accordance with any advice, specification, recommendation or information provided by illus illumination or its distributors.