



# For every project, where light really matters

## LED RECESSED CEILING LUMINAIRE SERIES

### PRODUCT INFORMATION

- Suitable for a series of lighting applications in office, retail and general area lighting.
- Available in a wide variety of lumen packs, cut out size and color temperature.
- ILLUS LED RECESSED CEILING Luminaire gives the customer the flexibility to choose between 15 models based on their specific need with lumen package from 510 lm to 3060 lm.

### BENEFITS

- Compact design for better integration with the building.
- Comfortable light with high efficiency.
- Reliable performance for indoor applications.

### FEATURES

- High CRI>90.
- Efficacy up to 91 lm/w.
- Long life span 50,000 hrs.
- Operating voltage AC220 – 240V.
- Non – dimmable.



**BEYOND LIGHT..  
TO THE LAST DETAILS!**

## AREAS OF APPLICATION



Hospitality



Shopping Center



Commercial



Educational Center





## TECHNICAL OPERATING & ELECTRICAL DATA

IP Ratings	IP44
CRI	90
Body Material	Aluminum
Body Color	White
Lumen	from 510 to 3060lm/M+/-10%
Voltage	AC220-240V
Frequency	50/60Hz
Beam Angle	90°
Mounting Type	Recessed on Ceiling
Dimming	Non-Dimmable
Lamp Type	Direct
Fixed or Adjustable	Fixed
Life Span	50000h

## SPECIFICATIONS





Code No.	Model No.	Power	Lumen	Efficacy	CCT
613132	ILS7DL930WW02	7W	510lm	72.86lm/W	3000K
613133	ILS7DL940NW02	7W	520lm	74.29lm/W	4000K
613134	ILS7DL957DL02	7W	540lm	77.14lm/W	5700K
613135	ILS10DL930WW02	10W	820lm	82.00lm/W	3000K
613136	ILS10DL940NW02	10W	840lm	84.00lm/W	4000K
613137	ILS10DL957DL02	10W	870lm	87.00lm/W	5700K
613138	ILS15DL930WW02	15W	1250lm	83.33lm/W	3000K
613139	ILS15DL940NW02	15W	1280lm	85.33lm/W	4000K
613140	ILS15DL957DL02	15W	1320lm	88.00lm/W	5700K
613141	ILS24DL930WW02	23W	2000lm	86.96lm/W	3000K
613142	ILS24DL940NW02	23W	2040lm	88.70lm/W	4000K
613143	ILS24DL957DL02	23W	2100lm	91.30lm/W	5700K
613144	ILS36DL930WW02	35W	2950lm	84.29lm/W	3000K
613145	ILS36DL940NW02	35W	3000lm	85.71lm/W	4000K
613146	ILS36DL957DL02	35W	3060lm	87.43lm/W	5700K

## DIMENSIONS

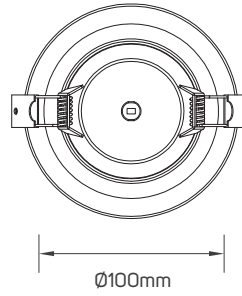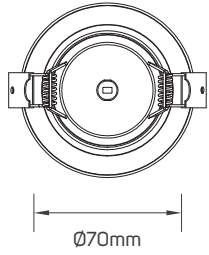



613132 - 613133 - 613134

613135 - 613136 - 613137

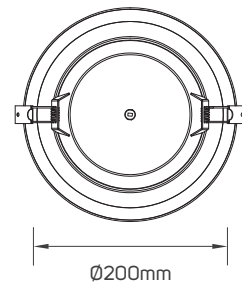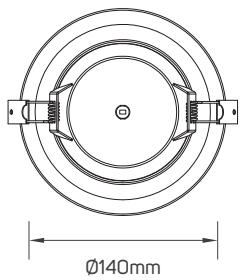

613138 - 613139 - 613140

613141 - 613142 - 613143




613144 - 613145 - 613146

## ACCESSORIES


LED RECESSED CEILING LUMINAIRE DRIVER  
AVAILABLE AS AN ACCESSORY

Code No.	Model No.	Power	Voltage
613147	ILS7WACDLD02	7W	AC220-240V
613148	ILS10WACDLD02	10W	AC220-240V
613149	ILS15WACDLD02	15W	AC220-240V
613150	ILS24WACDLD02	24W	AC220-240V
613151	ILS36WACDLD02	36W	AC220-240V


## ACCESSORIES DIMENSIONS

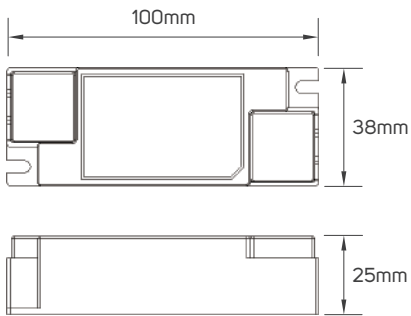

613147

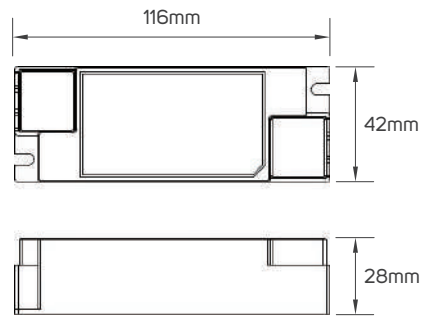

613148 - 613149

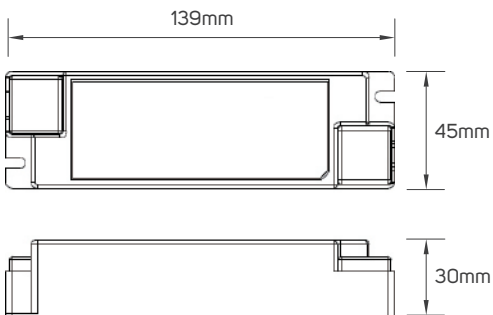

613150 - 613151

## APPLICATION PICTURE



This image is for display purpose only, the image may differ from the actual product, as the product is subject to modification provided without prior notice.

## LED RECESSED CEILING LUMINAIRE SERIES

**BEYOND LIGHT..  
TO THE LAST DETAILS!**

