



## The suitable light for general lighting applications

### LED RECESSED CEILING LUMINAIRE SERIES

#### PRODUCT INFORMATION

- Suitable for a series of lighting applications in office, retail and general area lighting.
- Available in a wide variety of lumen packs, cut out size and color temperature.
- ILLUS LED RECESSED CEILING Luminaire gives the customer the flexibility to choose between 30 models based on their specific need with lumen package from 610 lm to 4500 lm.

#### BENEFITS

- Compact design for better integration with the building.
- Comfortable light with high efficiency.
- Reliable performance for indoor applications.

#### FEATURES

- High CRI>90.
- Efficacy up to 82lm/w.
- Long life span 50,000 hrs.
- Operating voltage AC220 – 240V.
- Non – dimmable.



**BEYOND LIGHT..  
TO THE LAST DETAILS!**

## AREAS OF APPLICATION



Hospitality



Shopping Center



Commercial



Educational Center



## TECHNICAL OPERATING & ELECTRICAL DATA

IP Ratings	IP65
Body Material	Aluminum
Lumen	from 610 to 4500lm/M+/-10%
Voltage	AC220-240V
Frequency	50/60Hz
Mounting Type	Recessed on Ceiling
Dimming	Non-Dimmable
Lamp Type	Direct
Fixed or Adjustable	Fixed
Life Span	50000h

## SPECIFICATIONS

Code No.	Model No.	Body Color	Power	Lumen	Efficacy	CCT	Beam Angle	Cutting Size
613077	ILS9DLO930WW01	white	9W	610lm	67.78lm/w	3000K	24°	Ø70mm
613078	ILS9DLO940NW01	white	9W	640lm	71.11lm/w	4000K	24°	Ø70mm
613079	ILS9DLO950DL01	white	9W	660lm	73.33lm/w	5000K	24°	Ø70mm
613080	ILS9DLO930WW02	black	9W	610lm	67.78lm/w	3000K	24°	Ø70mm
613081	ILS9DLO940NW02	black	9W	640lm	71.11lm/w	4000K	24°	Ø70mm
613082	ILS9DLO950DL02	black	9W	660lm	73.33lm/w	5000K	24°	Ø70mm
613083	ILS15DLO930WW01	white	15W	1120lm	74.67lm/w	3000K	24°	Ø100mm
613084	ILS15DLO940NW01	white	15W	1130lm	75.33lm/w	4000K	24°	Ø100mm
613085	ILS15DLO950DL01	white	15W	1140lm	76lm/w	5000K	24°	Ø100mm
613086	ILS15DLO930WW02	black	15W	1120lm	74.67lm/w	3000K	24°	Ø100mm
613087	ILS15DLO940NW02	black	15W	1130lm	75.33lm/w	4000K	24°	Ø100mm
613088	ILS15DLO950DL02	black	15W	1140lm	76lm/w	5000K	24°	Ø100mm
613089	ILS20DLO930WW02	white	20W	1450lm	72.5lm/w	3000K	36°	Ø140mm
613090	ILS20DLO940NW02	white	20W	1510lm	75.5lm/w	4000K	36°	Ø140mm
613091	ILS20DLO950DL02	white	20W	1550lm	77.5lm/w	5000K	36°	Ø140mm
613092	ILS20DLO930WW01	black	20W	1450lm	72.5lm/w	3000K	36°	Ø140mm
613093	ILS20DLO940NW01	black	20W	1510lm	75.5lm/w	4000K	36°	Ø140mm
613094	ILS20DLO950DL01	black	20W	1550lm	77.5lm/w	5000K	36°	Ø140mm





## SPECIFICATIONS

Code No.	Model No.	Body Color	Power	Lumen	Efficacy	CCT	Beam Angle	Cutting Size
613095	ILS37DLO930WW01	white	37W	2700lm	72.98lm/w	3000K	36°	Ø200mm
613096	ILS37DLO940NW01	white	37W	2900lm	78.38lm/w	4000K	36°	Ø200mm
613097	ILS37DLO950DL01	white	37W	3050lm	82.43lm/w	5000K	36°	Ø200mm
613098	ILS37DLO930WW02	black	37W	2700lm	72.97lm/w	3000K	36°	Ø200mm
613099	ILS37DLO940NW02	black	37W	2900lm	78.39lm/w	4000K	36°	Ø200mm
613100	ILS37DLO950DL02	black	37W	3050lm	82.43lm/w	5000K	36°	Ø200mm
613101	ILS55DLO930WW01	white	55W	4000lm	72.73lm/w	3000K	36°	Ø200mm
613102	ILS55DLO940NW01	white	55W	4300lm	78.18lm/w	4000K	36°	Ø200mm
613103	ILS55DLO950DL01	white	55W	4500lm	81.82lm/w	5000K	36°	Ø200mm
613104	ILS55DLO930WW02	black	55W	4000lm	72.73lm/w	3000K	36°	Ø200mm
613105	ILS55DLO940NW02	black	55W	4300lm	78.18lm/w	4000K	36°	Ø200mm
613106	ILS55DLO950DL02	black	55W	4500lm	81.82lm/w	5000K	36°	Ø200mm

## ACCESSORIES





Code No.	Model No.	Body Color	Body Material	Mounting Type	Dimensions
613112	ILS70REFDLOW01	shiny white	plastic	reflector fitting	Ø63.5x23.5mm
613113	ILS70REFDLOB01	shiny black	plastic	reflector fitting	Ø63.5x23.5mm
613114	ILS70REFDLOGB01	gun black	plastic	reflector fitting	Ø63.5x23.5mm
613115	ILS100REFDLOW01	white	plastic	reflector fitting	Ø92x28mm
613116	ILS100REFDLOB01	shiny black	plastic	reflector fitting	Ø92x28mm
613117	ILS100REFDLOGB01	gun black	plastic	reflector fitting	Ø92x28mm
613118	ILS140REFDLOW01	shiny white	plastic	reflector fitting	Ø133x37.5mm
613119	ILS140REFDLOB01	shiny black	plastic	reflector fitting	Ø133x37.5mm
613120	ILS140REFDLOGB01	gun black	plastic	reflector fitting	Ø133x37.5mm
613121	ILS200REFDLOW01	white	plastic	reflector fitting	Ø187x53mm
613122	ILS200REFDLOB01	black	plastic	reflector fitting	Ø187x53mm
613123	ILS200REFDLOGB01	gun black	plastic	reflector fitting	Ø187x53mm
613124	ILS70SMBDLOW01	white	plastic	surface mounted	Ø101x95mm
613125	ILS70SMBDLOB01	black	plastic	surface mounted	Ø101x95mm
613126	ILS100SMBDLOW01	white	plastic	surface mounted	Ø121x95mm
613127	ILS100SMBDLOB01	black	plastic	surface mounted	Ø121x95mm
613128	ILS140SMBDLOW01	white	plastic	surface mounted	Ø165x110mm
613129	ILS140SMBDLOB01	black	plastic	surface mounted	Ø165x110mm
613130	ILS200SMBDLOW01	white	plastic	surface mounted	Ø221x150mm
613131	ILS200SMBDLOB01	black	plastic	surface mounted	Ø221x150mm
614219	ILS15DLEN70MMDL01	transparent	PC	/	Ø40x14mm
614220	ILS36DLEN70MMDL01	transparent	PC	/	Ø40x14mm
614319	ILS60DLEN70MMDL01	transparent	PC	/	Ø40x14mm
614221	ILS15DLEN100MMDL01	transparent	PC	/	Ø55x18mm
614222	ILS36DLEN100MMDL01	transparent	PC	/	Ø55x18mm
614320	ILS60DLEN100MMDL01	transparent	PC	/	Ø55x18mm
614223	ILS60DLEN140MMDL01	transparent	PC	/	Ø74x24mm
614224	ILS60DLEN200MMDL01	transparent	PC	/	Ø96x30mm

## DIMENSIONS

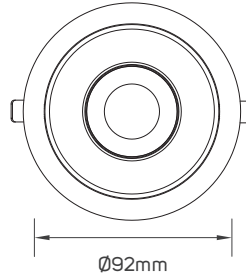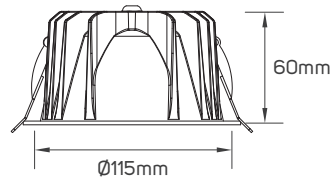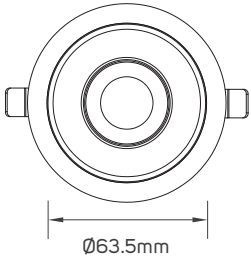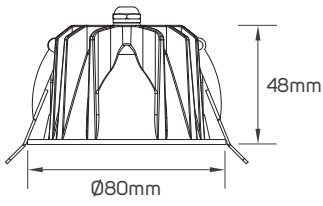



613077 - 613078 - 613079 - 613080 - 613081 - 613082

613083 - 613084 - 613085 - 613086 - 613087 - 613088

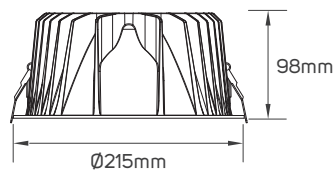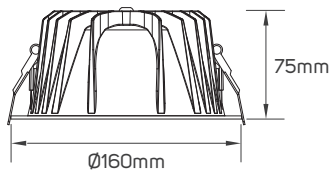


613089 - 613090 - 613091 - 613092 - 613093 - 613094

613095 - 613096 - 613097 - 613098 - 613099 - 613100




613101 - 613102 - 613103 - 613104 - 613105 - 613106


## ACCESSORIES DIMENSIONS




● 613112 - ● 613113 - ● 613114 - Reflector




● 613115 - ● 613116 - ● 613117 - Reflector

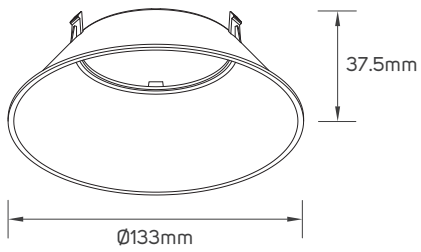


● 613118 - ● 613119 - ● 613120 - Reflector

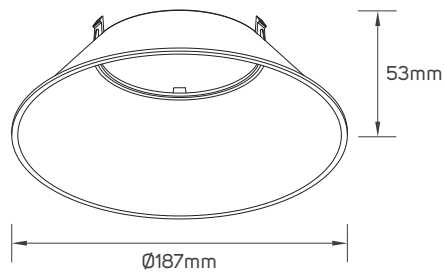


● 613121 - ● 613122 - ● 613123 - Reflector




● 613124 - ● 613125 - Surface Mounted Kit

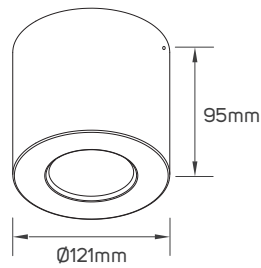

● 613126 - ● 613127 - Surface Mounted Kit


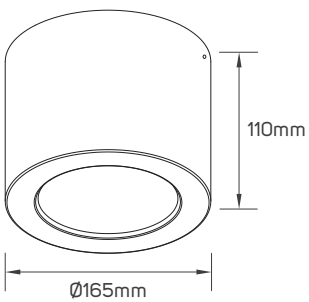


● 613128 - ● 613129 - Surface Mounted Kit

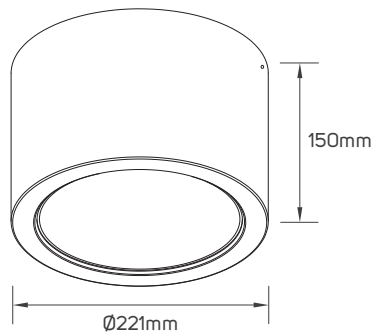



● 613130 - ● 613131 - Surface Mounted Kit

## ACCESSORIES DIMENSIONS



614219 - 614220 - 614319 - Lens

614221 - 614222 - 614320 - Lens

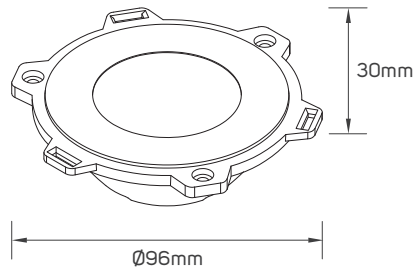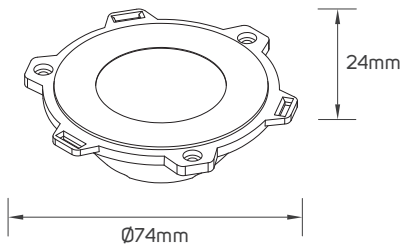

614323 - Lens

614324 - Lens

## APPLICATION PICTURE



This image is for display purpose only, the image may differ from the actual product, as the product is subject to modification provided without prior notice.

## LED RECESSED CEILING LUMINAIRE SERIES

**BEYOND LIGHT..  
TO THE LAST DETAILS!**



Carrer de la Vall de la Ballestera, 64, 46015 València, Valencia, España, Tel: +34619824456

[www.illusillumination.com](http://www.illusillumination.com)

illus illumination reserve the right to make dimensional, design and technical alternations without prior notice. illus illumination endeavor to ensure that any advice, recommendation or information it provides in product literature is accurate and correct. However due to the fact that illus do not have direct control on where and how the products are installed, illus illumination cannot accept any liability either direct or indirect arising from the use of illus products whether or not in accordance with any advice, specification, recommendation or information provided by illus illumination or its distributors.