



**LED PRO**

## Simple & Flexible Solution

### LED FLEXIBLE LINEAR LIGHT

#### **PRODUCT INFORMATION**

- Excellently waterproof and anti-dust LED strips with professional design to guarantee lighting performance.
- It not only ensure high quality of lighting color consistency but also protect products outdoor against from harsh environments outdoors.

#### **BENEFITS**

- Water proof and vivid light color.
- Less maintenance cost and less concerns on water invasion.

#### **FEATURES**

- High CRI>92.
- Operating voltage DC226V.

## AREAS OF APPLICATION



Hospitality



Shopping Center



Commercial



Educational Center


## TECHNICAL OPERATING & ELECTRICAL DATA

LED quantity	72pcs/meter
PCB	single PCB whole thickness 0.15mm, white color, 8mm, copper thickness 25um.
Chip size	5.0x5.0x1.2mm
L70	>20000H
Input	DC226V
Copper wire	0.18mmx28pcs
Maximum length	40 meters
Cutting unit	1 meter cuttable
Size	26x15mm
Other features	w/o RGB controller, sold separately

## SPECIFICATIONS

Code No.	Model No.	IP	Power	CCT
611841	ILS08HVNFRGB01	65, PVC	5.5W/M	RGB

## DIMENSIONS

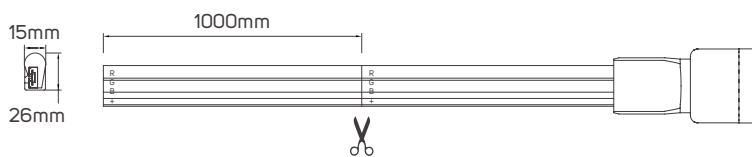


611841

## ACCESSORIES


LED FLEXIBLE LINEAR LIGHT CONNECTOR  
AVAILABLE AS AN ACCESSORY

Code No.	Model No.	IP	Power	Input	Output	Frequency	Dimensions
611951	ILSHVNFALMFCHO2						1000x18.79x20mm
611935	ILSHVNF2HFC02						L=200mm
611971	ILSHVNF2HFC01						L=300mm
611941	ILSHVRFRGBCD01	65	361W	DC226V	DC226V	433.92MHz	35x132x33mm
611929	ILS250HVFLLCG02	65	248W	AC220-240V	DC226V	50/60Hz	42x146x33mm
611930	ILS400HVFLLCG02	65	361W	AC220-240V	DC226V	50/60Hz	42x146x33mm


## ACCESSORIES DIMENSIONS




611951 - Aluminum Profile



611935 - Jumper




611941 - RGB Controller



611971 - Jumper



611929 - 611930 - Flicker-free driver

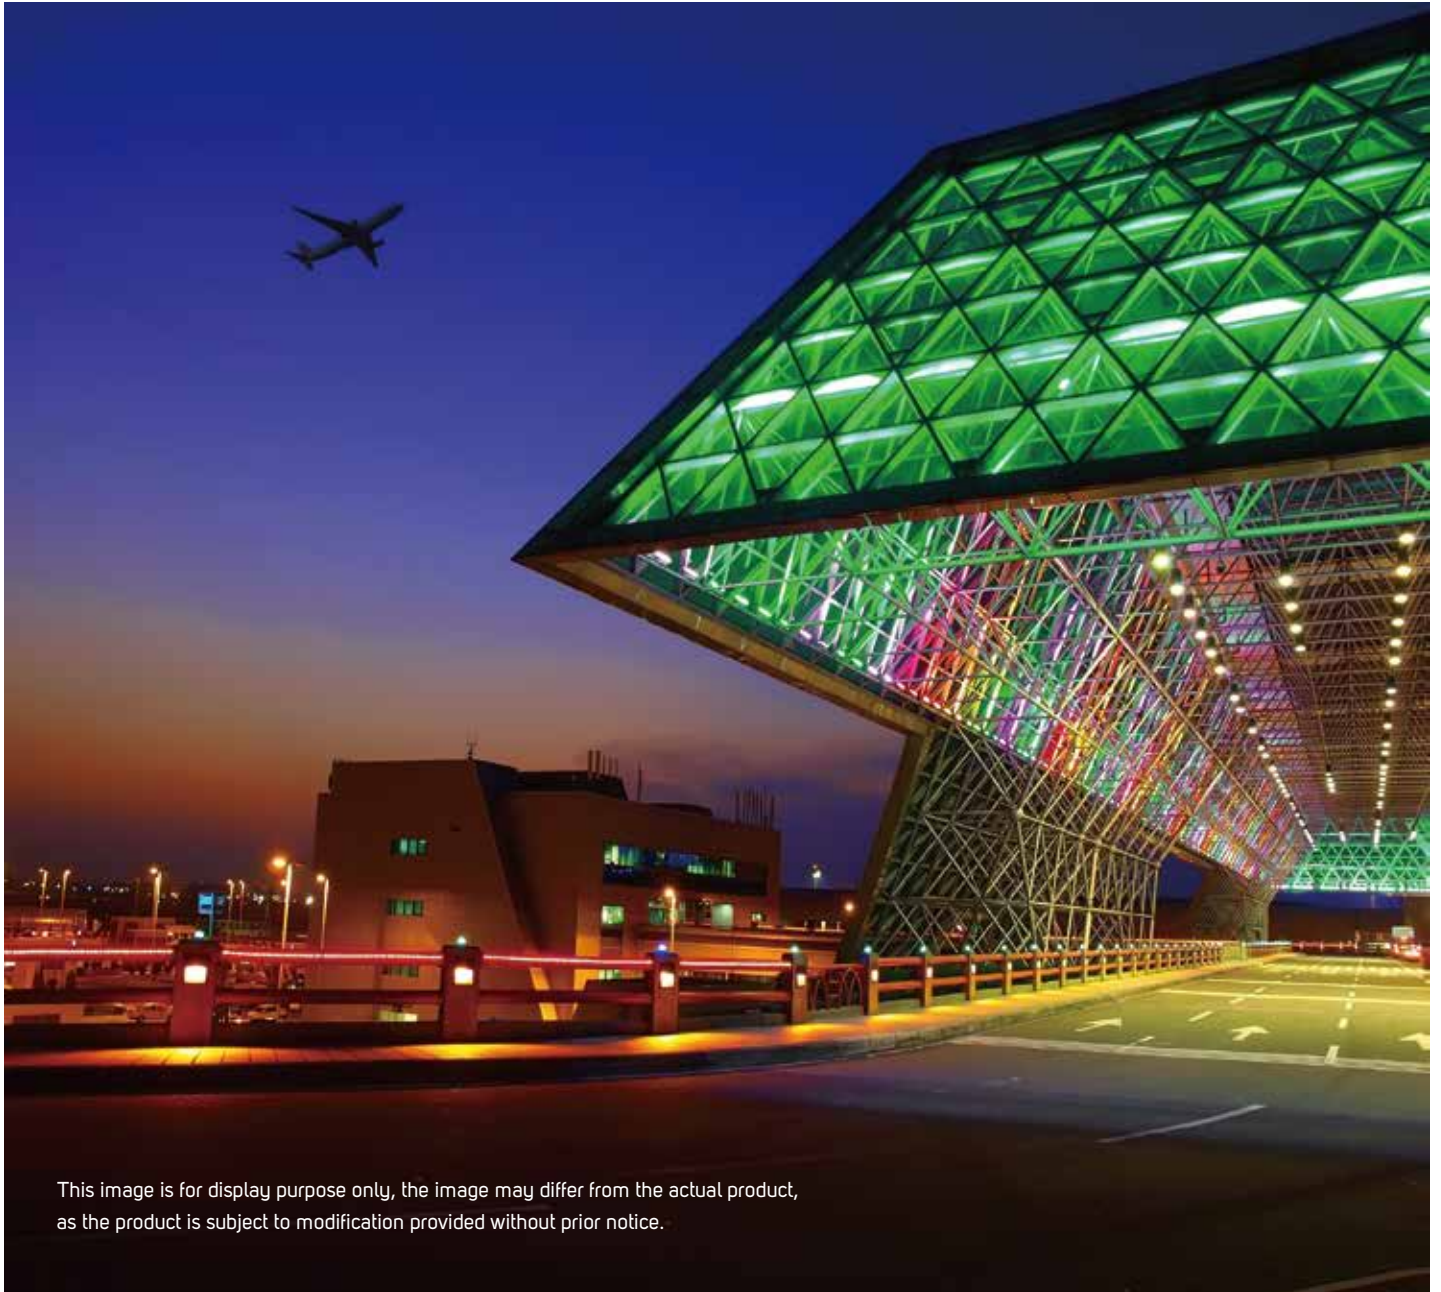

This image is for display purpose only, the image may differ from the actual product, as the product is subject to modification provided without prior notice.

## LED FLEXIBLE LINEAR LIGHT

BEYOND LIGHT..  
TO THE LAST DETAILS!

