




DLINE Bla

Wall & Floor Tiles


Iconography




PORCELAIN TILE .




MATT .



DIGITAL INK-JET .



RECTIFIED .



USE SELF-LEVELERS .



SLIGHT VARIATION .





AUREUS

The new collection of porcelain designed from the inspiration of classic Roman marble. This collection refers to the color of gold, and the golden color is a symbol of luxury and uniqueness that provides a sophisticated and elegant touch to each piece. The porcelain is characterized by an exceptional white background that adds brightness and clarity to the environment in which it is installed. In addition, it has an embossed and gold-veined design, giving it an elegant look.

DENARIUS

is a new collection of porcelain that draws inspiration from the classic marbles of Rome. porcelain product that evokes the classic beauty, name comes from coin of ancient Roman. Like the coin, DENARIUS porcelain represents a symbol of luxury and sophistication. The collection features a white background that brings light and purity to any space. The design, with micro-relief and silver veins, adds a touch of elegance and refinement to the surface. The silver veins create a striking contrast with the white background, making each piece unique and attractive.

Colors

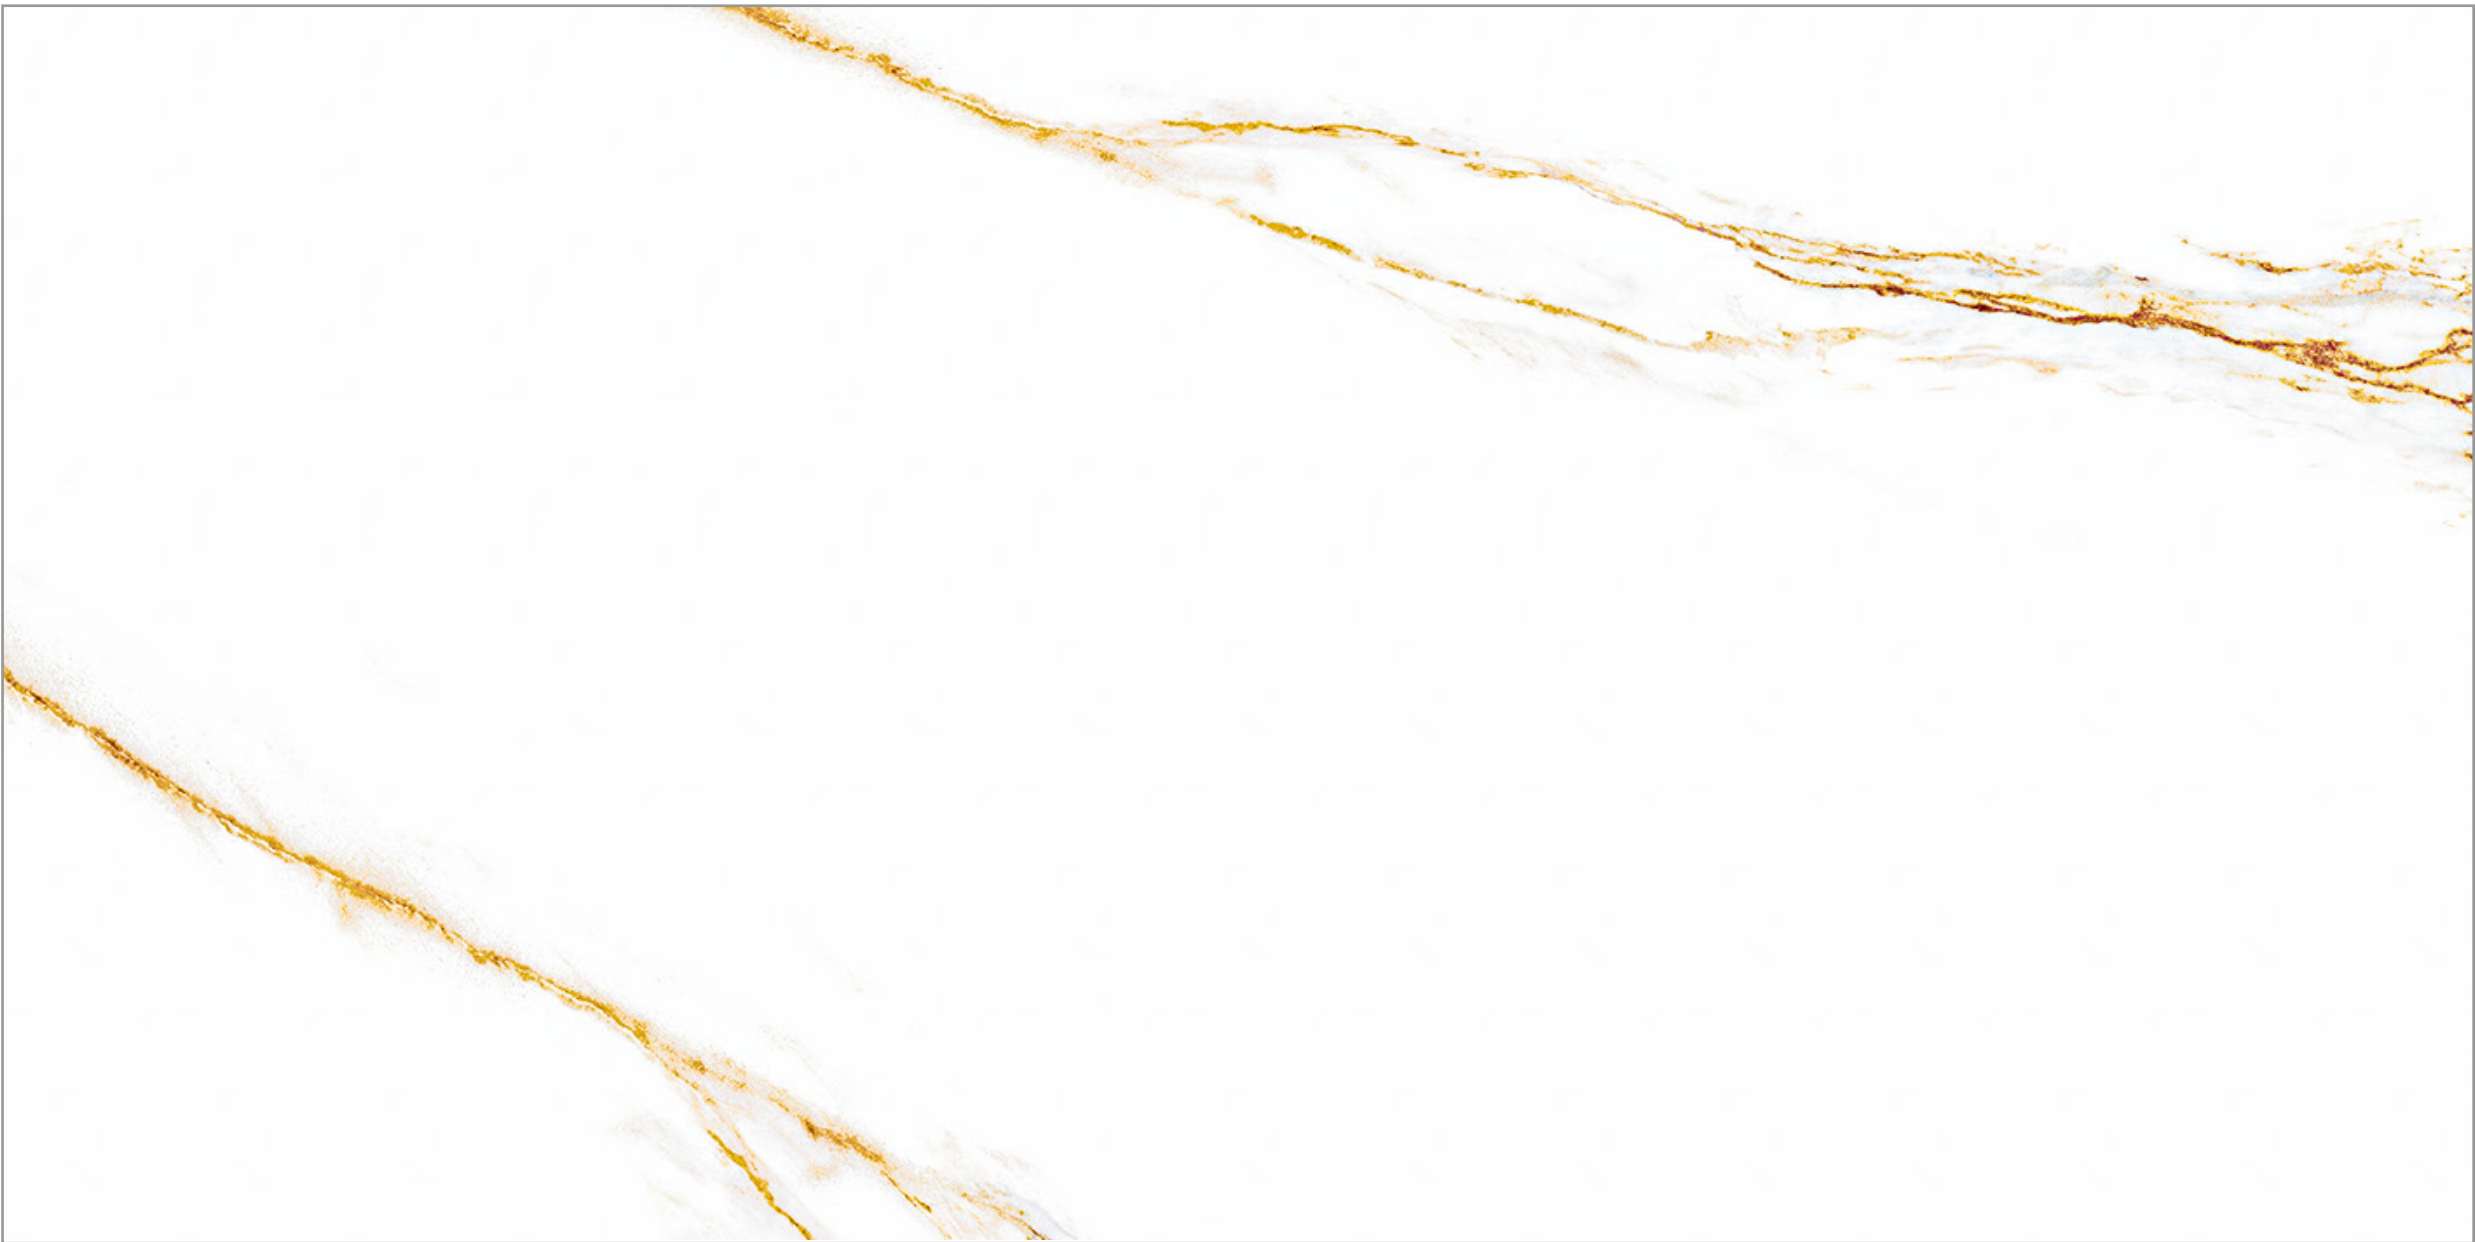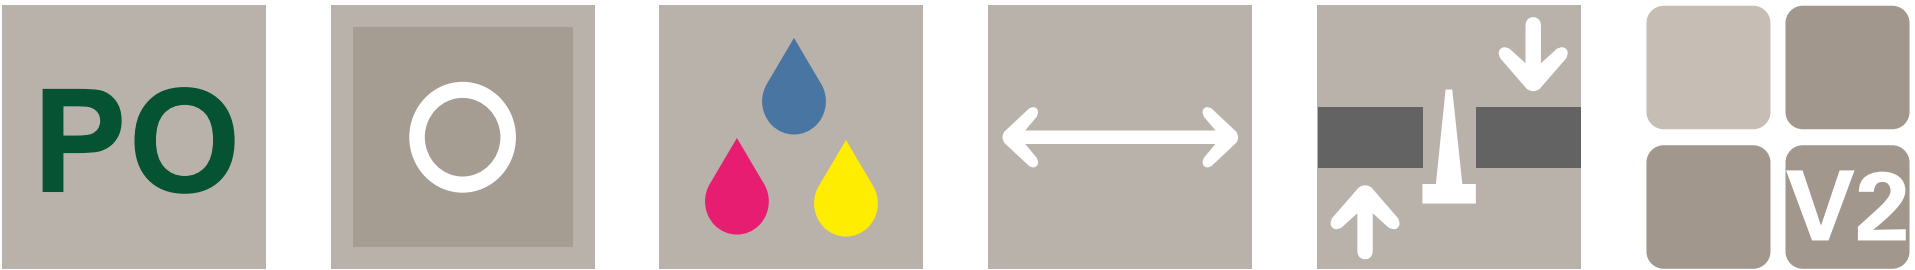

AUREUS



DENARIUS



AUREUS

60x120

CH01420463








DENARIUS

60x120

CH01420462

DIMENSIONS

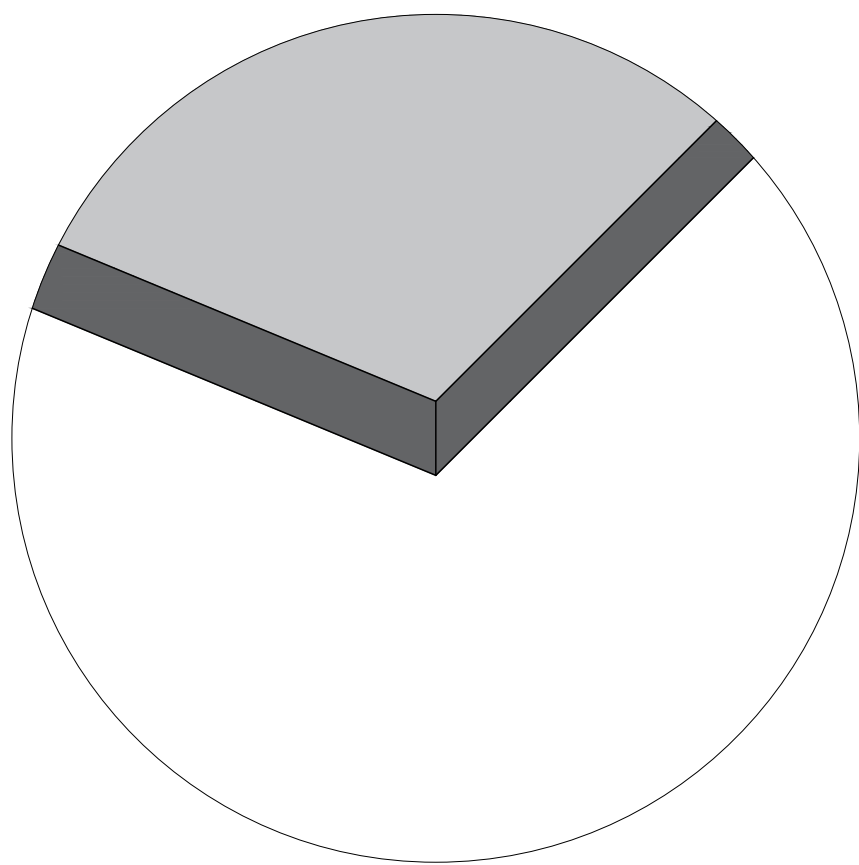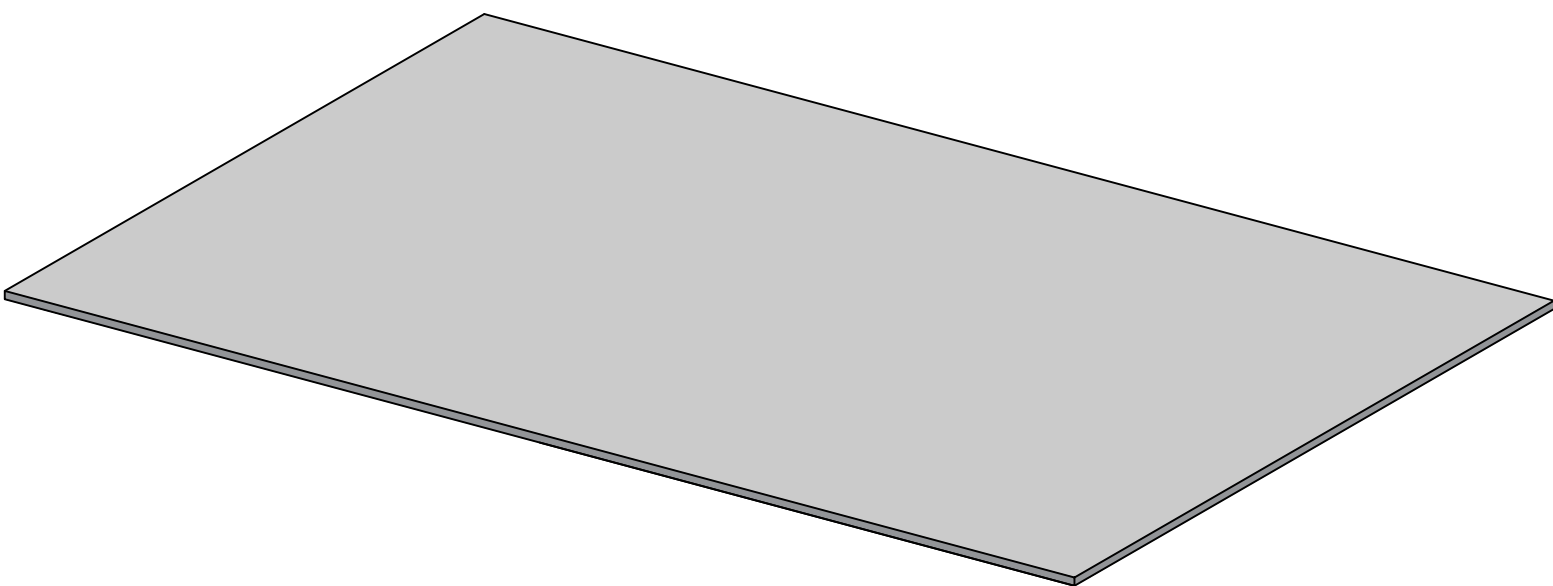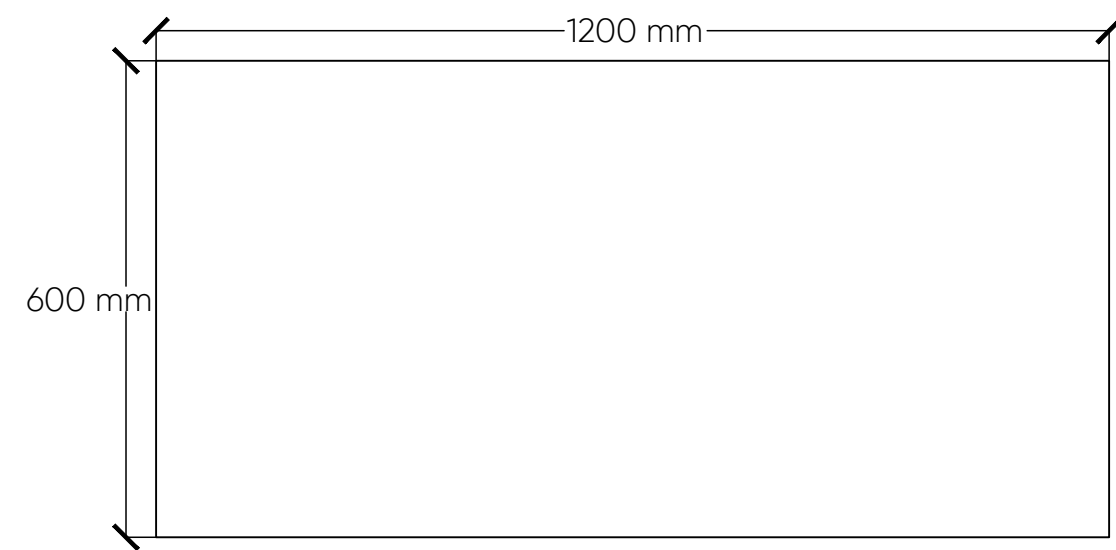


Thickness : 9 mm

AUREUS \ Design variety



DENARIUS \ Design variety

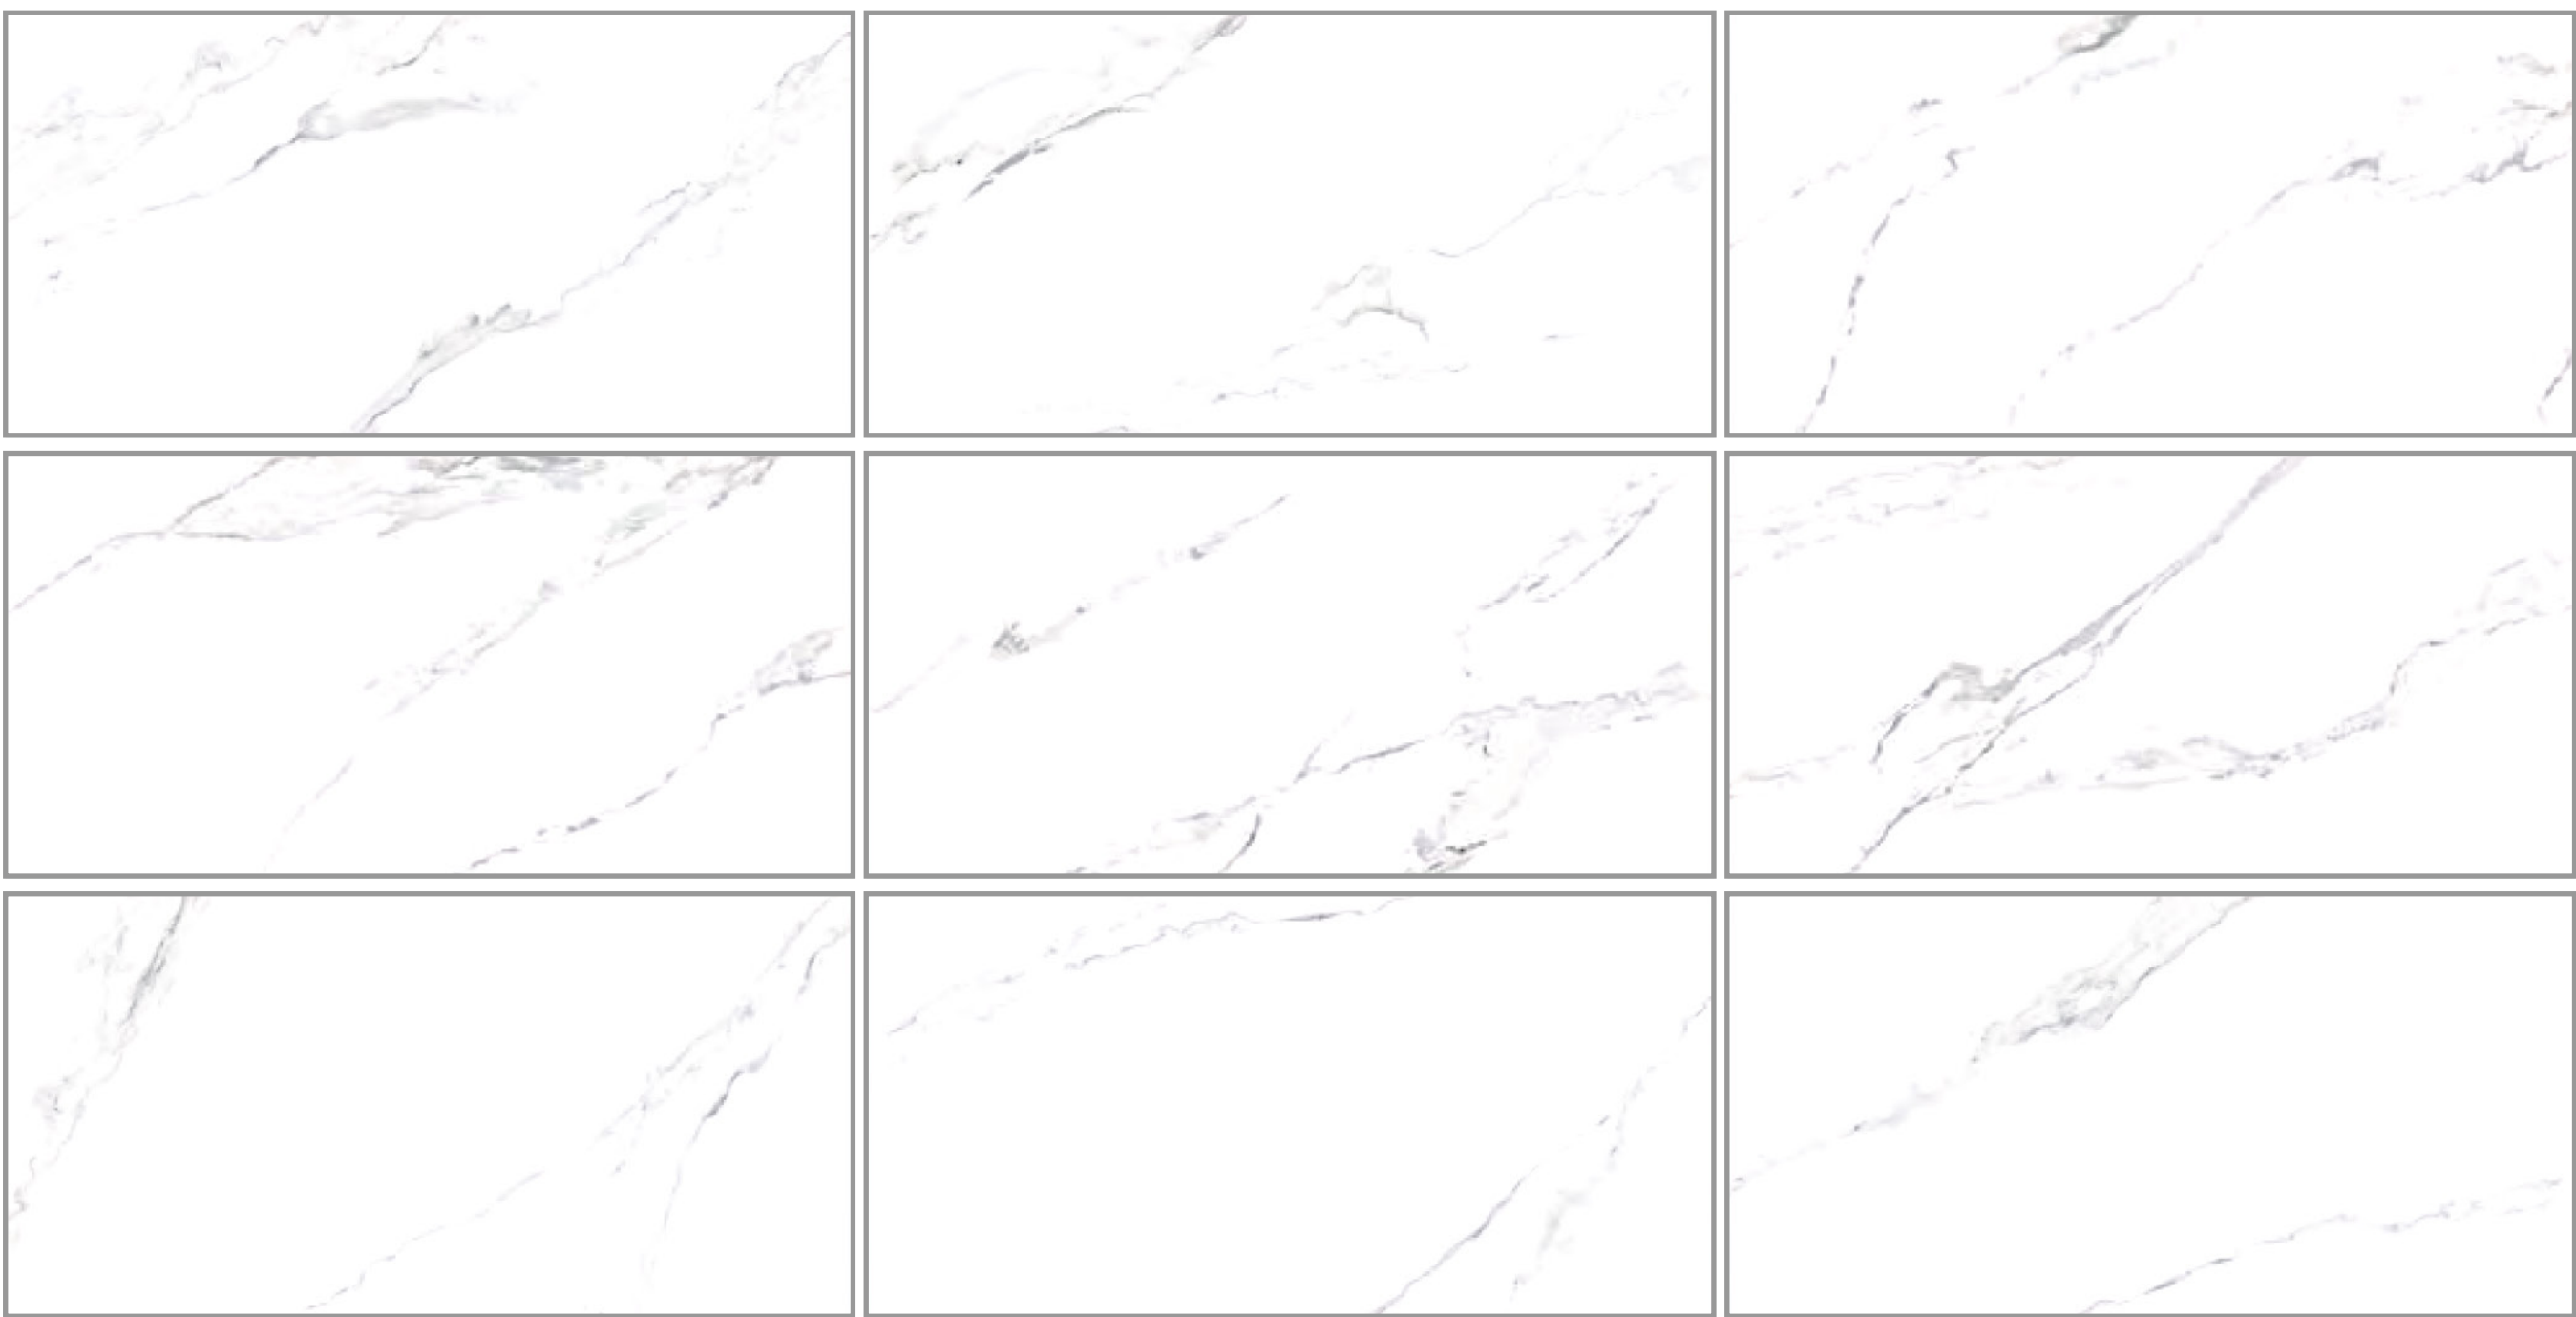



TECHNICAL DATA

Ref : CPag303 Year 23

DRY PRESSED CERAMIC TILES WITH WATER ABSORPTION LOWER THAN 0.5%
Rectified porcelain

Standard	Features	Required Value	Value
EN-ISO 10545 / 3	Water absorption	0, %≤ E ≤3%	≤ 0,5%
EN-ISO 10545 / 4	Breaking strength	≥ 1100 N	≥ 1800 N
EN-ISO 10545 / 4	Bendind strength	≥ 23 N/mm²	≥ 30 N/mm²
UNE EN ISO 10545-12	Durability; Freeze - thaw cycle	Required	Complies with
EN-ISO 10545 / 11	Crazing resistance	Required	Complies with
ISO 10545-7	Resistance to surface abrasion	1-5	Class 4
UNE EN ISO 10545-9	Thermic shock resistance:	Required	Complies with
UNE EN ISO 10545-8	Lineal thermal expansion between 20° to 100°C	Required	6,6-10-6/°C
	Aesthetic classification and shade variations:		V2
EN-ISO 10545 / 14	Stain resistance	Min. class 3	Class5
EN-ISO 10545 / 2	Surface quality	Required	Complies with
UNE-ENV 12633:2003	Slip Resistance (barefoot ramp test)	-	C1
UNE EN ISO 10545-13	Resistance to High concentration acids	Min. B	A/LA/HA

Item number	Product name	Critical Angle of Sliding
CH01420463	AUREUS 60X120 Spanish porcelain	R9
CH01420462	DENARIUS 60X120 Spanish porcelain	R9



2023

Kingdom of Saudi Arabia

Customer care. 8001222230

WhatsApp. +966112735290

E.Mail. customer-care@marketing-home.com

<https://www.ceramichome.com.sa>