



Wall & Floor Tiles


## Iconography



PORCELAIN CLAY



SATIN



RECTIFIED










Thickness: ± 10 mm

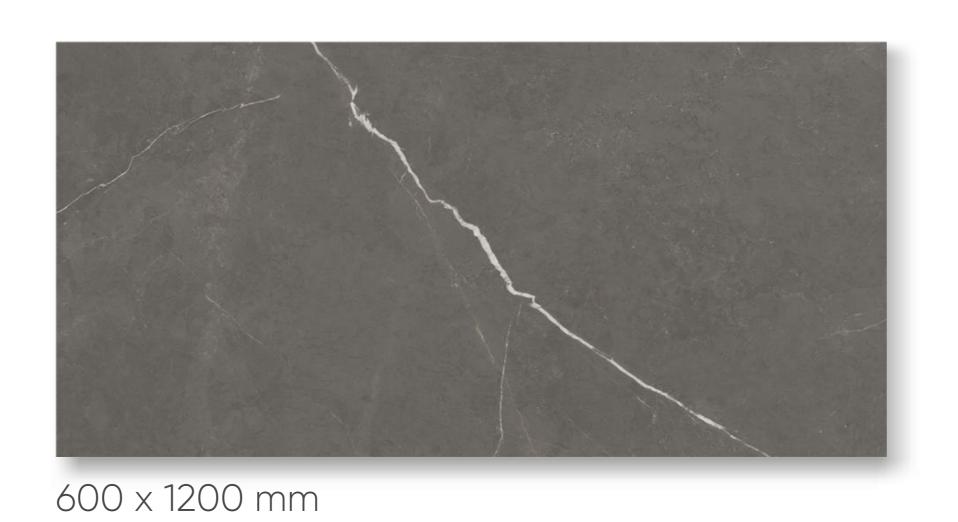





1000 x 1000 mm















## GRAPHITE SATIN

Porcelain has a natural greyish color, such as rich rock colors, containing very fine white vein marks. Gray is a color that fits at points of intersection with most other colors. It goes well with wood, metal and other materials

600 x 1200 mm CH01890026







1000 x 1000 mm CH014100120
























## SOMKE SATIN

A carefully selected collection of porcelain wall and floor tiles in stone overtones with a distinctive and eclectic character expressed in a similarity to three aesthetics: marble, stone, glossy and matte decorative collections inspired by nature



1000 x 1000 mm CH014100119 600 x 1200 mm CH014100118





## TECHNICAL DATA

Ref: G463R - G413R - G413R - G463R

DRY PRESSED CERAMIC TILES WITH WATER ABSORPTION LOWER THAN 0.5% Rectified porcelain

Product Name: GRUPO Bla

Standard	Features	Required Value	Value
EN-ISO 10545 / 3	Water absorption	0, %≤ E ≤3%	E < 0,5%
EN-ISO 10545 / 4	Breaking strength	≥ 1100 N	≥1300 N
EN-ISO 10545 / 4	Bending strength	≥ 23 N/mm <sup>2</sup>	≥ 35 N/mm <sup>2</sup>
UNE EN ISO 10545-12	Durability; Freeze - thaw cycle	Required	Complies with
EN-ISO 10545 / 11	Crazing resistance	Required	Complies with
ISO 10545-7	Resistance to surface abrasion	1 – 5	Consult according to model
	Aesthetic classification and shade variations:		V.2
EN-ISO 10545 / 14	Stain resistance	Min. class 3	Class 5
UNE EN ISO 10545-13	Resistance to High concentration acids	Min. LB	Complies with
UNE EN ISO 10545-13	Household chemicals and swimning pool salts	Min. B	Complies with
UNE EN ISO 10545-13	Low concentration of alkalis	Min. LB	Complies with



2023

Kingdom of Saudi Arabia

Customer care. 8001222230 WhatsApp. +966112735290 E.Mail. customer-care@marketing-home.com

https://www.ceramichome.com.sa