



LED PRO

Simple and flexible solution to design modern light lines in professional and retail spaces

LED MAGNETIC TRACK PENDANT LIGHT SERIES

PRODUCT INFORMATION

- Modern looking, neat luminaire offering comfortable, good quality lighting and can also work as a design element.
- Ideal lighting in the non-working areas of professional spaces such as offices, educational institutes, and also the welcoming areas and entrances of retail spaces.
- ILLUS LED MAGNETIC TRACK SPOT Light gives the customer the flexibility to choose between 12 models based on their specific need with lumen package from 370 lm to 1050 lm.

BENEFITS

- Clean and uniform light.
- Multiple application use.
- Easy to install and maintain.

FEATURES

- High CRI>90.
- Efficacy up to 106 lm/w.
- Long life span 30,000 hrs.
- Operating voltage DC48V.
- Non – dimmable.



**BEYOND LIGHT..
TO THE LAST DETAILS!**

AREAS OF APPLICATION



Hospitality



Shopping Center



Commercial



Educational Center


TECHNICAL OPERATING & ELECTRICAL DATA

IP Rating	IP20
CRI	90
Body Color	Sandy White
Body Material	Aluminum+Industrial Plastic
Lumen	from 370 to 1050lm/M+/-10%
Operating Voltage	DC48V
Frequency	50/60Hz
Beam Angle	24°
Mounting Type	Track Mounted
Dimming	Non-Dimmable
Directional or Non Directional	Directional
Fixed or Adjustable	Fixed
Life Span	30000h


SPECIFICATIONS

Code No.	Model No.	Power	Lumen	Efficacy	CCT
614552	ILS8.5W24DMTPL930WWW01	8.5W	850lm	100lm/W	3000K
614553	ILS8.5W24DMTPL940NWW01	8.5W	900lm	105.88lm/W	4000K
614554	ILS5W24DMTPL930WWW01	5W	450lm	90lm/W	3000K
614555	ILS5W24DMTPL940NWW01	5W	480lm	96lm/W	4000K
614556	ILS7W24DMTPL930WWW01	7W	650lm	92.86lm/W	3000K
614557	ILS7W24DMTPL940NWW01	7W	700lm	100lm/W	4000K
614558	ILS12W24DMTPL930WWW01	12W	950lm	79.17lm/W	3000K
614559	ILS12W24DMTPL940NWW01	12W	1050lm	87.50lm/W	4000K
614560	ILS4.5W24DMTPL930WWW01	4.5W	370lm	82.22lm/W	3000K
614561	ILS4.5W24DMTPL940NWW01	4.5W	450lm	100lm/W	4000K
614562	ILS4.5W24DMTPL930WWW02	4.5W	380lm	84.44lm/W	3000K
614563	ILS4.5W24DMTPL940NWW02	4.5W	400lm	88.89lm/W	4000K


DIMENSIONS

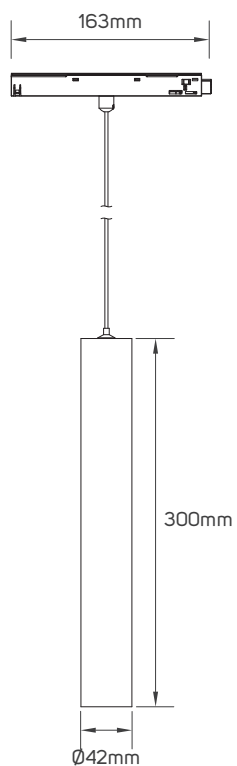


614552 - 614553

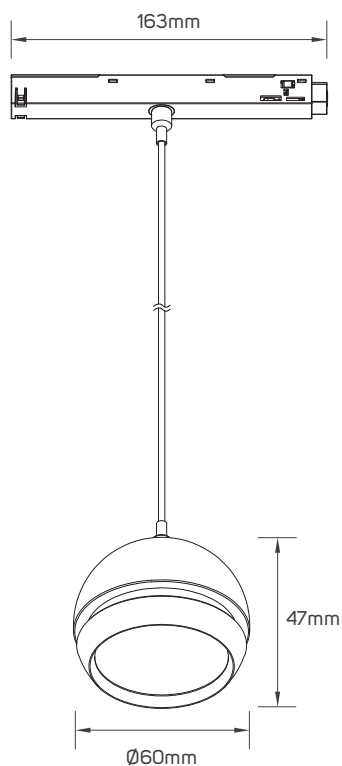

614554 - 614555

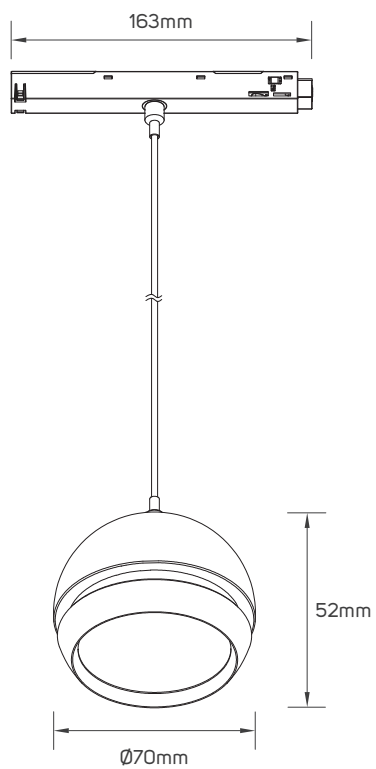


614556 - 614557

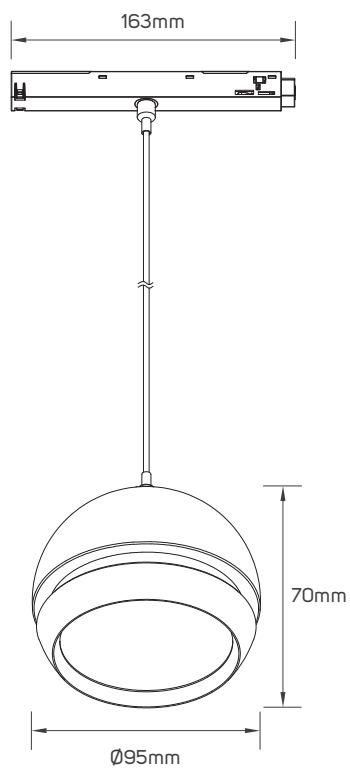


614558 - 614559

DIMENSIONS

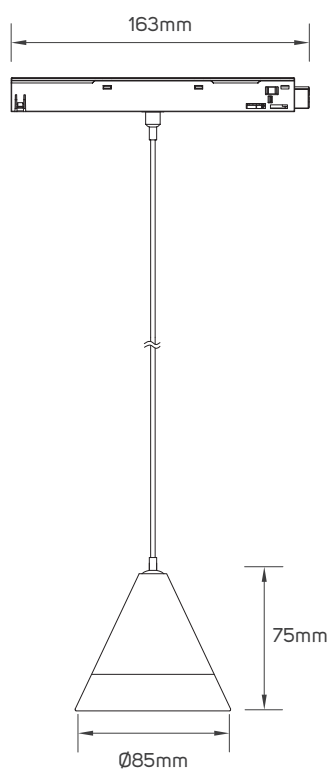

614560 - 614561

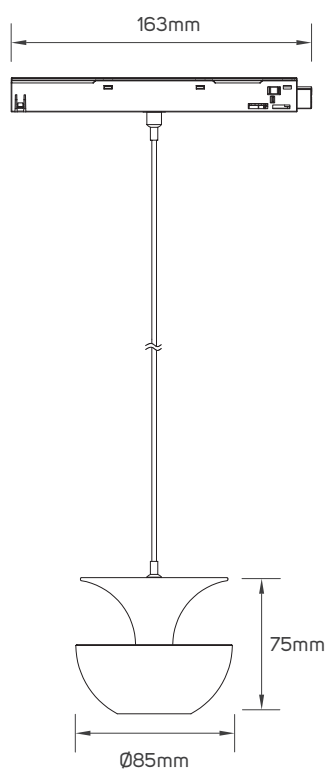


614562 - 614563


ACCESSORIES

Code No.	Model No.	Body Color	Body Material	Power
614564	ILS1M4RTLW01	sandy white	aluminum	/
614565	ILS2M4RTLW01	sandy white	aluminum	/
614566	ILS3M4RTLW01	sandy white	aluminum	/
614567	ILS1M4RTLW02	sandy white	aluminum	/
614568	ILS2M4RTLW02	sandy white	aluminum	/
614569	ILS3M4RTLW02	sandy white	aluminum	/
614570	ILS48VPSTRKW01	sandy white	plastic	150W
614571	ILSRATRKW01	sandy white	aluminum	/
614572	ILSRATRKW02	sandy white	aluminum	/
614573	ILSSMATRKW01	sandy white	aluminum	/
614574	ILSSMATRKW02	sandy white	aluminum	/
614575	ILSCITRKW01	sandy white	plastic	/
614576	ILSCLTRKW01	sandy white	plastic	/
613682	ILSPKITTRK01	silver	steel	/
613683	ILSTKITTRK01	silver	aluminum	/


ACCESSORIES DIMENSIONS

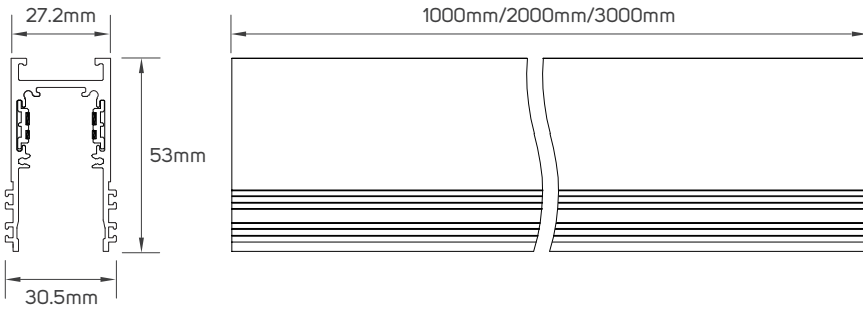

614564 - 614565 - 614566

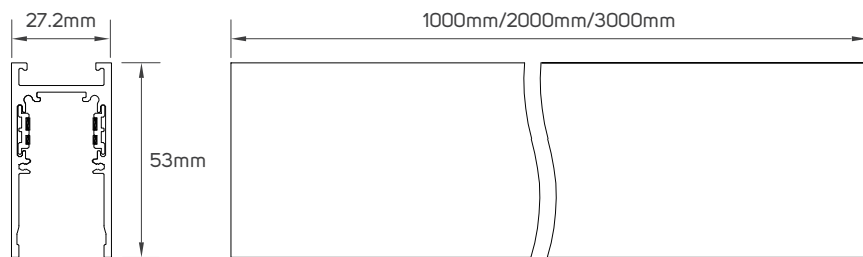





614567 - 614568 - 614569

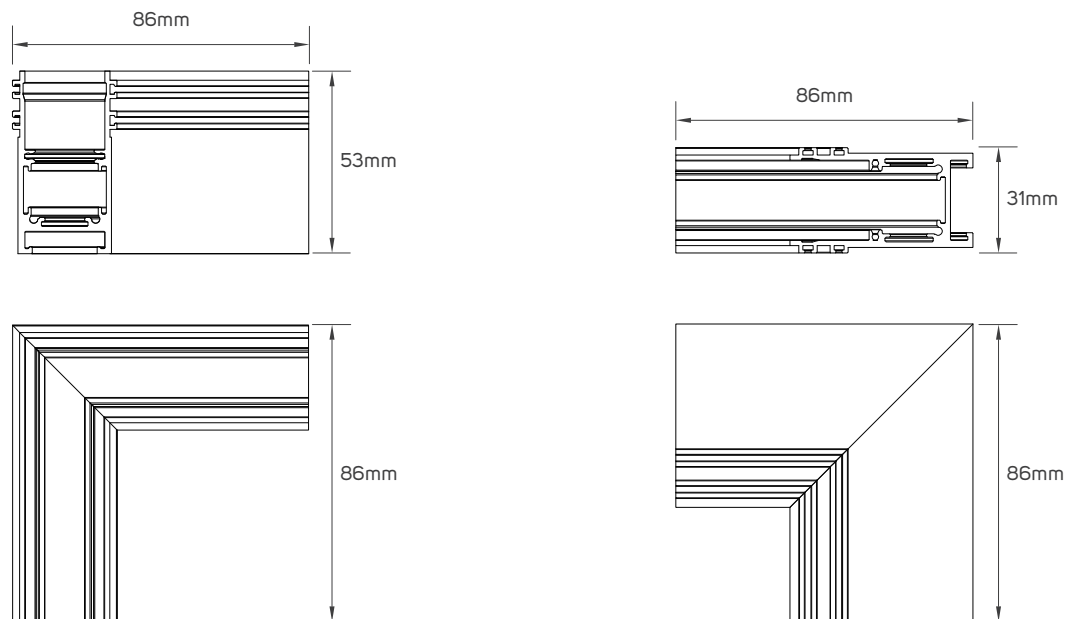

614571


614572

ACCESSORIES DIMENSIONS

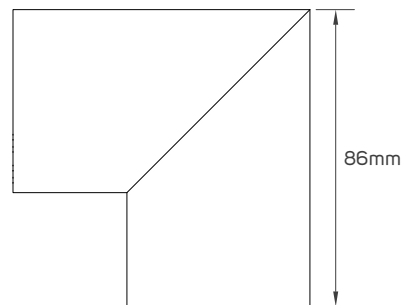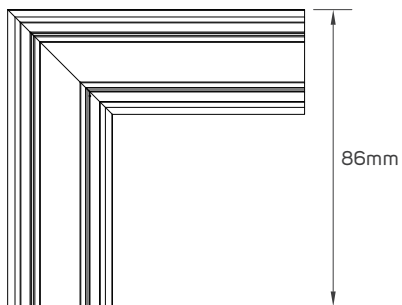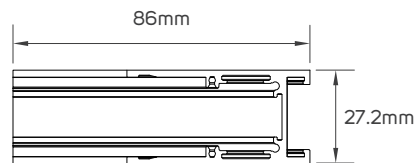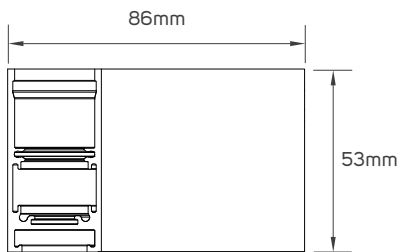


614573


614574

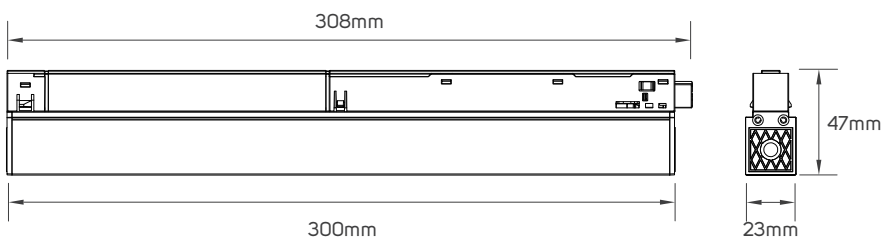

614570

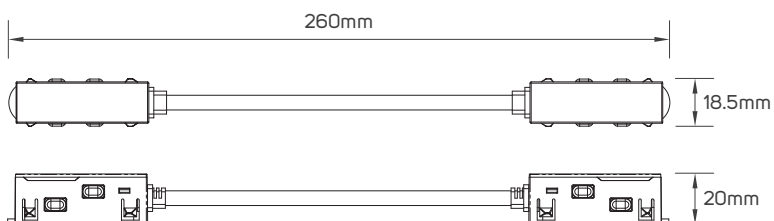


614575

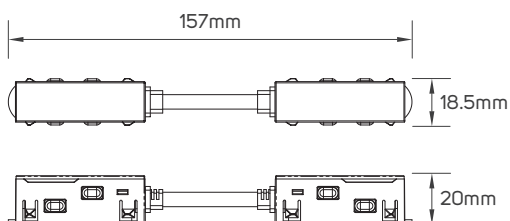


614576

ACCESSORIES DIMENSIONS

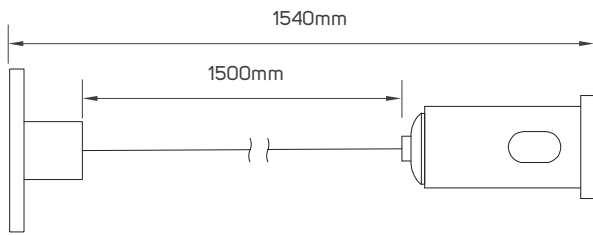

613682

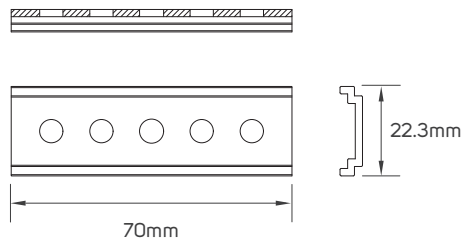

613683



LED MAGNETIC TRACK PENDANT LIGHT SERIES

**BEYOND LIGHT..
TO THE LAST DETAILS!**



Carrer de la Vall de la Ballestera, 64, 46015 València, Valencia, España, Tel: +34619824456

www.illusillumination.com

illus illumination reserve the right to make dimensional, design and technical alternations without prior notice. illus illumination endeavor to ensure that any advice, recommendation or information it provides in product literature is accurate and correct. However due to the fact that illus do not have direct control on where and how the products are installed, illus illumination cannot accept any liability either direct or indirect arising from the use of illus products whether or not in accordance with any advice, specification, recommendation or information provided by illus illumination or its distributors.