



**Suitable Light for General Lighting applications**

## LED RECESSED CEILING LUMINAIRE SERIES

### PRODUCT INFORMATION

- Suitable for a series of lighting applications in office, retail and general area lighting.
- Available in a wide variety of lumen packs, cut out size and color temperature.
- ILLUS LED RECESSED CEILING Luminaire gives the customer the flexibility To choose between 12 models based on their specific need with lumen package from 460 lm to 1720 lm.

### BENEFITS

- Compact design for better integration with the building.
- Comfortable light with high efficiency.
- Reliable performance for indoor applications.

### FEATURES

- High CRI>95.
- Long life span 30,000 hrs.
- Operating voltage AC220 – 240V.
- Non – dimmable.

## AREAS OF APPLICATION



Hospitality



Public indoor



Shopping Center



Commercial



Workplace



Educational center




## TECHNICAL OPERATING & ELECTRICAL DATA

Input Voltage & Frequency	AC220-240V, 50/60Hz
Rated CRI	>95
Beam Angle	24°
Life Span	30,000h
Ingress Protection Rating	IP20
Dimming	Non-Dimmable
Ambient Temperature	-20°C~45°C
Switching Cycle ON/OFF	100,000
Body Material	Aluminum


## SPECIFICATIONS

Code No.	Model No.	Power	CCT	Lumen	Efficacy	Body Color
LI613826	ILS6WPPRSL930WW01	6.5W	3000K	460lm	70.77lm/w	White + Black
LI613827	ILS6WPPRSL930WW02	6.5W	3000K	460lm	70.77lm/w	Black
LI613828	ILS6WPPRSL940NW01	6.5W	4000K	470lm	72.31lm/w	White + Black
LI613829	ILS6WPPRSL940NW02	6.5W	4000K	470lm	72.31lm/w	Black
LI613832	ILS12WPPRSL930WW01	12W	3000K	900lm	75lm/w	White + Black
LI613833	ILS12WPPRSL930WW02	12W	3000K	900lm	75lm/w	Black
LI613834	ILS12WPPRSL940NW01	12W	4000K	920lm	76.67lm/w	White + Black
LI613835	ILS12WPPRSL940NW02	12W	4000K	920lm	76.67lm/w	Black
LI613838	ILS24WPPRSL930WW01	24W	3000K	1680lm	70lm/w	White + Black
LI613839	ILS24WPPRSL930WW02	24W	3000K	1680lm	70lm/w	Black
LI613840	ILS24WPPRSL940NW01	24W	4000K	1720lm	71.67lm/w	White + Black
LI613841	ILS24WPPRSL940NW02	24W	4000K	1720lm	71.67lm/w	Black


## **I** DIMENSIONS

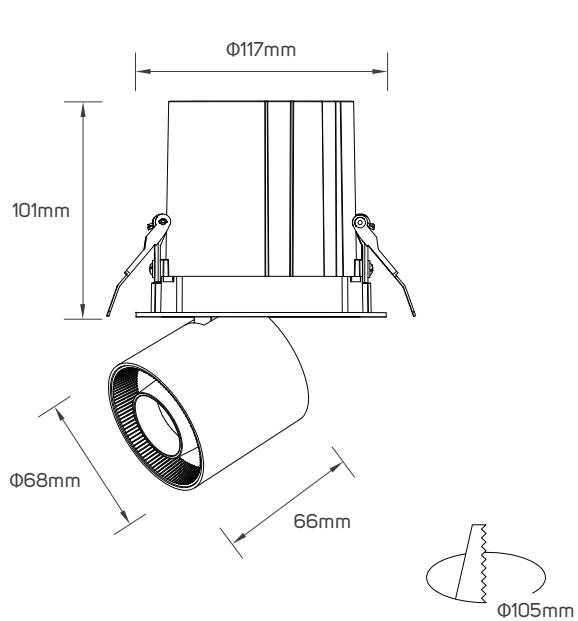

LI613826 - LI613827 - LI613828 - LI613829

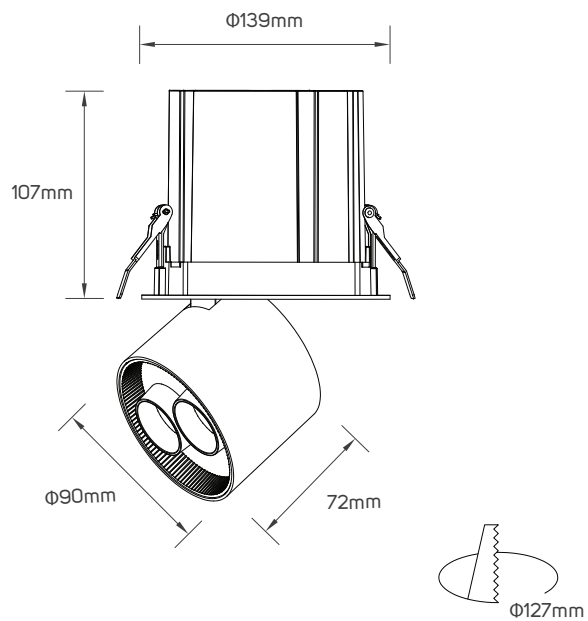

LI613832 - LI613833 - LI613834 - LI613835

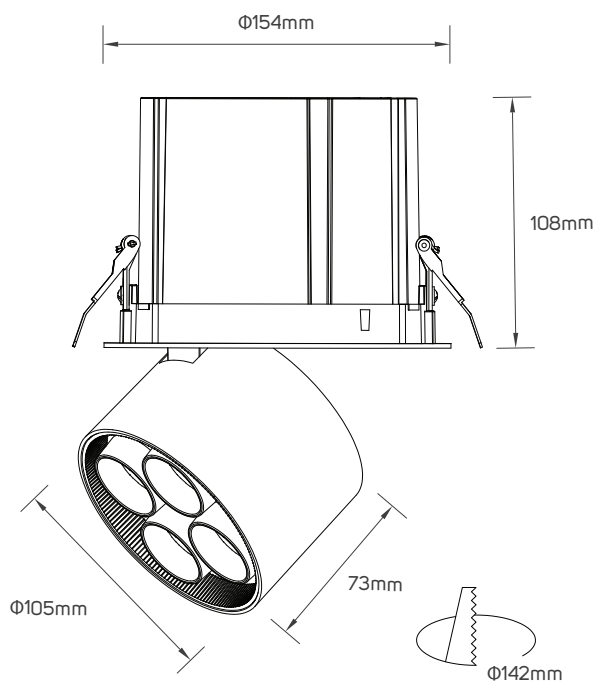

LI613838 - LI613839 - LI613840 - LI613841

## APPLICATION PICTURE



This image is for display purpose only, the image may differ from the actual product, as the product is subject to modification provided without prior notice.

## LED RECESSED CEILING LUMINAIRE SERIES

**BEYOND LIGHT..  
TO THE LAST DETAILS!**



Carrer de la Vall de la Ballestera, 64, 46015 València, Valencia, España, Tel: +34619824456

[www.illusillumination.com](http://www.illusillumination.com)

illus illumination reserve the right to make dimensional, design and technical alternations without prior notice. illus illumination endeavor to ensure that any advice, recommendation or information it provides in product literature is accurate and correct. However due to the fact that illus do not have direct control on where and how the products are installed, illus illumination cannot accept any liability either direct or indirect arising from the use of illus products whether or not in accordance with any advice, specification, recommendation or information provided by illus illumination or its distributors.