



Simple and flexible solution to design modern light lines in professional and retail spaces

LED BOLLARD LUMINAIRE SERIES

PRODUCT INFORMATION

- Modern looking, neat luminaire offering comfortable, good quality lighting and can also work as a design element.
- Ideal lighting in the non-working areas of professional spaces such as offices, educational institutes, and also the welcoming areas and entrances of retail spaces.
- ILLUS LED BOLLARD luminaire gives the customer the flexibility to choose between 18 models based on their specific need with lumen package from 200 lm to 790 lm.

BENEFITS

- Clean and uniform light.
- Multiple application use.
- Easy to install and maintain.

FEATURES

- Efficacy up to 94 lm/w.
- Long life span 30,000 hrs.
- Operating voltage AC100-220V.
- Non – dimmable.



**BEYOND LIGHT..
TO THE LAST DETAILS!**

AREAS OF APPLICATION



Hospitality



Shopping Center



Commercial



Educational Center




TECHNICAL OPERATING & ELECTRICAL DATA

CCT	3000K
Body Color	Dark Gray
Body Material	Aluminum
Ambient Temperature	-20°C~45°C
Voltage	AC100-240V
Frequency	50/60Hz
Dimming	Non-Dimmable
Directional or Non Directional	Directional
Fixed or Adjustable	Fixed
Life Span	30000h
Switching Cycle	15000


SPECIFICATIONS

Code No.	Model No.	Power	Lumen	Efficacy	Beam Angle	IP	CRI
LI521311	ILS8SMOBDL02	8.5W	500lm	58.82lm/W	60°	65	85
LI521312	ILS8SMOBDL03	8.5W	500lm	58.82lm/W	60°	65	85
LI521313	ILS12SMOBDL03	13W	550lm	42.31lm/W	140°	65	85
LI521314	ILS12SMOBDL04	13W	550lm	42.31lm/W	140°	65	85
LI521315	ILS8SMOBDL04	8W	750lm	93.75lm/W	100°	65	95
LI521316	ILS6SMOBDL01	7W	200lm	28.57lm/W	70°	54	95
LI521318	ILS8SMOBDL05	8.5W	385lm	45.29lm/W	70°	65	85
LI521319	ILS8SMOBDL06	8.5W	385lm	45.29lm/W	70°	65	85
LI521321	ILS12SMOBDL05	12.5W	600lm	48lm/W	120°	65	85
LI521322	ILS12SMOBDL06	12.5W	600lm	48lm/W	120°	65	85
LI521323	ILS12SMOBDL07	12.5W	445lm	35.60lm/W	100°	65	85
LI521324	ILS12SMOBDL08	12.5W	790lm	63.20lm/W	180°	65	85
LI521325	ILS12SMOBDL09	12.5W	790lm	63.20lm/W	180°	65	85
LI521326	ILS12SMOBDL10	12.5W	790lm	63.20lm/W	180°	65	85
LI521327	ILS12SMOBDL11	13W	220lm	16.92lm/W	140°	54	85
LI521328	ILS12SMOBDL12	13W	220lm	16.92lm/W	140°	54	85
LI521329	ILS12SMOBDL13	13W	590lm	45.38lm/W	180°	65	85
LI521330	ILS12SMOBDL14	13W	590lm	45.38lm/W	180°	65	85


DIMENSIONS

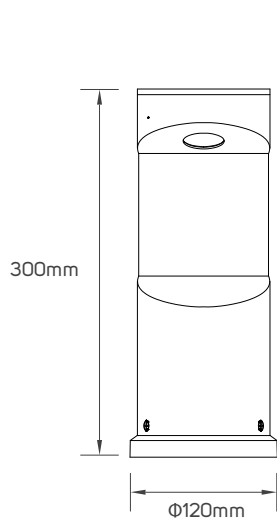


LI521311

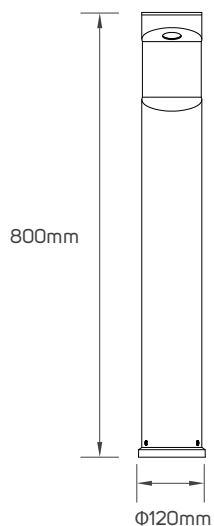


LI521312

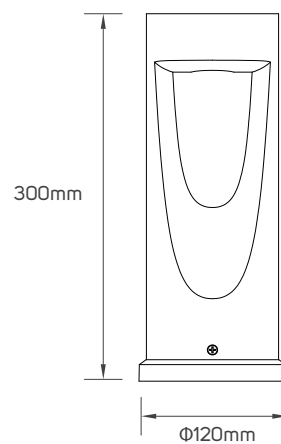


LI521313

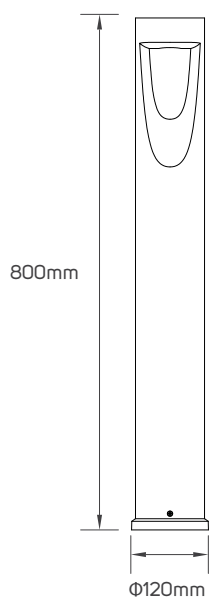


LI521314

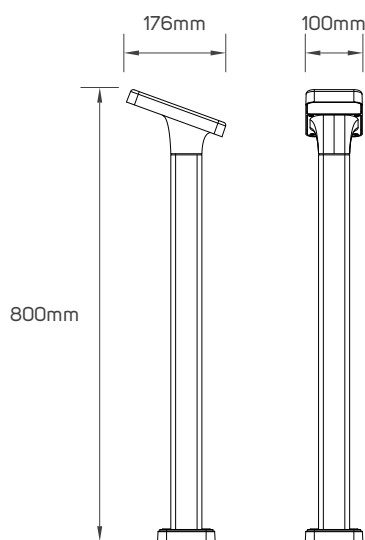


LI521315

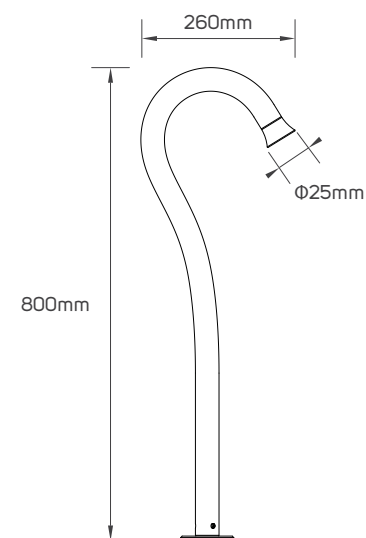


LI521316

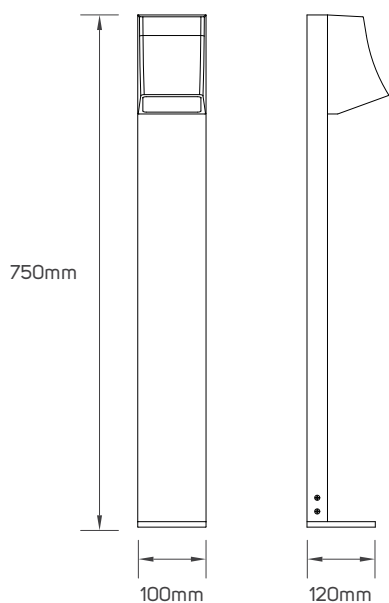

LI521318

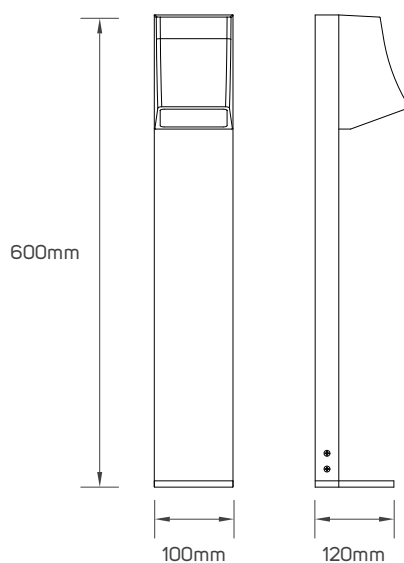


LI521319

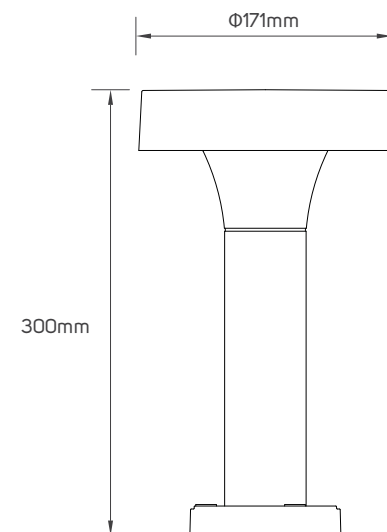


LI521321


DIMENSIONS

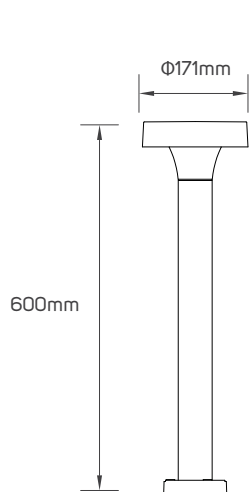


LI521322

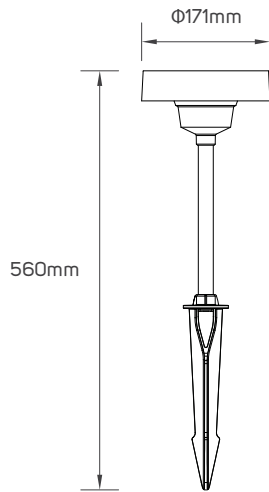


LI521323

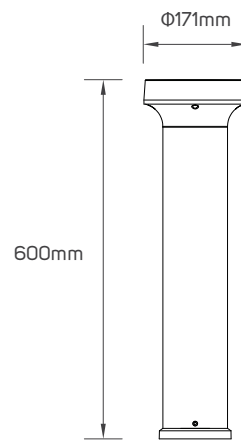


LI521324

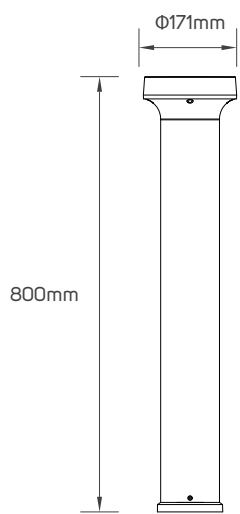


LI521325

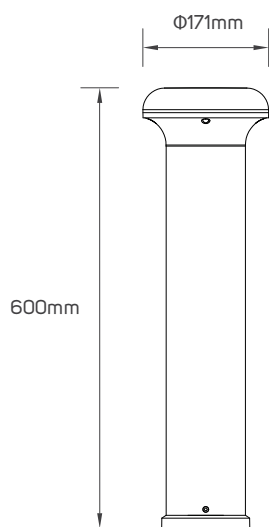


LI521326

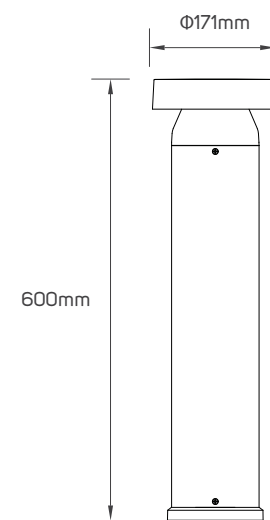


LI521327

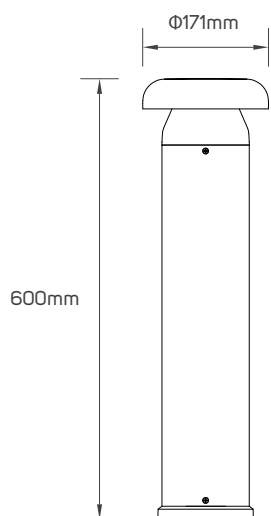

LI521328

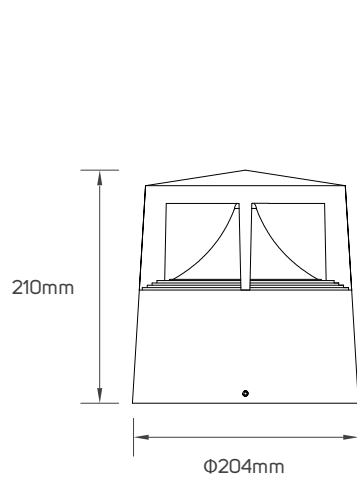

LI521329

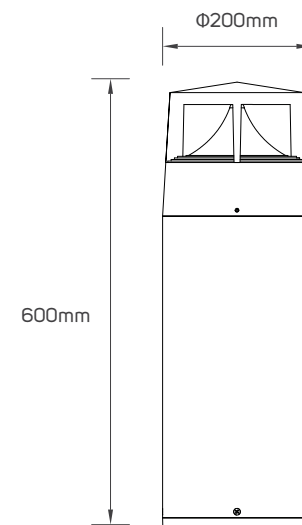

LI521330



**LED
BOLLARD LUMINAIRE
SERIES**

**BEYOND LIGHT..
TO THE LAST DETAILS!**

