

Fanal



منزل  
السيراميك

# PULPIS

Wall & Floor Tiles





**PR** PORCELAIN TILES **F** FLOOR TILES **W** WALL TILES **X** POLISHED MATT **□** RECTIFIED **■** DESTONIFIED V1 **■** GRAPHIC VARIATION

# PULPIS


This collection is characterized by its smooth surface, giving it an elegant and modern look. It can be used for both floors and walls in various types of interior spaces such as bathrooms, kitchens, and living rooms. It is available in a variety of colors and sizes, allowing you to choose the one that suits your personal style and the decor of the space. It is also easy to clean, making it an ideal choice for high-traffic areas



# WHITE

---

Thickness: 9 mm

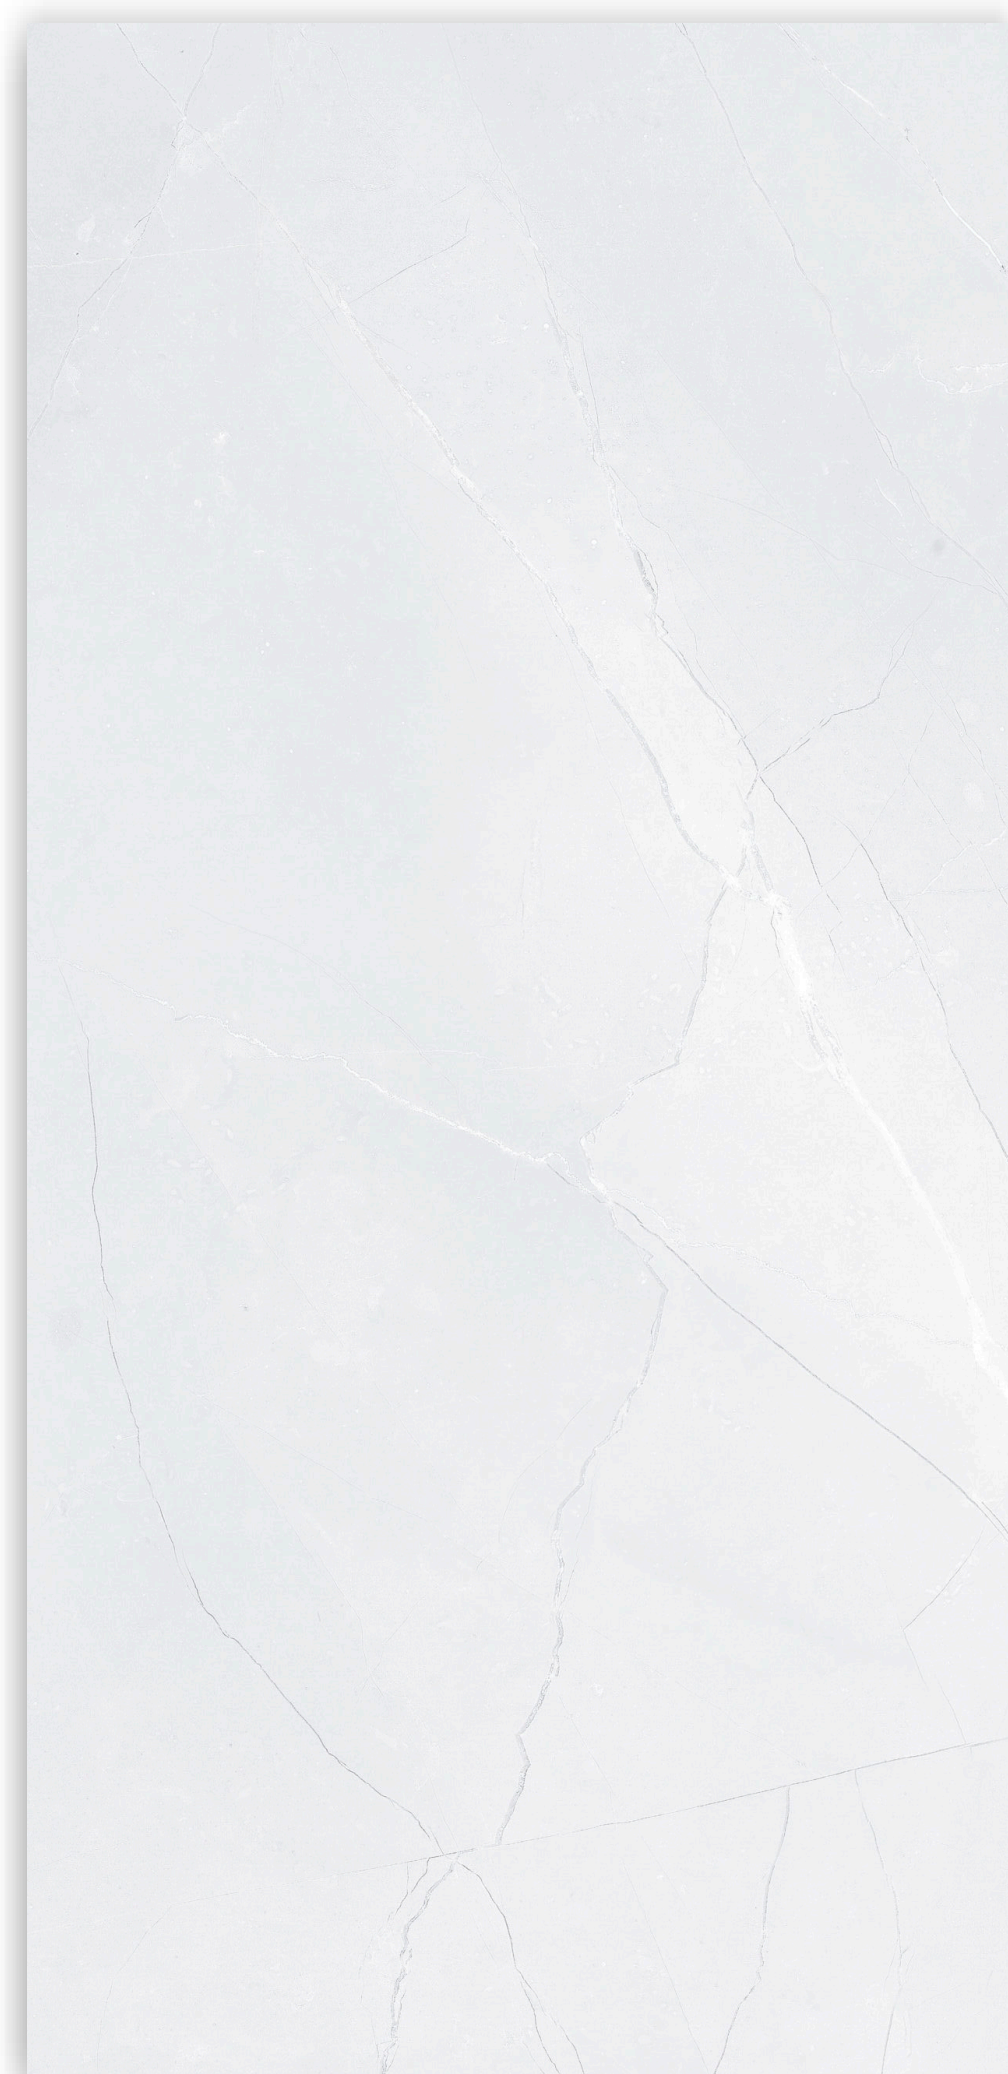

CH01260664  
60x120 cm



CH01260666  
90x90 cm








# SAND

---

Thickness: 9 mm

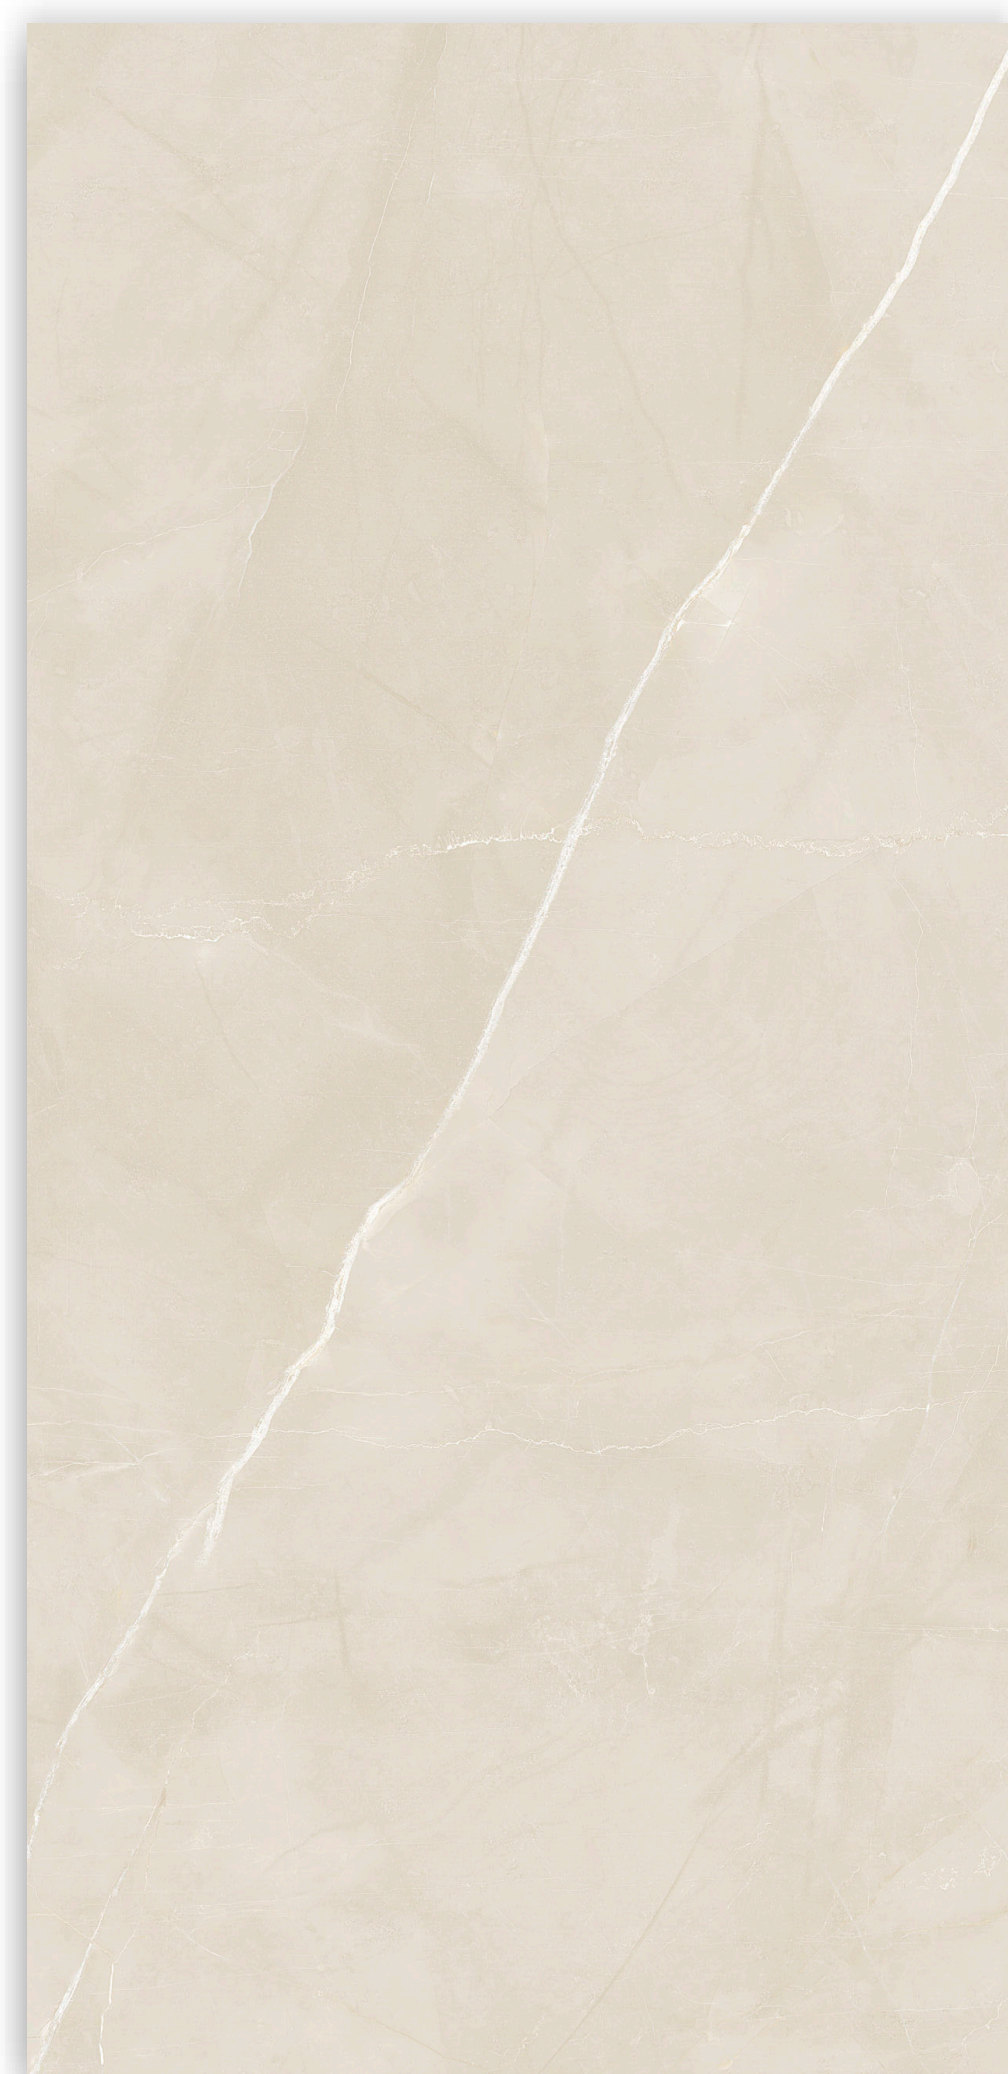

CH01260665  
60x120 cm



CH01260668  
90x90 cm







# GREY

---

Thickness: 9 mm



CH01260665  
60x120 cm



CH01260668  
90x90 cm







# TECHNICAL DATA

Ref : PULPIS - Data Sheet

DRY PRESSED PORCALIN TILES WITH WATER ABSORPTION LESS THAN 0.5%

| Standard               | Features                            | Required Value | Value             |
|------------------------|-------------------------------------|----------------|-------------------|
| EN-ISO 10545 / 2       | Length and width                    | Required       | ± 0,4 mm ± 0,05 % |
| EN-ISO 10545 / 2       | Thickness                           | Required       | ± 0,3 mm ± 3,0 %  |
| EN-ISO 10545 / 2       | strength of sides                   | Required       | ± 0,5 mm ± 0,1 %  |
| EN-ISO 10545 / 2       | ORTHOGONALITY                       | Required       | ± 0,8 mm ± 0,1 %  |
| EN-ISO 10545 / 2       | surface fitness                     | Required       | ± 1,7 mm ± 0,14%  |
| EN-ISO 10545 / 2       | Lateral curvature                   | Required       | ± 1,7 mm ± 0,14%  |
| EN-ISO 10545 / 2       | Warpage                             | Required       | ± 1,7 mm ± 0,14%  |
| EN-ISO 10545 / 4       | Breaking strength                   | Required       | ≥1300N            |
| EN-ISO 10545 / 4       | Modulus of rupture                  | Required       | 35 N/mm²          |
| UNE - EN - ISO 10545-9 | Thermal shock resistance            | Required       | Complies with     |
| UNE EN ISO 10545-12    | Durability; Freeze - thaw cycle     | Required       | Complies with     |
| EN-ISO 10545 / 11      | Crazing resistance                  | Required       | Complies with     |
| EN-ISO 10545 / 14      | Stain resistance                    | Required       | CLASS - 5         |
| UNE EN ISO 10545-13    | High concentration resistance Acids | Min. LB        | GHB               |





# Fanal

Kingdom of Saudi Arabia

Customer care. 8001222230

WhatsApp. +966112735290

E.Mail. [customer-care@marketing-home.com](mailto:customer-care@marketing-home.com)