



LED PRO

Simple and flexible solution to design modern light lines in professional and retail spaces

LED MAGNETIC ULTRA THIN LIGHT SERIES

PRODUCT INFORMATION

- Modern looking, neat luminaire offering comfortable, good quality lighting and can also work as a design element.
- Ideal lighting in the non-working areas of professional spaces such as offices, educational institutes, and also the welcoming areas and entrances of retail spaces.
- ILLUS LED MAGNETIC ULTRA THIN Light gives the customer the flexibility to choose between 24 models based on their specific need with lumen package from 450lm to 1630lm.

BENEFITS

- Clean and uniform light.
- Multiple application use.
- Easy to install and maintain.

FEATURES

- High CRI>95.
- Efficacy up to 95lm/w.
- Long life span 30,000 hrs.
- Operating voltage DC48V.
- Non – dimmable.



**BEYOND LIGHT..
TO THE LAST DETAILS!**

AREAS OF APPLICATION



Hospitality



Shopping Center



Commercial



Educational Center


TECHNICAL OPERATING & ELECTRICAL DATA

IP Ratings	IP20
CRI	>95
Body Color	White
Body Material	Aluminum
Ambient Temperature	-20°C~45°C
Operating Voltage	DC48V
Dimming	Non-Dimmable
Directional or Non Directional	Directional
Fixed or Adjustable	Fixed
Life Span	30000h
Switching Cycle	15000


SPECIFICATIONS

Code No.	Model No.	Power	Lumen	Efficacy	CCT	Beam Angle
LI614800	ILS9.5MSL930WWB02	9.5W	660lm	69.47lm/W	3000K	24°
LI614801	ILS9.5MSL940NWB02	9.5W	680lm	71.58lm/W	4000K	24°
LI614861	ILS9.5MSL965DLB02	9.5W	710lm	74.74lm/W	6500K	24°
LI614802	ILS13MSL930WWB02	13W	950lm	73.08lm/W	3000K	24°
LI614803	ILS13MSL940NWB02	13W	1000lm	76.92lm/W	4000K	24°
LI614862	ILS13MSL965DLB02	13W	1070lm	82.31lm/W	6500K	24°
LI614804	ILS17MSL930WWB02	17W	1250lm	73.53lm/W	3000K	24°
LI614805	ILS17MSL940NWB02	17W	1320lm	77.65lm/W	4000K	24°
LI614863	ILS17MSL965DLB02	17W	1400lm	82.35lm/W	6500K	24°
LI614806	ILS10MLL930WWB02	10W	800lm	80lm/W	3000K	110°
LI614807	ILS10MLL940NWB02	10W	820lm	82lm/W	4000K	110°
LI614864	ILS10MLL965DLB02	10W	850lm	85lm/W	6500K	110°
LI614808	ILS13MLL930WWB02	13W	1100lm	84.62lm/W	3000K	110°
LI614809	ILS13MLL940NWB02	13W	1150lm	88.46lm/W	4000K	110°
LI614865	ILS13MLL965DLB02	13W	1230lm	94.62lm/W	6500K	110°
LI614810	ILS17.5MLL930WWB02	17.5W	1480lm	84.57lm/W	3000K	110°
LI614811	ILS17.5MLL940NWB02	17.5W	1550lm	88.57lm/W	4000K	110°
LI614866	ILS17.5MLL965DLB02	17.5W	1630lm	93.14lm/W	6500K	110°
LI614812	ILS6MTL930WWB02	6W	450lm	75lm/W	3000K	36°
LI614813	ILS6MTL940NWB02	6W	470lm	78.33lm/W	4000K	36°
LI614867	ILS6MTL965DLB02	6W	500lm	83.33lm/W	6500K	36°
LI614814	ILS9.5AMSL930WWB02	9.5W	690lm	72.63lm/W	3000K	24°
LI614815	ILS9.5AMSL940NWB02	9.5W	720lm	75.79lm/W	4000K	24°
LI614868	ILS9.5AMSL965DLB02	9.5W	750lm	78.95lm/W	6500K	24°


DIMENSIONS

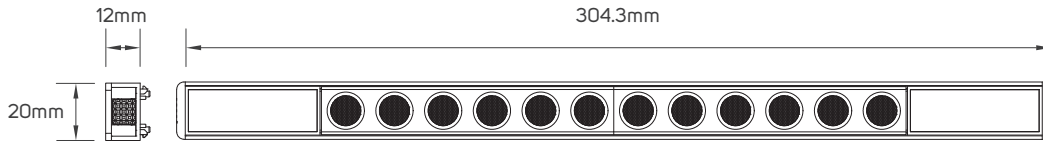


LI614800 - LI614801 - LI614861

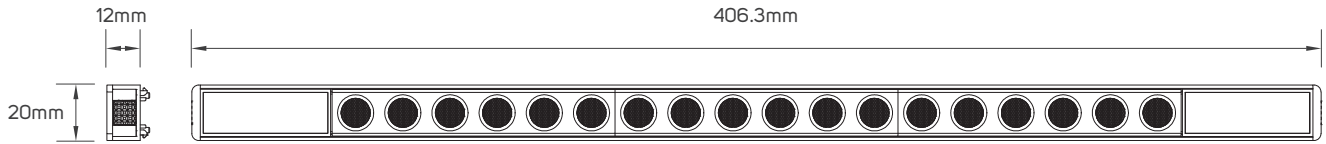

LI614802 - LI614803 - LI614862

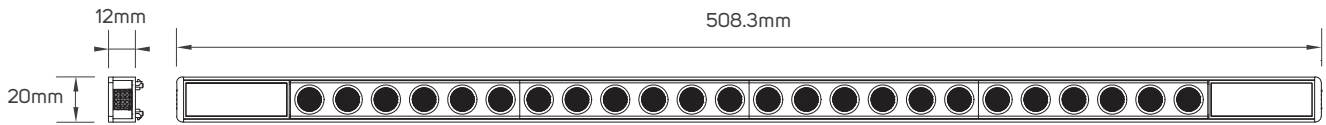

LI614804 - LI614805 - LI614863

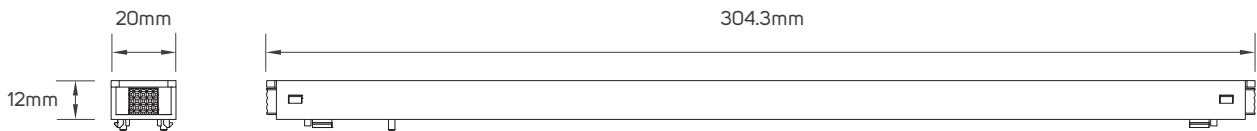

LI614806 - LI614807 - LI614864




LI614808 - LI614809 - LI614865




LI614810 - LI614811 - LI614866

DIMENSIONS

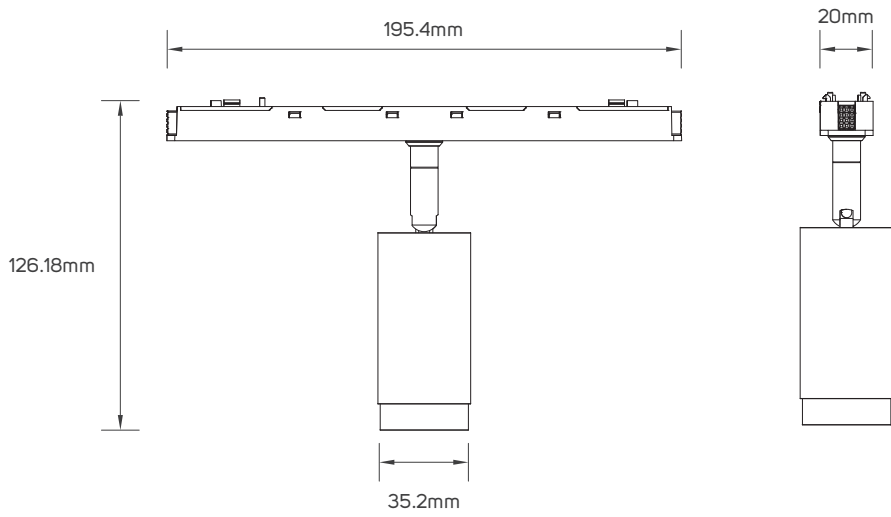

LI614812 - LI614813 - LI614867

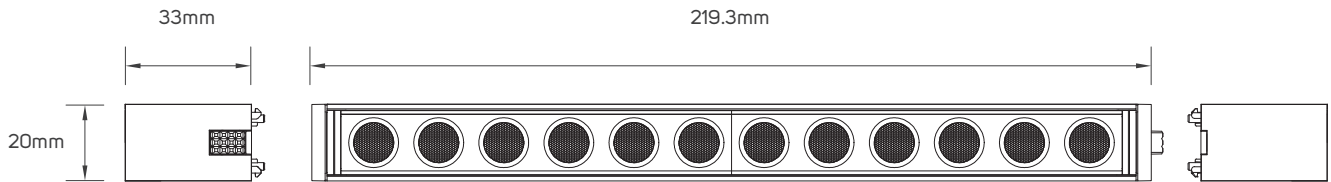


LI614814 - LI614815 - LI614816 - LI614868


ACCESSORIES

Code No.	Model No.	Body Color	Body Material
LI614817	ILSEMSMTL500B02	White	Aluminum
LI614818	ILSEMSMTL1000B02	White	Aluminum
LI614819	ILSEMSMTL1500B02	White	Aluminum
LI614820	ILSRMSMTL500B02	White	Aluminum
LI614821	ILSRMSMTL1000B02	White	Aluminum
LI614822	ILSRMSMTL1500B02	White	Aluminum
LI614823	ILSSMMSMTL500B02	White	Aluminum
LI614824	ILSSMMSMTL1000B02	White	Aluminum
LI614825	ILSSMMSMTL1500B02	White	Aluminum
LI614826	ILSUTMSMTL500B02	White	Aluminum
LI614827	ILSUTMSMTL1000B02	White	Aluminum
LI614828	ILSUTMSMTL1500B02	White	Aluminum
LI614829	ILSIMSMTLW02	White	Aluminum
LI614830	ILSLMSMTLW02	White	Aluminum
LI614831	ILSTMSMTLB02	White	Aluminum
LI614832	ILS7MSMTLW02	White	Aluminum
LI614833	ILSIMSMTLB03	White	Aluminum
LI614834	ILSLMSMTLB03	White	Aluminum
LI614835	ILS7MSMTLB03	White	Aluminum


ACCESSORIES DIMENSIONS

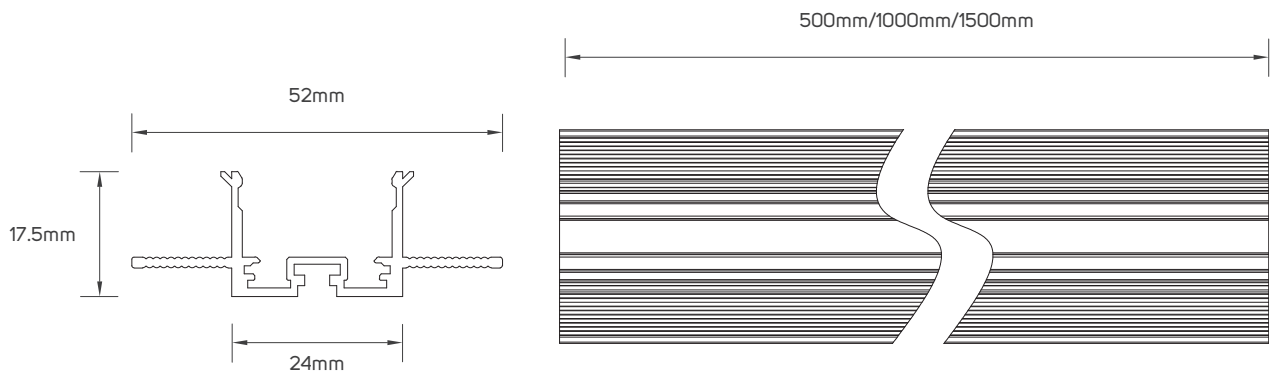


LI614817 - LI614818 - LI614819

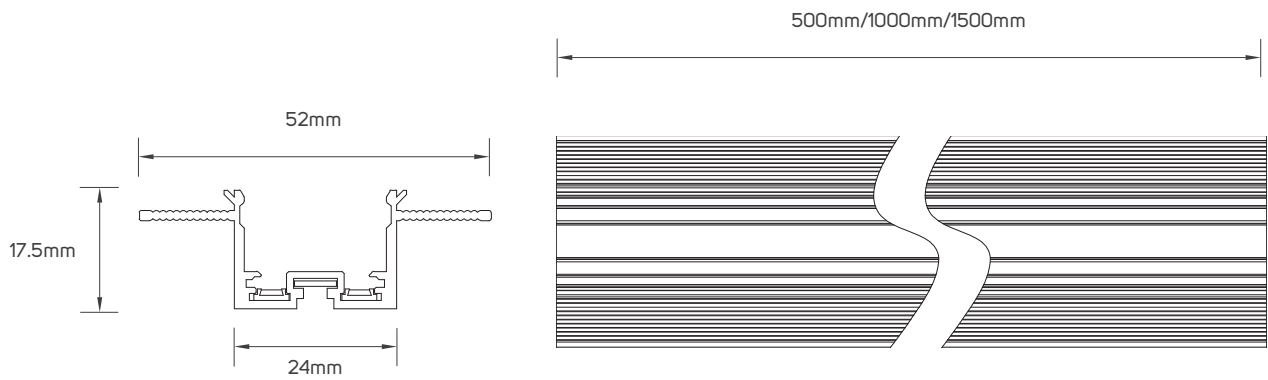

LI614820 - LI614821 - LI614822

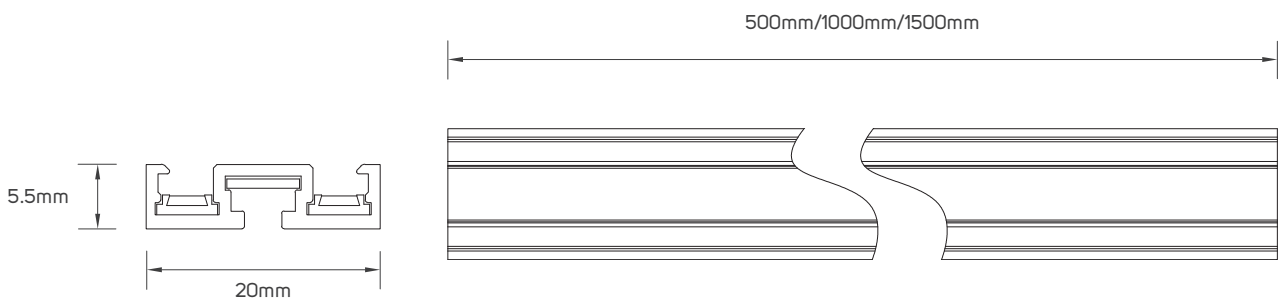


LI614823 - LI614824 - LI614825

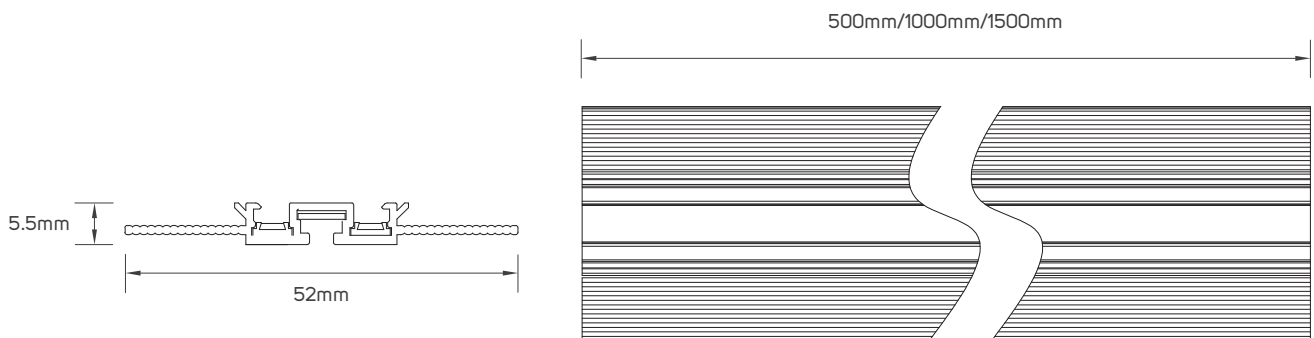


LI614826 - LI614827 - LI614828

ACCESSORIES DIMENSIONS

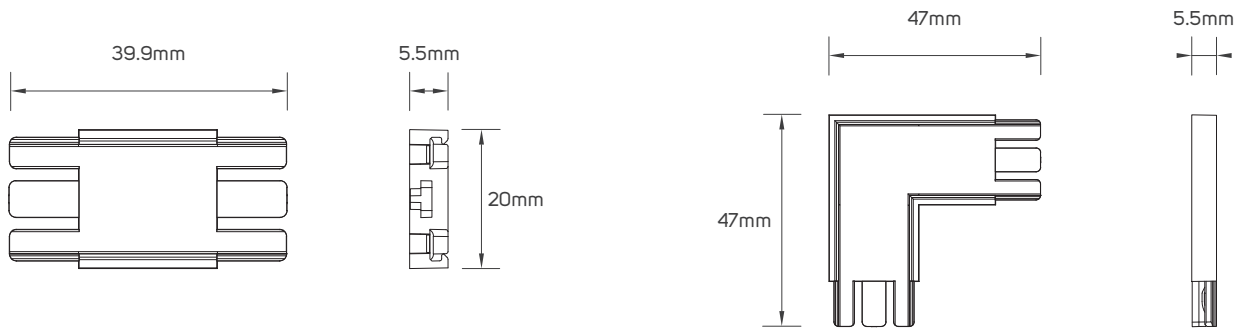


LI614829

LI614830

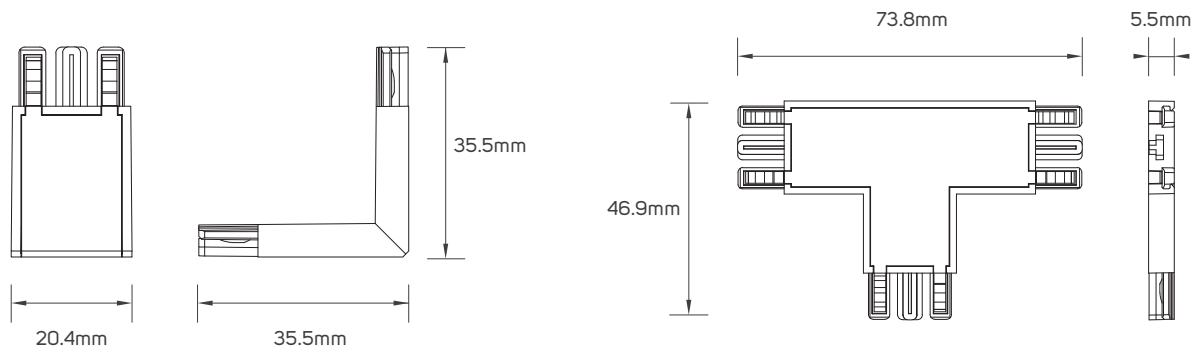


LI61831

LI614832

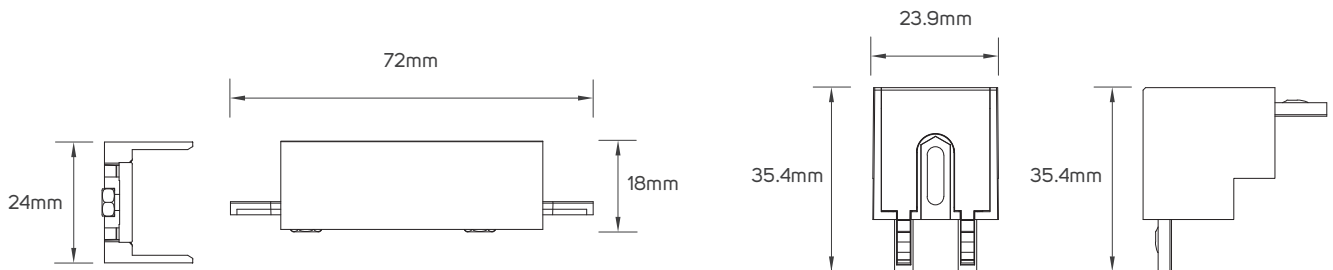

LI614833

LI614834

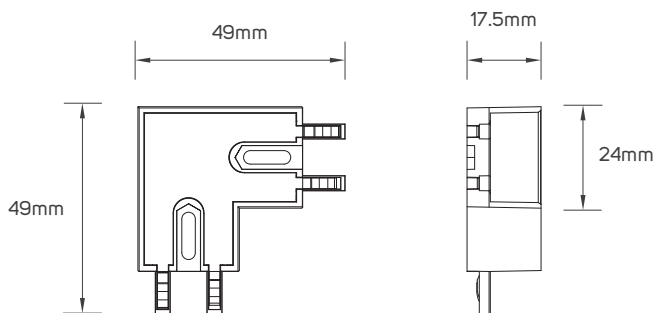

LI614835

APPLICATION PICTURE



LED MAGNETIC ULTRA THIN LIGHT SERIES

**BEYOND LIGHT..
TO THE LAST DETAILS!**



C/ Cuenca, 87, Alaquas 46970, (Valencia) Spain, Ph. 34 961 623 958

www.illusillumination.com

illus illumination reserve the right to make dimensional, design and technical alternations without prior notice. illus illumination endeavor to ensure that any advice, recommendation or information it provides in product literature is accurate and correct. However due to the fact that illus do not have direct control on where and how the products are installed, illus illumination cannot accept any liability either direct or indirect arising from the use of illus products whether or not in accordance with any advice, specification, recommendation or information provided by illus illumination or its distributors.