



Make your boundaries **Stand Out**

LED SURFACE-MOUNTED LUMINAIRE WALL

PRODUCT INFORMATION

- Surface mounted, exterior- rated and compact sized architectural LED edge lighting luminaire that is designed for façade and outdoor decorative lighting applications.
- Ideal for edges lighting on windows and doors inner frames, building façades, landmarks and monuments.
- ILLUS LED SURFACE MOUNTED Luminaire (WALL) gives the customer the flexibility to choose between 7 models based on their specific need.

BENEFITS

- Unique optical distribution to highlight the inner frame or outer edges of windows, balconies or doors.
- Compact size.
- Light weight.

FEATURES

- High CRI>80.
- Operating voltage AC220 – 240 V.
- Non – dimmable.

AREAS OF APPLICATION



Industrial



Garden



Commercial


TECHNICAL OPERATING & ELECTRICAL DATA

Input Voltage & Frequency	AC220-240V, 50/60Hz
Rated CRI	80
Color Temperature	3000K
Life Span	30,000H
Dimming	Non-Dimmable
IEC Classification	Class I
Ambient Temperature	-25°C~45°C
Switching Cycle	15000X on/off


SPECIFICATIONS

Code No.	Model No.	Power	Body Color	Body Material	IP Rating	Lumen
541115	ILS4.5WLWW02	4.5	Dark Gray	Aluminum	IP65	874lm
541133	ILS3.5SMOWLF01	3.5	Dark Gray	Aluminum	IP65	54lm
541134	ILS07SMOWLF01	6	Dark Gray	Aluminum	IP65	272lm
541151	ILS13SMOWLF01	13	Dark Gray	Aluminum	IP65	913lm
541152	ILS13SMOWLF02	13.5	Dark Gray	Aluminum	IP44	913lm
541155	ILS13SMOWLF03	13	Dark Gray	Aluminum	IP65	753lm
541156	ILS13SMOWLF04	13.5	Dark Gray	Aluminum	IP44	753lm


| DIMENSIONS

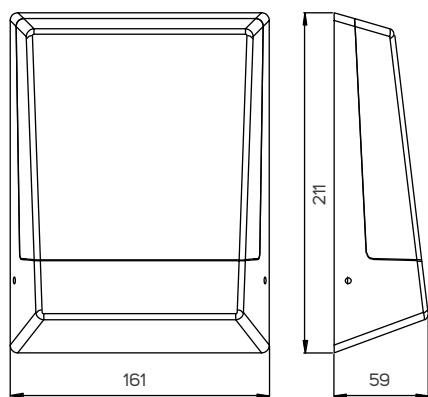


541115

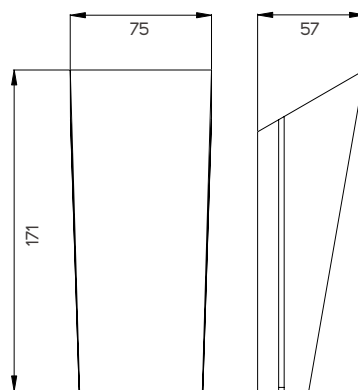


541133

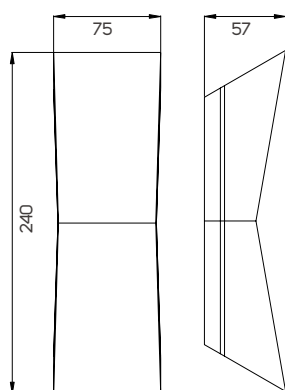

541134

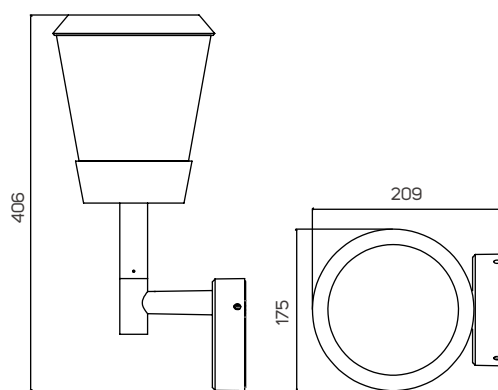

541151, 541152

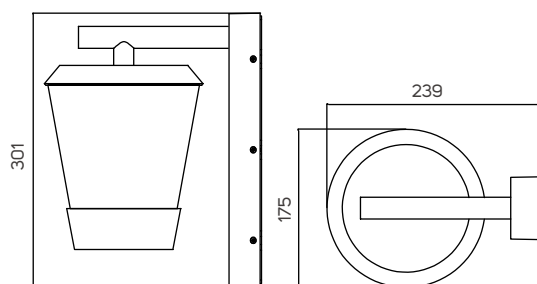

541155, 541156



LED SURFACE-MOUNTED LUMINAIRE WALL



**BEYOND LIGHT..
TO THE LAST DETAILS!**