

30W DALI + PUSH Dimming power supply



Features

- For luminaires of protection Class I, II, SELV, Built-in/Independent (With side caps)
- Input Voltage 220-240VAC
- Protections: SCP/OLP/OVP/OTP
- Power Factor :0.97
- Efficiency :87%
- Support DALI-2,Push Dimming
- 5 years warranty

Applications


- LED panel、Spot light、Down light

◆ Description

FLS-30-700 DALI-2 LD ECO is a 30W constant current LED driver with 150 to 700mA output current and a forward voltage range from 24 to 42VDC. The output current is adjustable by DIP Switch. With it's dimensions from 97 x 43 x 30 mm. It is easy to integrate in LED panel, spot and down light products. To ensure trouble-free operation, protection is provided against output short circuit and over Load.

◆ Model code

FLS-30-700 DALI-2 LD ECO

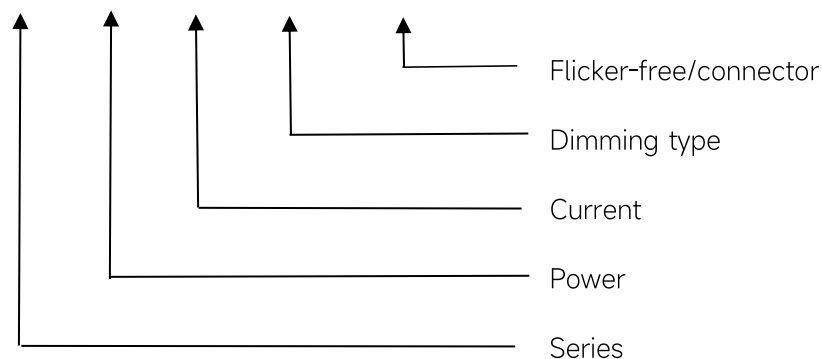

◆ Specification

Output	Constant Current (mA)	150	200	250	300	350	400	450	500	550	600	650	700
	Voltage Range	24-42VDC											
	Unload voltage Max.	59VDC											
	Current Accuracy	±8%		±7%		±5%							
	Output HF current ripple(≥1KHz)	±5%											
	Output LF current ripple(≤120Hz)	±3%											
	SVM	≤0.01@Full Load											
	P _{st}	≤0.05@Full Load											
	Efficiency(Typ.)	≥87%@Full Load, 230VAC											
Input	Rated input voltage	220-240VAC											
	Range of input voltage	198-264VAC											
	Rated input voltage(DC)	198-280VDC											
	Frequency(Hz)	0/50/60 Hz											
	Displacement factor	≥0.9											
	Power Factor	0.97@220-240VAC, full load											
	Input Current	0.25A max.											
	Start-up time	< 0.5S											
	No Load Power	≤0.5W											
	Standby Power	≤0.5W											
	Network standby power	≤0.5W											
	THD	≤6%@230V, Full Load											
Dimming	Dimming	YES											
	Dimming mode	DALI-2 (IEC 62386-101,102,207) & Push											
	Dimming depth	1%											
	Dimming current range	1 ~100%											
Protection	Over Load Protection	103-120%											
		YES/Latch off											
	Over Voltage Protection	> 59VDC											
		YES/Latch off											
	Short circuit Protection	YES/Latch off											
Over Temperature Protection	YES/Auto Resume												
Environment	Operating Temperature	-20°C~-+50°C											
	Humidity	20%-90%RH											
	Tc	80°C											
	Storage Temperature	-40°C~-+80°C											
	Lifetime	>50000h,@Tc=75°C											
Surface	Dimension	97X43X30mm (With side caps :131X43X30mm)											


standards	EN 61347-1; EN61347-2-13; EN62384; EN55015; EN61000-3-2 ; EN61000-3-3; EN 61547;		
Others	ErP	EU 2019/2020	
	RoHS	RoHS (2011/65/EU) (EU)2015/863	
Note	1.All parameters NOT specially mentioned are measured at 230VAC input , full load and 25°C of ambient temperature. 2.Ripple & Noise are measured at 20MHz of bandwidth by using a 300mm twisted pair-wire terminated with a 0.1uF & 47 uF parallel capacitor. 3.Output current can be from 150mA to 700mA. Please see Model list below and contact EAGLERISE for details. 4.The DC input for this product is only used for emergency lighting and applies to functional and safety requirements, EMC is not		

◆ Parameter

Number	Output				Switch position			
	Current (mA)	Voltage (VDC)	Voltage No load (VDC)	Power (W)	1	2	3	4
1	150mA	24-42VDC	59	6.3	--	--	ON	--
2	200mA	24-42VDC	59	8.4	ON	--	ON	--
3	250mA	24-42VDC	59	10.5	--	ON	ON	--
4	300mA	24-42VDC	59	12.6	ON	ON	ON	--
5	350mA	24-42VDC	59	14.7	--	--	--	ON
6	400mA	24-42VDC	59	16.8	ON	--	--	ON
7	450mA	24-42VDC	59	18.9	--	ON	--	ON
8	500mA	24-42VDC	59	21	ON	ON	--	ON
9	550mA	24-42VDC	59	23.1	--	--	ON	ON
10	600mA	24-42VDC	59	25.2	ON	--	ON	ON
11	650mA	24-42VDC	59	27.3	--	ON	ON	ON
*12	700mA	24-42VDC	59	29.4	ON	ON	ON	ON


* Factory default

◆ Wiring diagram


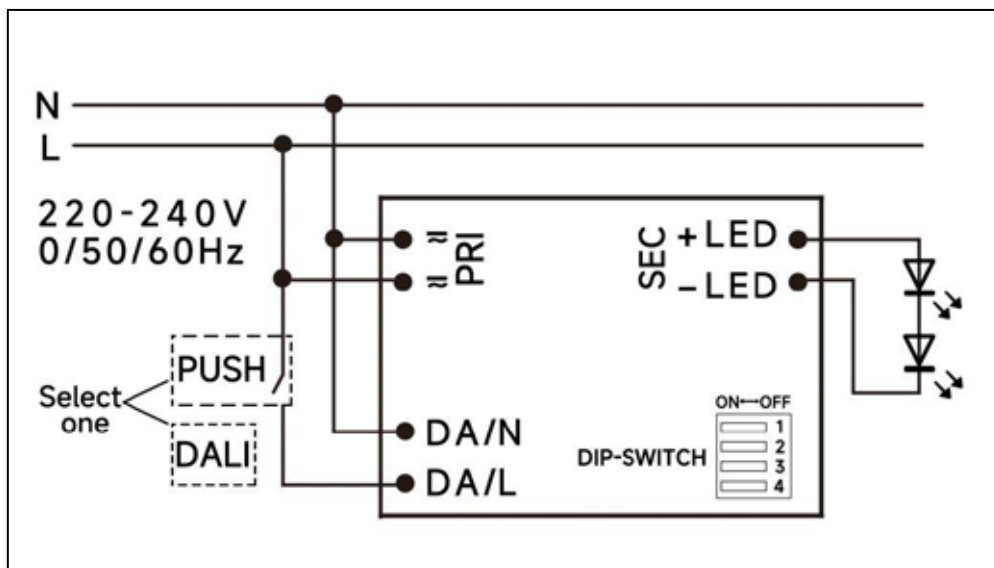


◆ 2D diagram

Without side caps

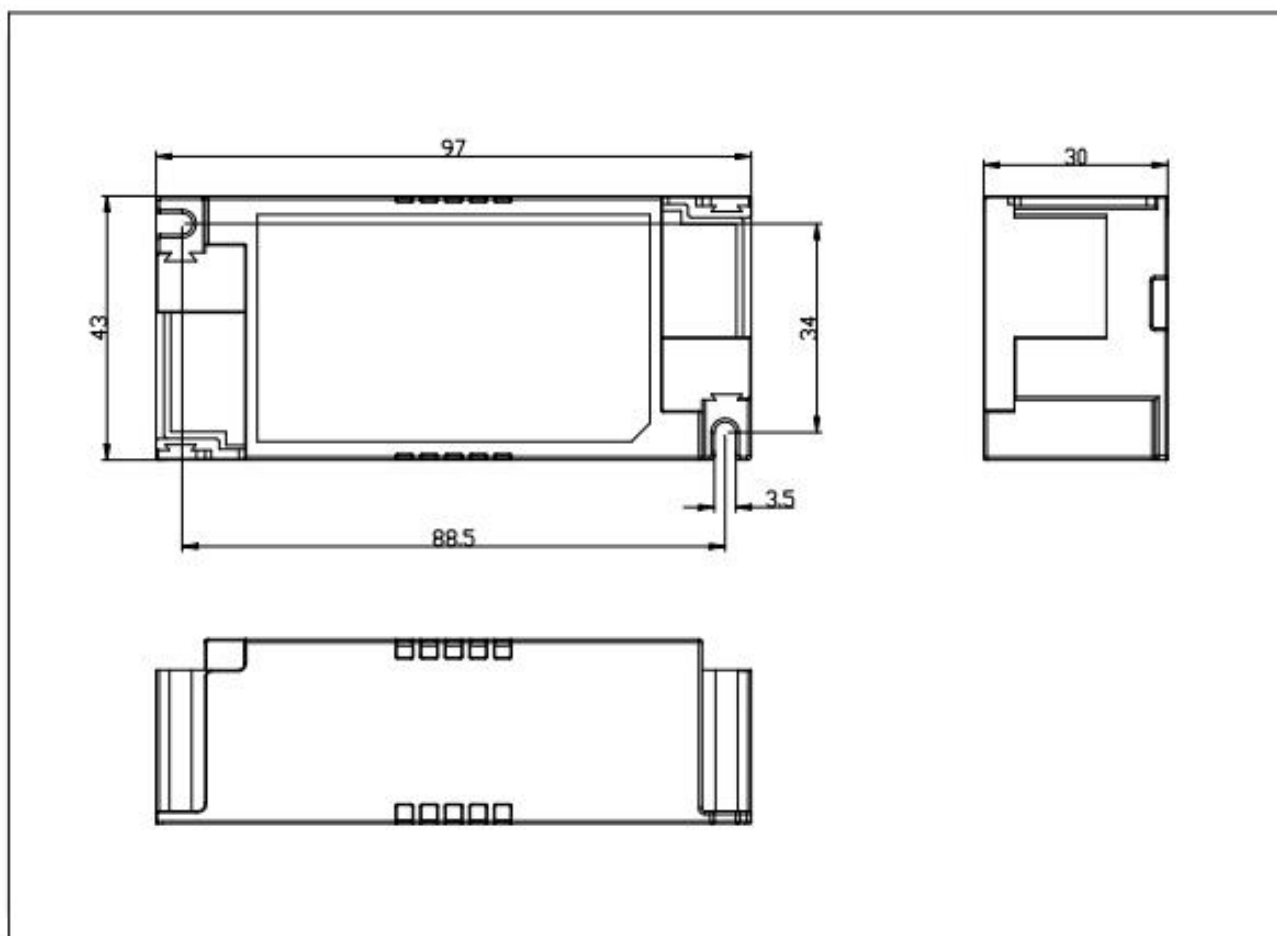

With side caps

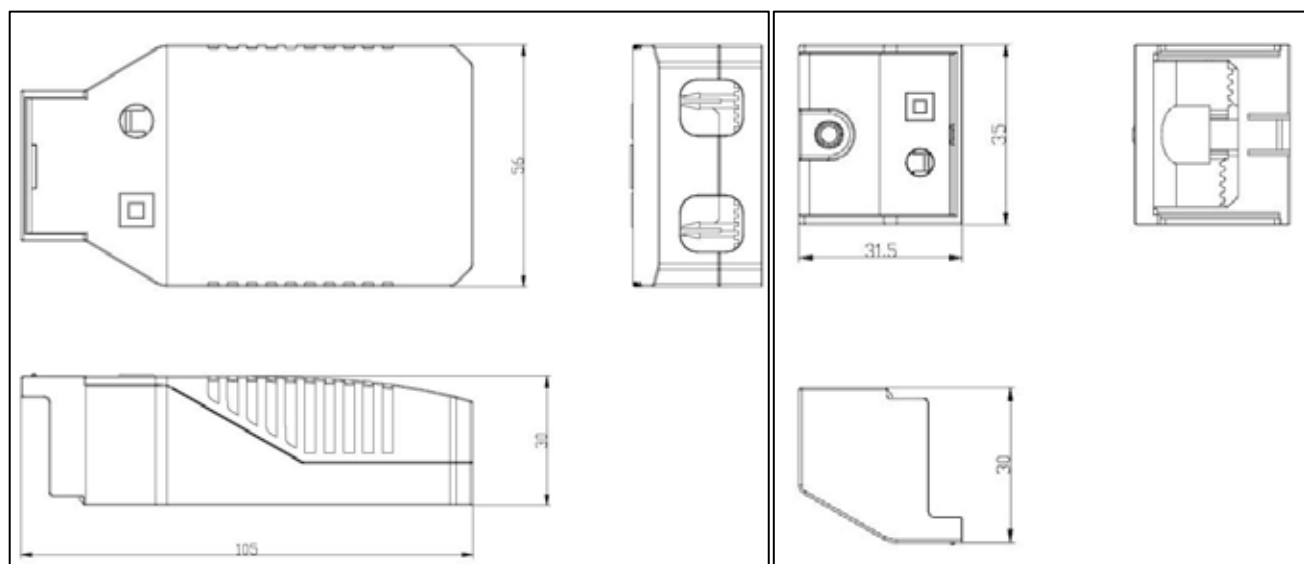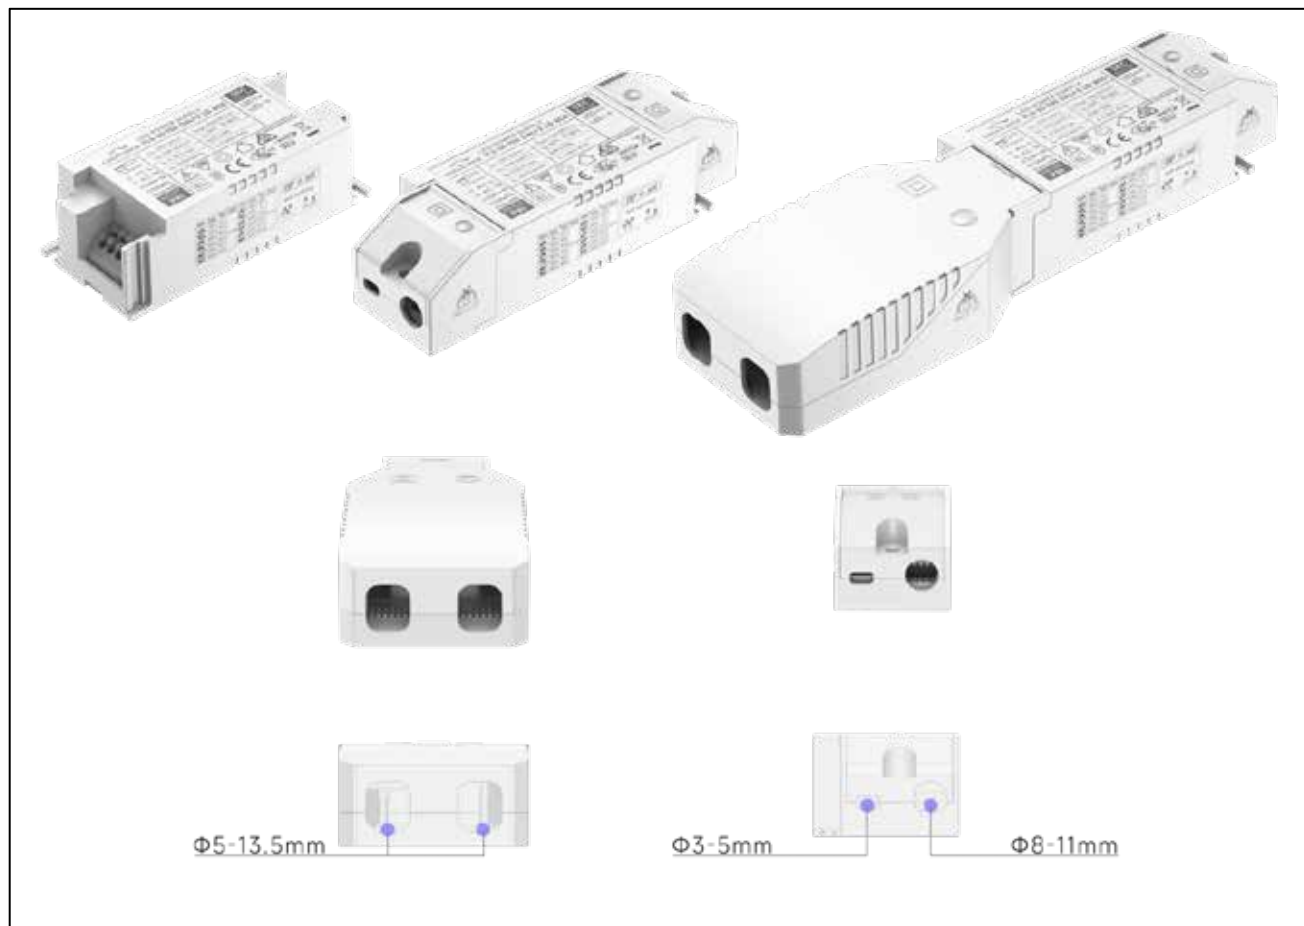

A caps

B caps



Top end caps coding: 132021T0079-1
 Bottom end caps coding: 132021T0033
 Strain relief coding: 132038T0046
 Terminal coding: 126016T0009



Top end caps coding: 132021T0080-1
 Bottom end caps coding: 132021T0035

◆ Wiring & Connections


Specification item		Value (Unit)
Input	Input wire cross-section	0.5...1.5 mm ² (With A side caps: 0.75...2.5 mm ²)
	Input wire gauge.	16...20 AWG (With A side caps: 14...20 AWG)
	Input wire strip length	7...9mm
Output	Output wire cross-section	0.5...1.5 mm ²
	Output wire gauge.	16...20 AWG
	Output wire strip length	7...9mm

Common ways of wire clamping:


1. Tighten the screws to secure the side cover or clips, to clamp the cables
2. Through the main shell and side cover side teeth to clamp the cables

◆ Curve for FLS-30-700 DALI-2 LD ECO, $I_o=700\text{mA}$


Lifetime vs. Ambient Temperature Curve

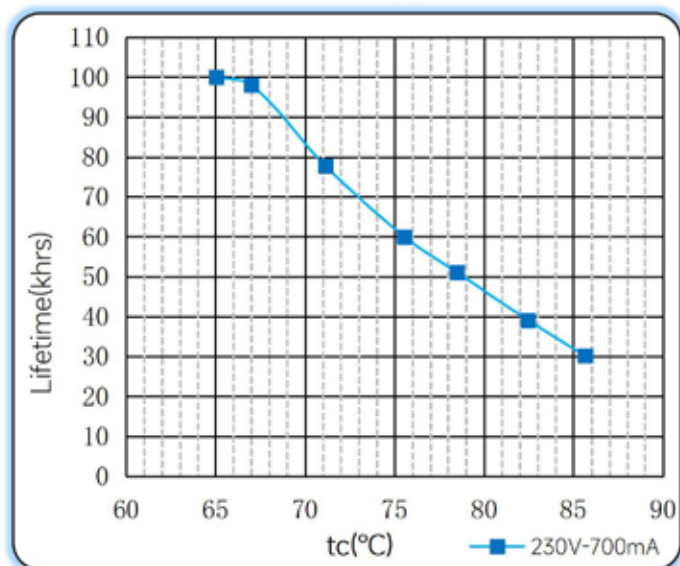


Efficiency vs. Load

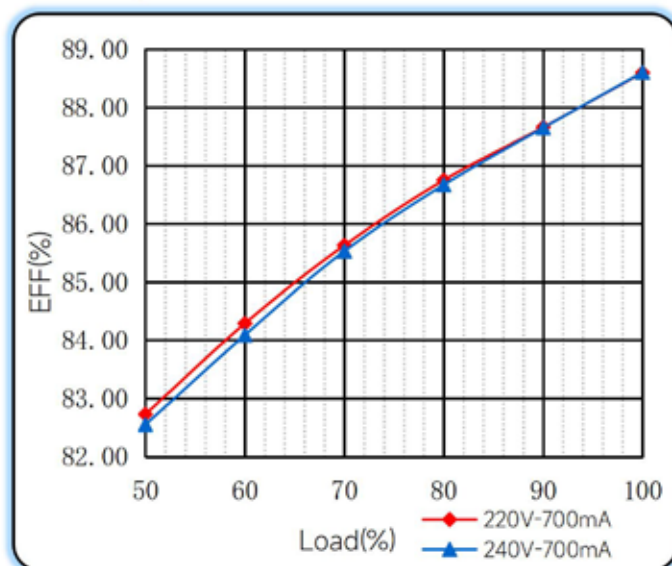


Power Factor Characteristics

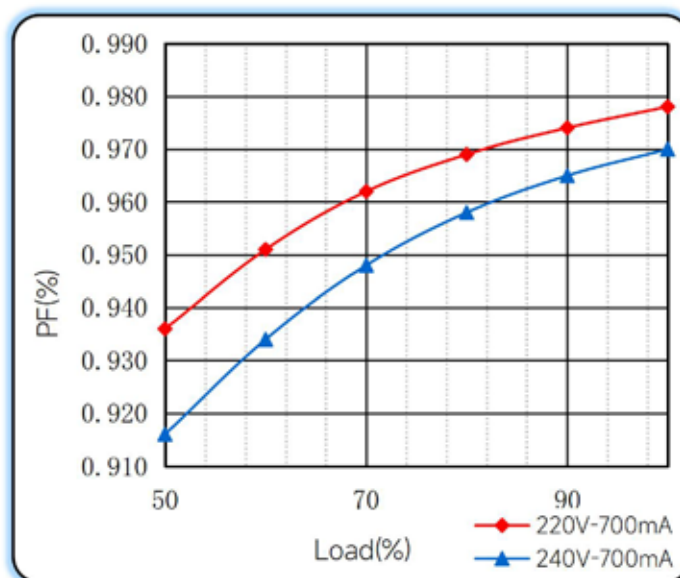

THD vs. Load

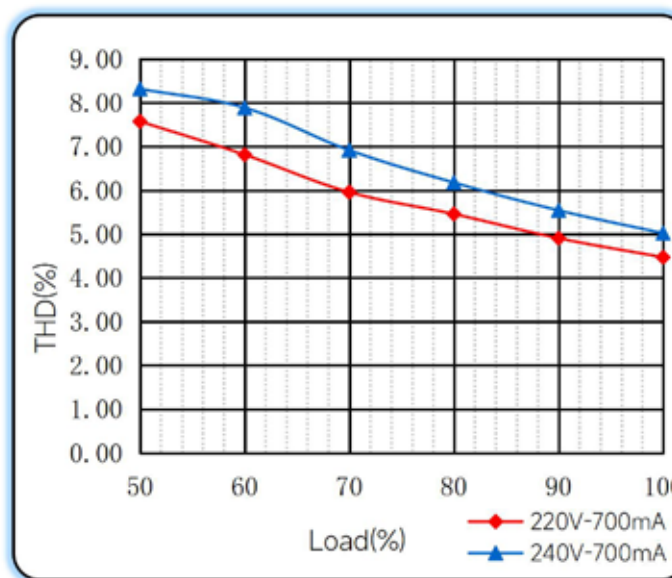

◆ Operating window

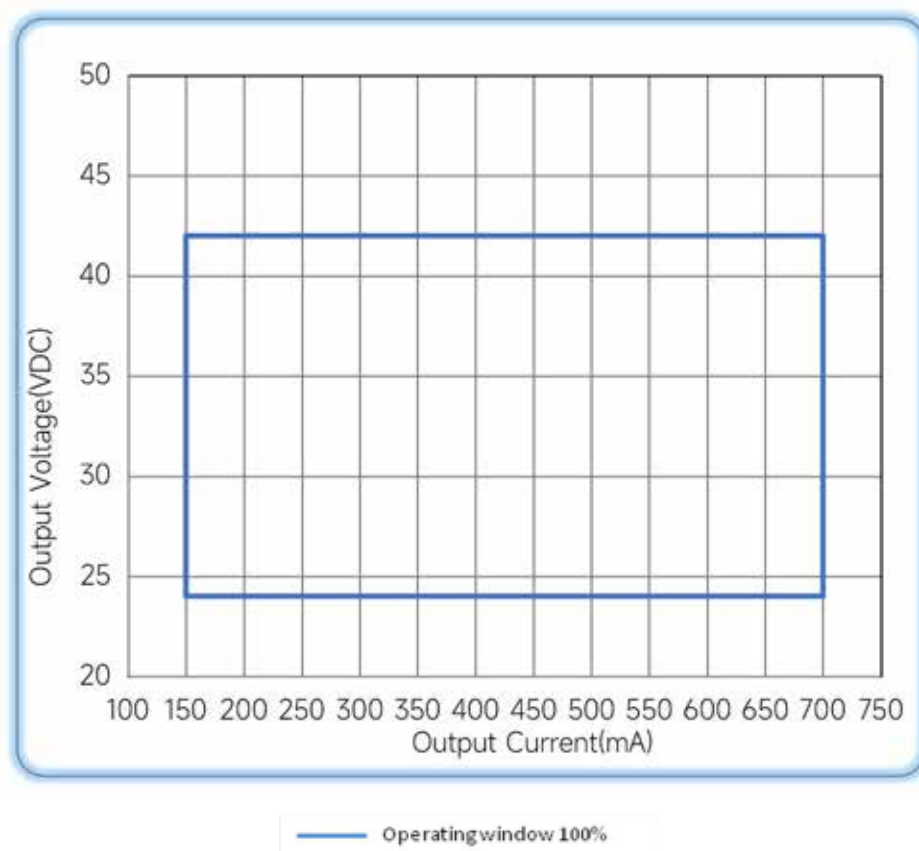

◆ Revision Updates

ITEM	BEFORE	AFTER	VERSION	DATE
Initial			A	2022/05/10