

L≢ PRO

Power your outdoor lighting by solar energy

LED SOLAR SURFACE-MOUNTED LUMINAIRE (WALL)

PRODUCT INFORMATION

- Ideal solution for municipalities who seek to meet their sustainability goals.
- Compact luminaire using high-quality materials is easy to dismantle and recycle at the end of its lifetime.
- ILLUS LED SOLAR SURFACE MOUNTED Luminaire (wall) gives the customer the flexibility to choose between 2 models based on their specific need with lumen package from 250lm to 350lm.

BENEFITS

- Brings light to areas without access to electric grid.
- Saves energy.
- Environment friendly.

FEATURES

- High CRI80.
- Efficacy up to 78lm/w.
- Long lifespan 35000H.
- Great Impact Rating value.



AREAS OF APPLICATION







Shopping Center



Garden





Commercial






I TECHNICAL OPERATING & ELECTRICAL DATA


IP Rating	IP65
CRI	80
Body Color	Black
Body Material	Aluminum+PC
Voltage	5V
Mounting Type	Wall Mounted
Ambient Temperature	-20°C~40°C
Dimming	Non-Dimmable
IK Rating	IK08
Solar Panel Type	Mono Crystalline Silicon
Charging Time	6-8 Hours
Working Time	12 Hours
IEC Classification	Class III
Warranty Period	36 Months

SPECIFICATIONS

Code No.	Model No.	Power	Lumen	CCT	Beam Angle	Battery Life
614214	ILS4.5WS0WML3040B01	4.5W	350lm	3000K-4000K	120°	LiFEP04, 3.2V/6000mAH
614215	ILS4.5WS0WML3040B02	4.5W	250lm	3000K-4000K	180°	LiFEP04, 3.2V/8000mAH

DIMENSIONS






614214 614215

ACCESSORY


Code No.	Model No.	Body Color	Body Material	Fixed or Adjustable
614217	ILS74TUBS001	black	aluminum+PC	Fixed

ACCESSORY DIMENSIONS



614217 - Tube

APPLICATION PICTURE

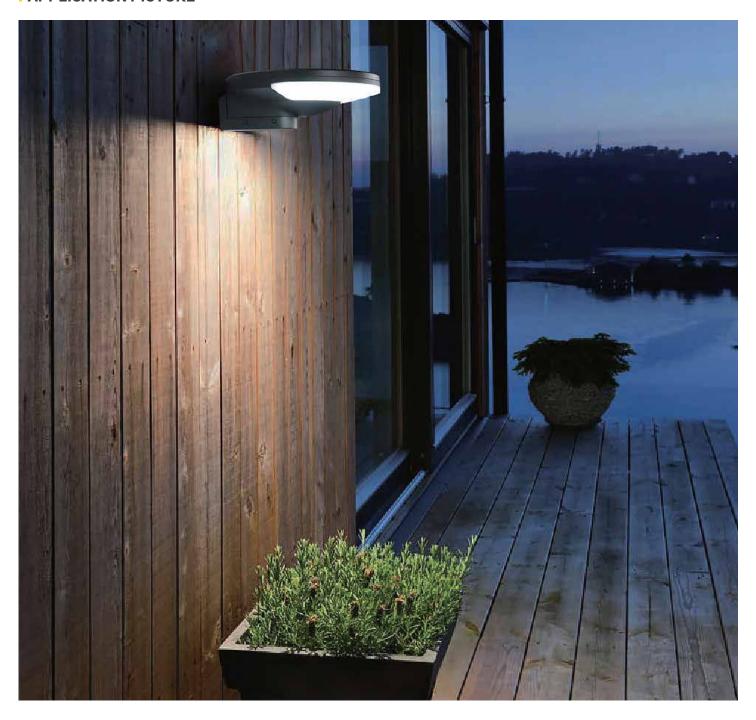

LED SOLAR SURFACE-MOUNTED LUMINAIRE (WALL)

BEYOND LIGHT..
TO THE LAST DETAILS!

