

Simple & Flexible Solution

LED FLEXIBLE LINEAR LIGHT

PRODUCT INFORMATION

- Excellently waterproof and anti-dust LED strips with professional design to guarantee lighting performance.
- It not only ensure high quality of lighting color consistency but also protect products outdoor against from harsh environments outdoors.

BENEFITS

- Water proof and vivid light color.
- Less maintenance cost and less concerns on water invasion.

FEATURES

- High CRI>92.
- Operating voltage DC226V.



AREAS OF APPLICATION





Hospitality

Shopping Center





Commercial

Educational Center


I TECHNICAL OPERATING & ELECTRICAL DATA

| IP65, PVC anti-UV | | |
|---|--|--|
| 8W/M | | |
| 60pcs/meter | | |
| 450lm/M+/-10% | | |
| Single PCB whole thickness 0.15mm, white color, 10mm, copper thickness 25ur | | |
| 5.0x5.0x1.2mm | | |
| 30000H | | |
| DC226V | | |
| 0.15mm x 18pcs | | |
| 40M / Reel | | |
| 1 meter | | |
| 18x8mm | | |
| Each roll without controller (sold separately) | | |
| | | |

SPECIFICATIONS

| Code No. | Model No. | Lumen | CRI | CCT |
|----------|--------------------|-------|-----|-------------|
| 611849 | ILS08HVST92250TN01 | 450lm | 92 | 2200K/5000K |

DIMENSIONS




611849


ACCESSORIES LED FLEXIBLE LINEAR LIGHT CONNECTOR AVAILABLE AS AN ACCESSORY

| Code No. | Model No. | IP | Power | Input | Output | Frequency | Dimensions |
|----------|-----------------|----|-------|------------|--------|-----------|--------------|
| 611938 | ILSHVST2H3PC02 | | | | | | L=200mm |
| 611975 | ILSHVST2H3PC01 | | | | | | L=300mm |
| 611940 | ILSHVRFCCTCD01 | 65 | 361W | DC226V | DC226V | 50/60Hz | 35x88.5x33mm |
| 611929 | ILS250HVFLLCG02 | 65 | 248W | AC220-240V | DC226V | 50/60Hz | 42x146x33mm |
| 611930 | ILS400HVFLLCG02 | 65 | 361W | AC220-240V | DC226V | 50/60Hz | 42x146x33mm |

ACCESSORIES DIMENSIONS

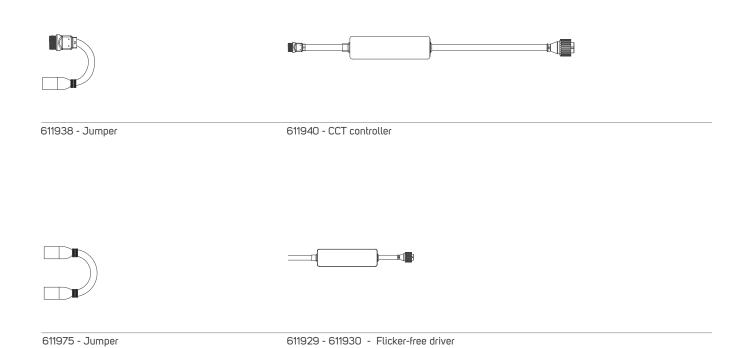

APPLICATION PICTURE

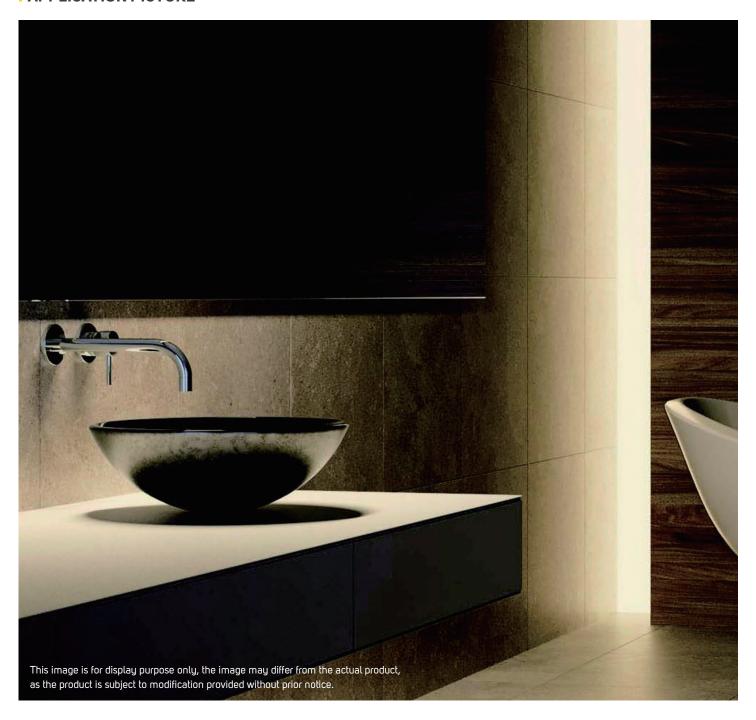

LED FLEXIBLE LINEAR LIGHT

BEYOND LIGHT..
TO THE LAST DETAILS!

