

Make your boundaries Stand Out

LED RECESSED WALL LUMINAIRE SERIES

PRODUCT INFORMATION

- Surface mounted, exterior-rated and compact sized architectural LED edge lighting luminaire that is designed for façade and outdoor decorative lighting applications.
- Ideal for edges lighting on windows and doors inner frames, building façades, landmarks and monuments.
- ILLUS LED RECESSED WALL Luminaire gives the customer the flexibility to choose between 2 models based on their specific need.

BENEFITS

- Unique optical distribution to highlight the inner frames or outer edges of windows, balconies or doors.
- Compact size.
- Light weight.
- Equipped with surge protection function.

FEATURES

- High CRI>80.
- Operating voltage AC220-240V.
- Non-Dimmable.
- Good Impact Rating.



AREAS OF APPLICATION





Hospitality

Shopping Center





Commercial

Educational Center




I TECHNICAL OPERATING & ELECTRICAL DATA

Body Material	Aluminum
IP Rating	IP65
Rated CRI	80
Voltage & Frequency	AC220-240V, 50/60Hz
IK Rating	IK08
Dimming	Non- Dimmable
IEC Classification	Class I
Ambient Temperature	-20°C~45°C
Surge Protection	1kV
Lifespan	50000H
Switching Cycle	15000x on/off
Warranty Period	60 Months


SPECIFICATIONS

Code No.	Model No.	Body Color	Power	Lumen	Efficacy	CCT	Beam Angle
612297	ILS3.5RMOWL01	Black+White	3.5W	6lm	1.71lm/W	3000K	5-6°
612298	ILS3.5RMOWL02	Black	3.5W	16lm	4.57lm/W	3000K	5-6°

DIMENSIONS



APPLICATION PICTURE

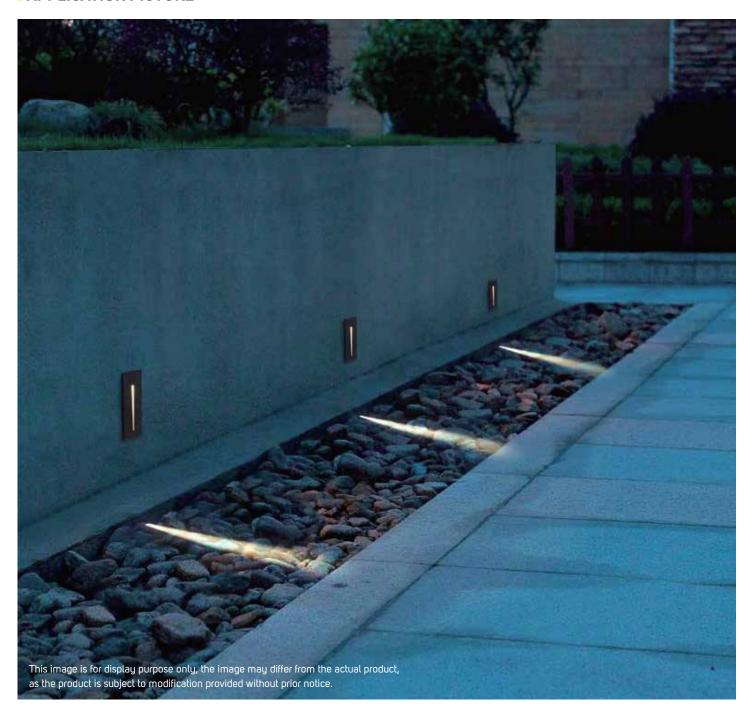

LED RECESSED WALL LUMINAIRE SERIES BEYOND LIGHT..
TO THE LAST DETAILS!

