

LED PRO

Simple & Flexible Solution

SLIM LED WALL GRAZER LUMINAIRE SERIES

PRODUCT INFORMATION

- Excellently anti-dust LED with professional design to guarantee lighting performance.
- This type of luminaire is suitable for high-end residential applications, museums, offices and hospitality projects.
- It not only ensures high quality of lighting color consistency but also protect products against from harsh environments.
- ILLUS SLIM LED WALL GRAZER Luminaire gives the customer the flexibility to choose between 3 models based on their specific need with lumen package from 300lm to 1200lm.

BENEFITS

- Vivid light color.
- Less maintenance cost and less concerns.
- Equipped with surge protection function.

FEATURES

- High CRI>85.
- Long lifespan 50000H.
- Operating voltage AC220-240V.
- Non-Dimmable.
- Good Impact Rating.



**BEYOND LIGHT..
TO THE LAST DETAILS!**

AREAS OF APPLICATION



Shopping Center



Commercial



Educational Center


TECHNICAL OPERATING & ELECTRICAL DATA

Body Color	Black
Body Material	Aluminum
Rated CRI	85
Voltage & Frequency	AC220-240V, 50/60Hz
IEC Classification	Class I
Dimming	Non- Dimmable
IP Rating	IP67
IK Rating	IK06
Ambient Temperature	-20C°~45C°
Beam Angle	20°*30°
Saving Energy	Energy Saving
Lifespan	50000H
Switching Cycle	100000X on/off
Warranty Period	36 Months


SPECIFICATIONS

Code No.	Model No.	Power	Lumen	Efficacy	CCT	Current	D.F	P.F
LI615566	ILS36AWGLL830WW02	36W	1200lm	32.33lm/W	3000K	310mA	0.97	0.48
LI615567	ILS18AWGLL830WW02	18W	500lm	27.78lm/W	3000K	160mA	0.98	0.46
LI615568	ILS10AWGLL830WW02	12W	300lm	25lm/W	3000K	120mA	0.97	0.44


DIMENSIONS

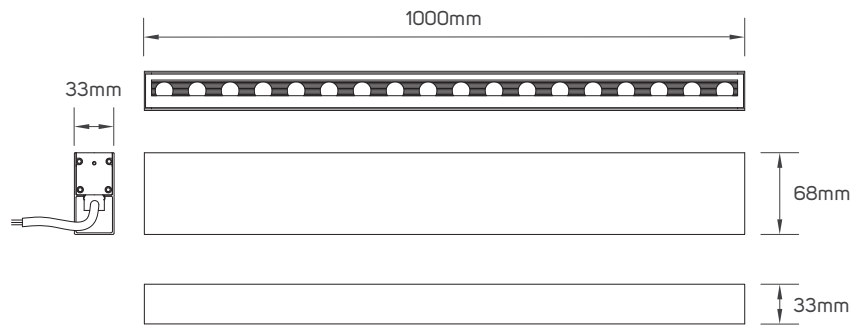

LI615566 (Cutting Size L1005MM-W36MM)

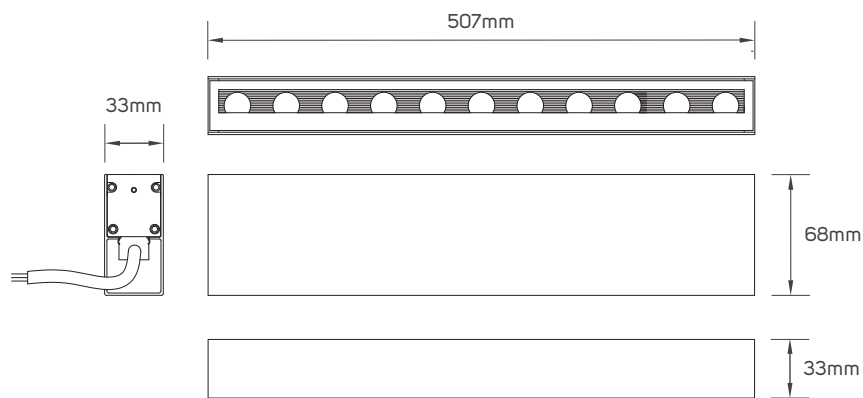

LI615567 (Cutting Size L512MM-W36MM)

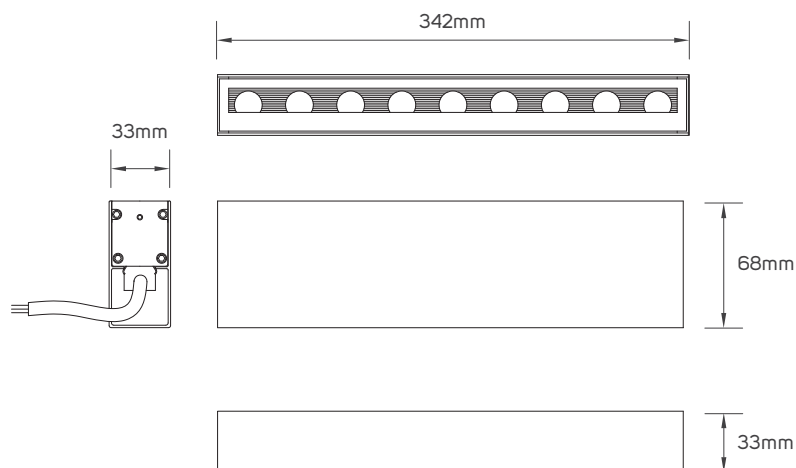

LI615568 (Cutting Size L347MM-W36MM)



This image is for display purpose only, the image may differ from the actual product, as the product is subject to modification provided without prior notice.

SLIM LED WALL GRAZER LUMINAIRE SERIES

**BEYOND LIGHT..
TO THE LAST DETAILS!**

