

L≢ PRO

Simple and flexible solution to design modern light lines in professional and retail spaces

LED RECESSED LINEAR LIGHT LUMINAIRE(WALL WASHER) SERIES

PRODUCT INFORMATION

- Modern looking, neat luminaire offering comfortable, good quality lighting and can also work as a design element.
- Ideal lighting in the non-working areas of professional spaces such as offices, educational institutes, and also the welcoming areas and entrances of retail spaces.
- ILLUS LED RECESSED LINEAR Luminaire gives the customer the flexibility to choose between 12 models based on their specific need with lumen package from 415lm to 1520lm.

BENEFITS

- Clean and uniform light.
- Multiple application use.
- Easy to install and maintain.

FEATURES

- High CRI>95.
- Efficacy up to 80lm/w.
- Lifespan 30000H.
- Operating voltage AC220-240V.
- Non-Dimmable.



AREAS OF APPLICATION





Hospitality

Shopping Center





Commercial

Educational Center


I TECHNICAL OPERATING & ELECTRICAL DATA

Body Color	White+Grey
Body Material	Aluminum + Plastic
Rated CRI	95
Voltage and Frequency	AC220-240V, 50/60Hz
IP Rating	IP20
Dimming	Non-Dimmable
Beam Angle	90°
IEC Classification	Class II
Ambient Temperature	-20°C~45°C
Lifespan	30000Н
Switching Cycle	100000x on/off
Warranty Period	36 Months


SPECIFICATIONS

Code No.	Model No.	Power	Lumen	Efficacy	ССТ	Current	Saving Energy	Equivalent
LI615015	ILS6WGDL930WW03	6W	415lm	69.17lm/W	3000K	50mA	83%	36W
LI615016	ILS6WGDL940NW03	6W	425lm	79.83lm/W	4000K	50mA	84%	37W
LI615017	ILS6WGDL950DL03	6W	445lm	74.17lm/W	5000K	50mA	84%	38W
LI615019	ILS9.5WGDL930WW03	9.5W	640lm	67.37lm/W	3000K	80mA	81%	50W
LI615020	ILS9.5WGDL940NW03	9.5W	660lm	69.47lm/W	4000K	80mA	81%	51W
LI615021	ILS9.5WGDL950DL03	9.5W	705lm	74.21lm/W	5000K	80mA	82%	54W
LI615023	ILS11.5WGDL930WW03	11.5W	800lm	69.57lm/W	3000K	90mA	81%	60W
LI615024	ILS11.5WGDL940NW03	11.5W	830lm	72.17lm/W	4000K	90mA	81%	61W
LI615025	ILS11.5WGDL950DL03	11.5W	865lm	75.22lm/W	5000K	90mA	82%	64W
LI615027	ILS19.5WGDL930WW03	19.5W	1410lm	72.31lm/W	3000K	150mA	79%	94W
LI615028	ILS19.5WGDL940NW03	19.5W	1460lm	74.87lm/W	4000K	150mA	80%	97W
LI615029	ILS19.5WGDL950DL03	19.5W	1520lm	77.95lm/W	5000K	150mA	81%	100W

DIMENSIONS

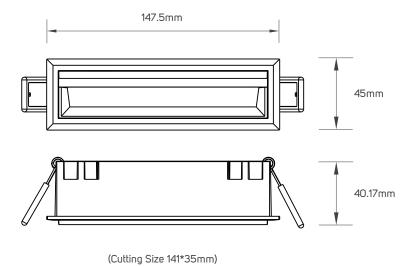


LI615015 - LI615016 - LI615017 - LI615019 - LI615020 - LI615021

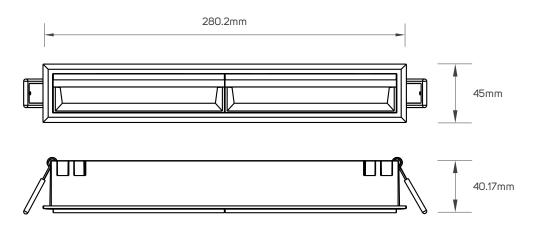

(Cutting Size 274*35mm)

LI615023 - LI615024 - LI615025 - LI615027 - LI615028 - LI615029

APPLICATION PICTURE

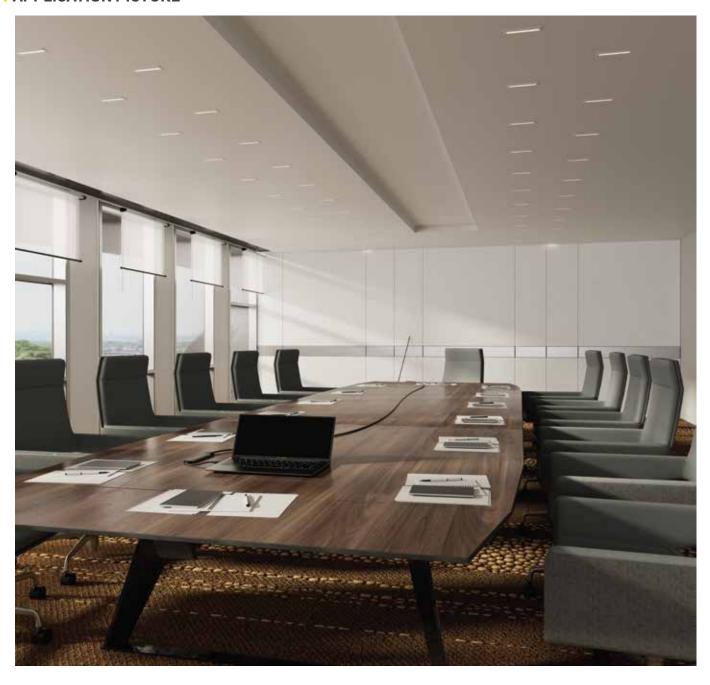

LED RECESSED LINEAR LIGHT LUMINAIRE(WALL WASHER) SERIES BEYOND LIGHT..
TO THE LAST DETAILS!

