

L≢ PRO

Simple and flexible solution to design modern light lines in professional and retail spaces

LED RECESSED SPOT LIGHT LUMINAIRE SERIES

PRODUCT INFORMATION

- Modern looking, neat luminaire offering comfortable, good quality lighting and can also work as a design element.
- Ideal lighting in the non-working areas of professional spaces such as offices, educational institutes, and also the welcoming areas and entrances of retail spaces.
- ILLUS LED RECESSED LINEAR Luminaire gives the customer the flexibility to choose between 6 models based on their specific need with lumen package from 460lm to 820lm.

BENEFITS

- Clean and uniform light.
- Multiple application use.
- Easy to install and maintain.

FEATURES

- High CRI>95.
- Efficacy up to 83lm/w.
- Lifespan 30000H.
- Operating voltage AC220-240V.
- Non-Dimmable.



AREAS OF APPLICATION





Hospitality

Shopping Center





Commercial

Educational Center


I TECHNICAL OPERATING & ELECTRICAL DATA

Body Color	White
Body Material	Aluminum + Plastic
Rated CRI	95
Voltage and Frequency	AC220-240V, 50/60Hz
IP Rating	IP20
Dimming	Non-Dimmable
Beam Angle	24°
IEC Classification	Class II
Ambient Temperature	-20°C~45°C
Lifespan	30000Н
Switching Cycle	100000x on/off
Warranty Period	36 Months

SPECIFICATIONS


Code No.	Model No.	Power	Lumen	Efficacy	CCT	Saving Energy	Current	Equivalent
LI615031	ILS6WGSL930WW01	6W	460lm	76.67lm/W	3000K	91%	50mA	65W
LI615032	ILS6WGSL940NW01	6W	475lm	79.17lm/W	4000K	91%	50mA	67W
LI615033	ILS6WGSL950DL01	6W	500lm	83.33lm/W	5000K	91%	50mA	70W
LI615035	ILS10WGSL930WW01	10W	750lm	75lm/W	3000K	90%	70mA	103W
LI615036	ILS10WGSL940NW01	10W	780lm	78lm/W	4000K	91%	70mA	107W
LI615037	ILS10WGSL950DL01	10W	820lm	82lm/W	5000K	91%	70mA	112W

DIMENSIONS



(Cutting Size 96*35mm)


LI615031 - LI615032 - LI615033



(Cutting Size 156*35mm)

LI615035 - LI615036 - LI615037

APPLICATION PICTURE

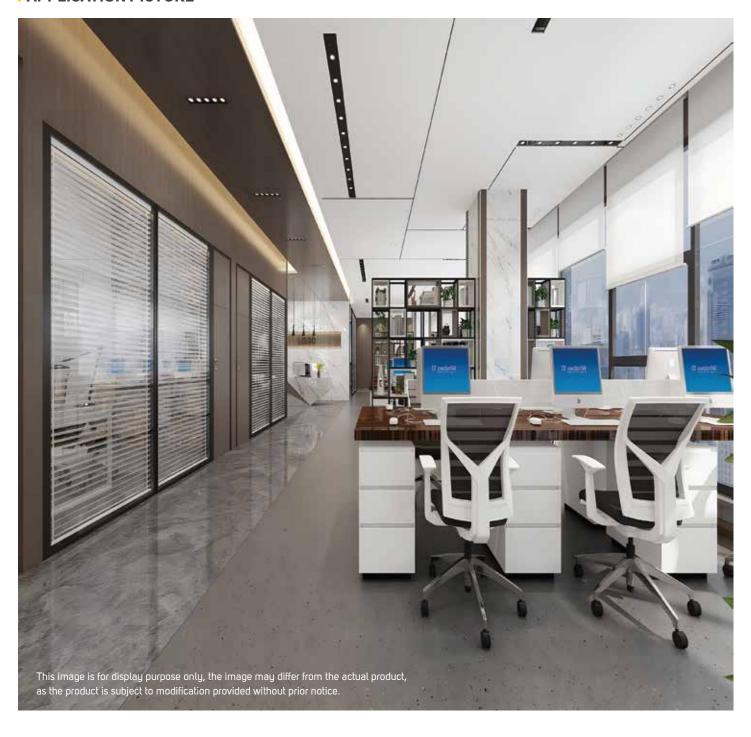

LED RECESSED LINEAR SPOT LIGHT LUMINAIRE SERIES BEYOND LIGHT..
TO THE LAST DETAILS!

