



For every project, where light really matters

LED RECESSED CEILING LUMINAIRE SERIES

PRODUCT INFORMATION

- Suitable for a series of lighting applications in office, retail and general area lighting.
- Available in a wide variety of lumen packs, cut out size and color temperature.
- ILLUS LED RECESSED CEILING Luminaire gives the customer the flexibility to choose between 15 models based on their specific need with lumen package from 510 lm to 3060 lm.

BENEFITS

- Compact design for better integration with the building.
- Comfortable light with high efficiency.
- Reliable performance for indoor applications.

FEATURES

- High CRI>90.
- Efficacy up to 91 lm/w.
- Long life span 50,000 hrs.
- Operating voltage AC220 – 240V.
- Non – dimmable.



**BEYOND LIGHT..
TO THE LAST DETAILS!**

AREAS OF APPLICATION



Hospitality



Shopping Center



Commercial



Educational Center



TECHNICAL OPERATING & ELECTRICAL DATA

IP Ratings	IP44
CRI	90
Body Material	Aluminum
Body Color	White
Lumen	from 510 to 3060lm/M+/-10%
Voltage	AC220-240V
Frequency	50/60Hz
Beam Angle	90°
Mounting Type	Recessed on Ceiling
Dimming	Non-Dimmable
Lamp Type	Direct
Fixed or Adjustable	Fixed
Life Span	50000h

SPECIFICATIONS



Code No.	Model No.	Power	Lumen	Efficacy	CCT
613132	ILS7DL930WW02	7W	510lm	72.86lm/W	3000K
613133	ILS7DL940NW02	7W	520lm	74.29lm/W	4000K
613134	ILS7DL957DL02	7W	540lm	77.14lm/W	5700K
613135	ILS10DL930WW02	10W	820lm	82.00lm/W	3000K
613136	ILS10DL940NW02	10W	840lm	84.00lm/W	4000K
613137	ILS10DL957DL02	10W	870lm	87.00lm/W	5700K
613138	ILS15DL930WW02	15W	1250lm	83.33lm/W	3000K
613139	ILS15DL940NW02	15W	1280lm	85.33lm/W	4000K
613140	ILS15DL957DL02	15W	1320lm	88.00lm/W	5700K
613141	ILS24DL930WW02	23W	2000lm	86.96lm/W	3000K
613142	ILS24DL940NW02	23W	2040lm	88.70lm/W	4000K
613143	ILS24DL957DL02	23W	2100lm	91.30lm/W	5700K
613144	ILS36DL930WW02	35W	2950lm	84.29lm/W	3000K
613145	ILS36DL940NW02	35W	3000lm	85.71lm/W	4000K
613146	ILS36DL957DL02	35W	3060lm	87.43lm/W	5700K

DIMENSIONS




613132 - 613133 - 613134

613135 - 613136 - 613137



613138 - 613139 - 613140

613141 - 613142 - 613143




613144 - 613145 - 613146

ACCESSORIES


LED RECESSED CEILING LUMINAIRE DRIVER
AVAILABLE AS AN ACCESSORY

Code No.	Model No.	Power	Voltage
613147	ILS7WACDLD02	7W	AC220-240V
613148	ILS10WACDLD02	10W	AC220-240V
613149	ILS15WACDLD02	15W	AC220-240V
613150	ILS24WACDLD02	24W	AC220-240V
613151	ILS36WACDLD02	36W	AC220-240V


ACCESSORIES DIMENSIONS

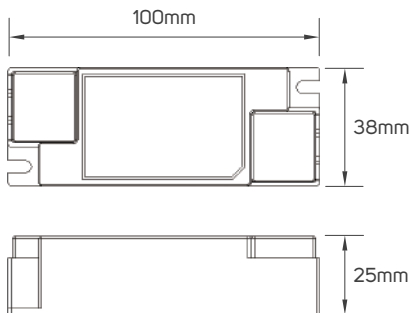

613147

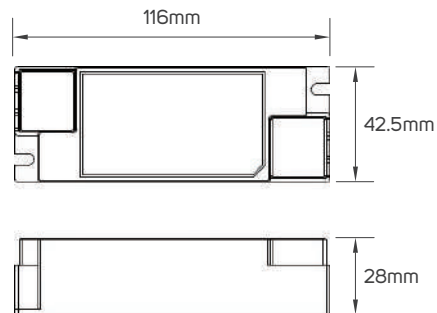

613148 - 613149

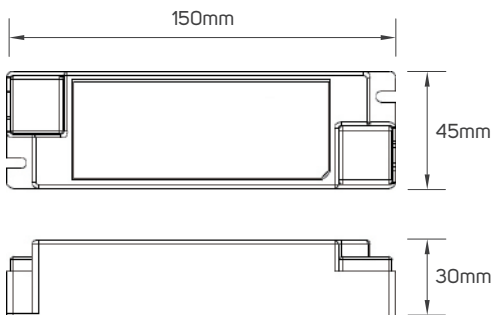

613150 - 613151

APPLICATION PICTURE



LED RECESSED CEILING LUMINAIRE SERIES

**BEYOND LIGHT..
TO THE LAST DETAILS!**



Carrer de la Vall de la Ballestera, 64, 46015 València, Valencia, España, Tel: +34619824456

www.illusillumination.com

illus illumination reserve the right to make dimensional, design and technical alternations without prior notice. illus illumination endeavor to ensure that any advice, recommendation or information it provides in product literature is accurate and correct. However due to the fact that illus do not have direct control on where and how the products are installed, illus illumination cannot accept any liability either direct or indirect arising from the use of illus products whether or not in accordance with any advice, specification, recommendation or information provided by illus illumination or its distributors.

11192021M1