

Simple and flexible solution to design modern light lines in professional and retail spaces

LED ADJUSTABLE MAGNETIC TRACK LINEAR LIGHT SERIES

PRODUCT INFORMATION

- Modern looking, neat luminaire offering comfortable, good quality lighting and can also work as a design element.
- Ideal lighting in the non-working areas of professional spaces such as offices, educational institutes, and also the welcoming areas and entrances of retail spaces.
- ILLUS LED ADJUSTABLE MAGNETIC TRACK LINEAR Light gives the customer the flexibility to choose between 6 models based on their specific need with lumen package from 750lm to 1850lm.

BENEFITS

- Clean and uniform light.
- Multiple application use.
- Easy to install and maintain.

FEATURES

- High CRI>90.
- Efficacy up to 94lm/w.
- Long life span 30000H.
- Operating voltage DC48V.
- Non-Dimmable.



AREAS OF APPLICATION





Hospitality

Shopping Center





Commercial

Educational Center




I TECHNICAL OPERATING & ELECTRICAL DATA

IP Ratings	IP20
Rated CRI	90
Body Color	Sandy White
Body Material	Aluminum
IEC Classification	Class III
Driver Voltage	DC48V
Beam Angle	30°
Ambient Temperature	-20°C~45°C
Dimming	Non-Dimmable
Lifespan	30000Н
Switching Cycle	100000x on/off
Warranty Period	36 Months


SPECIFICATIONS

Code No.	Model No.	Power	Lumen	Efficacy	CCT
614532	ILS8.5W30DMTL930WWW02	8.5W	750lm	88.24lm/W	3000K
614533	ILS8.5W30DMTL940NWW02	8.5W	800lm	94.12lm/W	4000K
614534	ILS15W30DMTL930WWW02	15W	1300lm	86.67lm/W	3000K
614535	ILS15W30DMTL940NWW02	15W	1370lm	91.33lm/W	4000K
614536	ILS20W30DMTL930WWW02	20W	1750lm	87.50lm/W	3000K
614537	ILS20W30DMTL940NWW02	20W	1850lm	92.50lm/W	4000K


DIMENSIONS

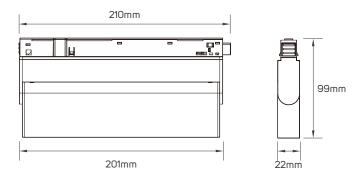

614532 - 614533

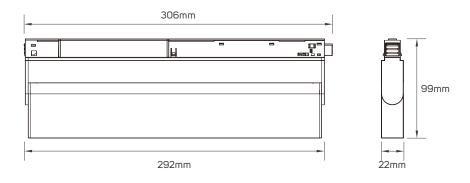

614534 - 614535

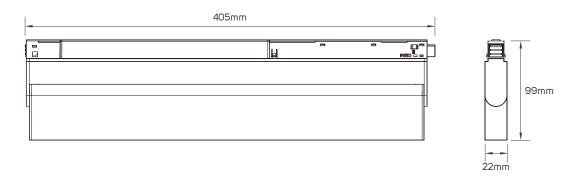


614536 - 614537


ACCESSORIES

Code No.	Model No.	Body Color	Body Material	Power
614564	ILS1M4RTLW01	sandy white	aluminum	/
614565	ILS2M4RTLW01	sandy white	aluminum	/
614566	ILS3M4RTLW01	sandy white	aluminum	/
614567	ILS1M4RTLW02	sandy white	aluminum	/
614568	ILS2M4RTLW02	sandy white	aluminum	/
614569	ILS3M4RTLW02	sandy white	aluminum	/
614570	ILS48VPSTRKW01	sandy white	plastic	150W
614571	ILSRATRKW01	sandy white	aluminum	/
614572	ILSRATRKW02	sandy white	aluminum	/
614573	ILSSMATRKW01	sandy white	aluminum	/
614574	ILSSMATRKW02	sandy white	aluminum	/
614575	ILSCITRKW01	sandy white	plastic	/
614576	ILSCLTRKW01	sandy white	plastic	/
613682	ILSPKITTRK01	silver	steel	/
613683	ILSTKITTRK01	silver	aluminum	/


ACCESSORIES DIMENSIONS

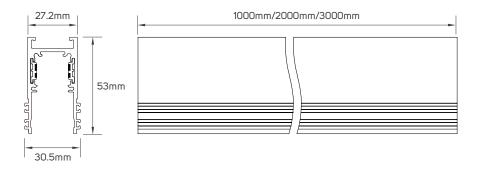

614564 - 614565 - 614566

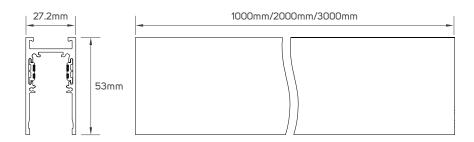


614567 - 614568 - 614569

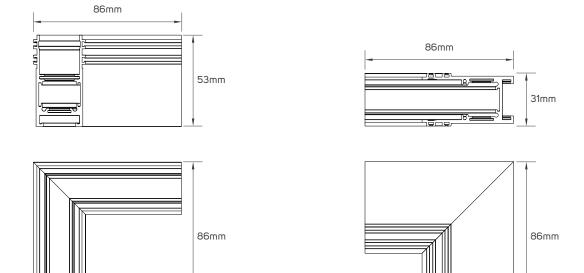

614571 614572


ACCESSORIES DIMENSIONS

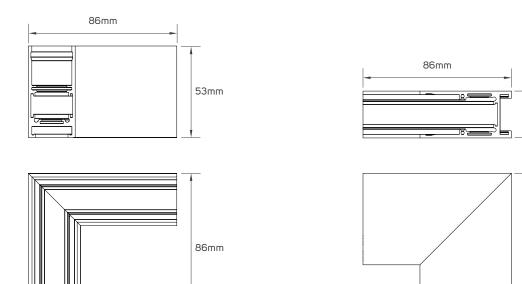


27.2mm

86mm


614573 614574

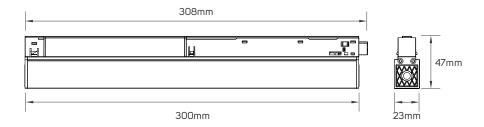


614570

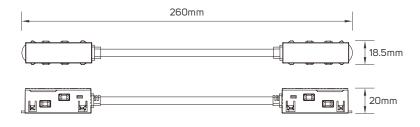


614575




ACCESSORIES DIMENSIONS





APPLICATION PICTURE

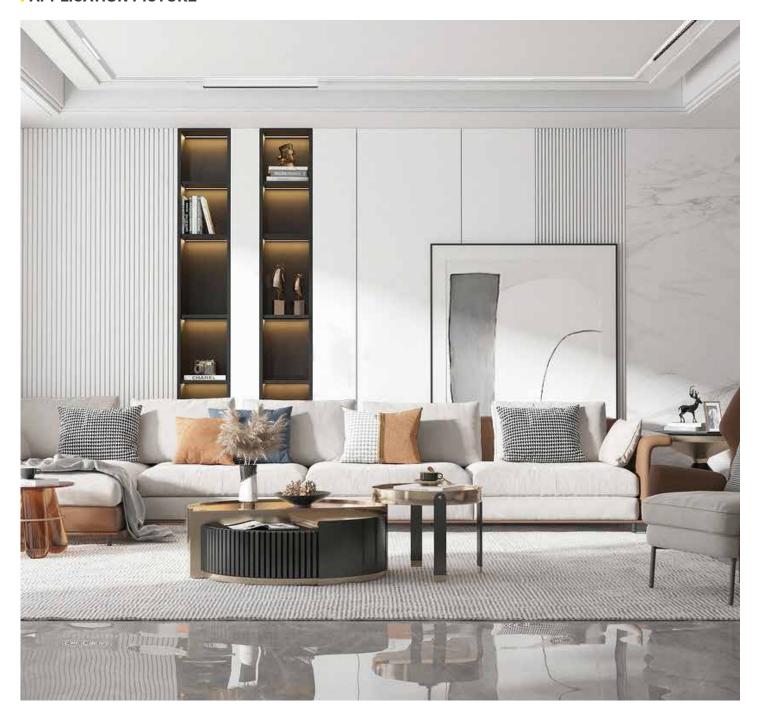

LED ADJUSTABLE MAGNETIC TRACK LINEAR LIGHT SERIES BEYOND LIGHT..
TO THE LAST DETAILS!

