

Simple and flexible solution to design modern light lines in professional and retail spaces

LED MAGNETIC TRACK LINEAR LIGHT SERIES

PRODUCT INFORMATION

- Modern looking, neat luminaire offering comfortable, good quality lighting and can also work as a design element.
- Ideal lighting in the non-working areas of professional spaces such as offices, educational institutes, and also the welcoming areas and entrances of retail spaces.
- ILLUS LED MAGNETIC TRACK LINEAR Light gives the customer the flexibility to choose between 8 models based on their specific need with lumen package from 750lm to 2250lm.

BENEFITS

- Clean and uniform light.
- Multiple application use.
- Easy to install and maintain.

FEATURES

- High CRI>90.
- Efficacy up to 98lm/w.
- Long lifespan 30000H.
- Operating voltage DC48V.
- Non-Dimmable.



AREAS OF APPLICATION





Hospitality

Shopping Center





Commercial

Educational Center




I TECHNICAL OPERATING & ELECTRICAL DATA

IP Rating	IP20
Rated CRI	90
Body Color	Sandy Black
Body Material	Aluminum
IEC Classification	Class III
Operating Voltage	DC48V
Beam Angle	30°
Ambient Temperature	-20°C~45°C
Dimming	Non-Dimmable
Lifespan	30000Н
Switching Cycle	100000x on/off
Warranty Period	36 Months


SPECIFICATIONS

Code No.	Model No.	Power	Lumen	Efficacy	CCT
613629	ILS9W36DMTL930WW01	8.5W	750lm	88.24lm/W	3000K
613630	ILS9W36DMTL940NW01	8.5W	800lm	94.12lm/W	4000K
613631	ILS15W36DMTL930WW01	14.5W	1300lm	89.66lm/W	3000K
613632	ILS15W36DMTL940NW01	14.5W	1370lm	94.48lm/W	4000K
613633	ILS20W36DMTL930WW01	20W	1650lm	82.50lm/W	3000K
613634	ILS20W36DMTL940NW01	20W	1750lm	87.50lm/W	4000K
613635	ILS24W110DMTL930WW01	23W	2050lm	89.13lm/W	3000K
613636	ILS24W110DMTL940NW01	23W	2250lm	97.83lm/W	4000K


DIMENSIONS

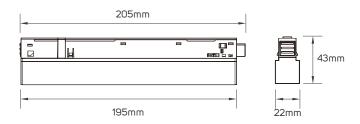


613629 - 613630

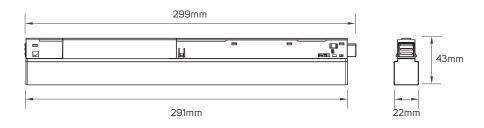

613631 - 613632

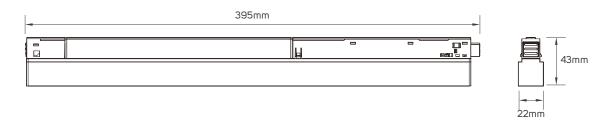


613633 - 613634

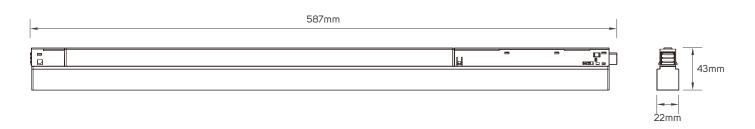


ACCESSORIES

Code No.	Model No.	Body Color	Body Material	Power
613669	ILS1M4RTLB01	sandy black	aluminum	/
613670	ILS2M4RTLB01	sandy black	aluminum	/
613671	ILS3M4RTLB01	sandy black	aluminum	/
613672	ILS1M4RTLB02	sandy black	aluminum	/
613673	ILS2M4RTLB02	sandy black	aluminum	/
613674	ILS3M4RTLB02	sandy black	aluminum	/
613675	ILS48VPSTRK01	sandy black	plastic	150W
613676	ILSRATRK01	sandy black	aluminum	/
613677	ILSRATRK02	sandy black	aluminum	/
613678	ILSSMATRK01	sandy black	aluminum	/
613679	ILSSMATRK02	sandy black	aluminum	/
613680	ILSCITRK01	sandy black	plastic	/
613681	ILSCLTRK01	sandy black	plastic	/
613682	ILSPKITTRK01	nickle	steel	/
613683	ILSTKITTRK01	sliver	aluminum	/


ACCESSORIES DIMENSIONS

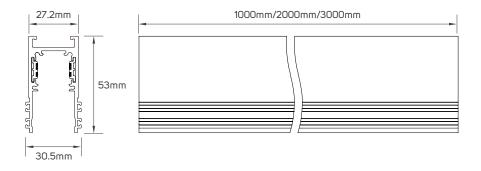

613669 - 613670 - 613671

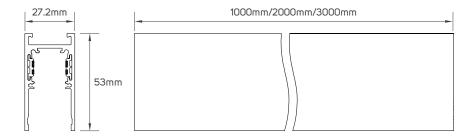


613672- 613673 - 613674

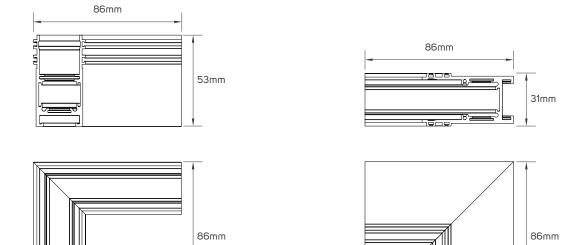


613676 613677


ACCESSORIES DIMENSIONS

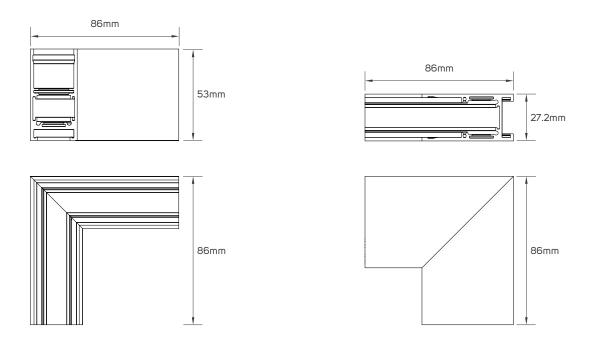


613678 613679

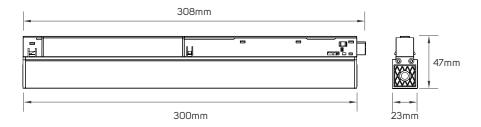

613675

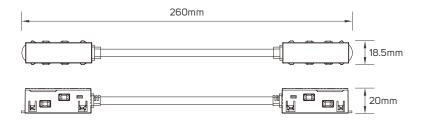



613680




613681

ACCESSORIES DIMENSIONS





APPLICATION PICTURE

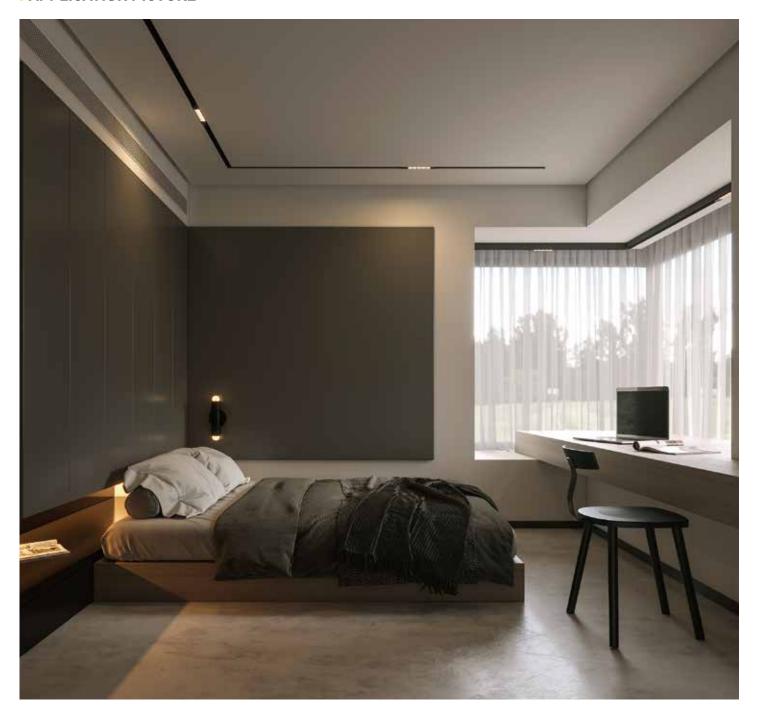

LED MAGNETIC TRACK LINEAR LIGHT SERIES BEYOND LIGHT..
TO THE LAST DETAILS!

