

L = PRO

LED PENDANT LIGHT LUMINAIRE SERIES

PRODUCT INFORMATION

- Illus LED Pendant Luminaires offer a sophisticated blend of form and function, engineered for architectural versatility across residential and commercial interiors.
- Designed for use in a wide range of environments—living rooms, kitchens, offices, and more—these fixtures ensure consistent lighting performance and visual harmony.
- Integrated crystal accents enhance light dispersion and create a luxurious, refined ambiance.
- Available in 10 configurable models, allowing tailored adjustments to color temperature and dimensions for scalable, application-specific solutions.

BENEFITS

- Designed for low energy consumption and extended operational life, promoting long-term cost savings and reduced environmental impact.
- Engineered for longevity and efficient thermal management, LED pendant luminaires ensure reliable performance and extended service life.
- Versatile design, LED pendant luminaires complement a wide range of interior styles and are widely adopted in both residential and commercial environments.

FEATURES

- High CRI>90.
- Lifespan 30,000H.
- Operating Voltage AC220-240V.
- Non-Dimmable.









AREAS OF APPLICATION





Hospitality

Shopping Center





Commercial

Educational Center


I TECHNICAL OPERATING & ELECTRICAL DATA


Body Material	Glass+Aluminum+Iron+Acrylic
Color Temperature	3000K
CRI	≥90
Input Voltage & Frequency	AC220-240V, 50/60Hz
Ambient Temperature	-20°C~ 45°C
IP Rating	IP20
IEC Classification	Class I
Beam Angle	120°
Dimming	Non-Dimmable
Switching Cycle	100000x on/off
Lifespan	30,000H
Warranty Period	36 Months

SPECIFICATIONS


Code No.	Model No.	Body Color	Wattage	D.F	P.F	Current
LI661744	ILT5PL930BR01	Copper	5W	0.9	0.55	40mA
LI661745	ILT7PL930BR01	Copper	8W	0.9	0.56	60mA
LI661746	ILT9PL930BR01	Copper	10W	0.9	0.95	43mA
LI661747	ILT5PL930B01	Sandy Black	5W	0.9	0.55	40mA
LI661748	ILT7PL930B01	Sandy Black	8W	0.9	0.56	60mA
LI661749	ILT9PL930B01	Sandy Black	10W	0.9	0.95	43mA
LI661756	ILT9DPL930BRA02	Copper	11W	0.9	0.7	69mA
LI661757	ILT9DPL930BS02	Sandy Black	11W	0.9	0.7	69mA


DIMENSIONS



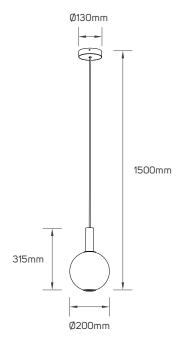

LI661744 - LI661747 LI661745 - LI661748







LI661746 - LI661749 LI661756 - LI661757

I ACCESSORIES SPECIFICATIONS

Code No.	Model No.	Body Color	Body Material
LI661744GS	ILT5PL930BRGS	Amber	Glass
LI661745GS	ILT7PL930BRGS	Amber	Glass
LI661746GS	ILT9PL930BRGS	Amber	Glass
LI661747GS	ILT5PL930BGS	Smoke Grey	Glass
LI661748GS	ILT7PL930BGS	Smoke Grey	Glass
LI661749GS	ILT9PL930BGS	Smoke Grey	Glass
LI661756GS	ILT9DPL930BRAGS1	Amber	Glass
LI661757GS	ILT9DPL930BSGS2	Smoke Grey	Glass


ACCESSORIES DIMENSIONS






LI661744GS - LI661748GS

LI661745GS - LI661747GS






LI661746GS - LI661749GS

LI661756GS - LI661757GS

APPLICATION PICTURE

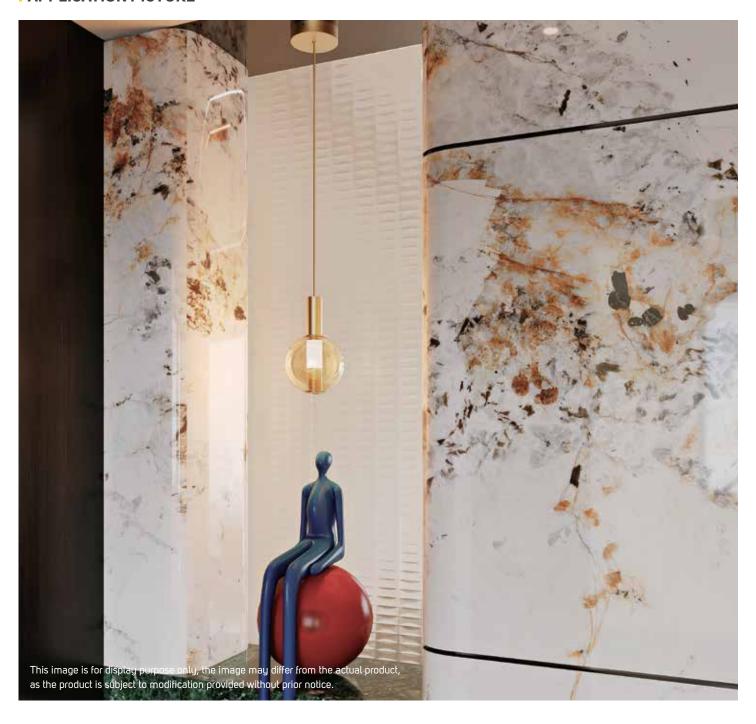

LED PENDANT LIGHT LUMINAIRE SERIES

BEYOND LIGHT..
TO THE LAST DETAILS!







build-station lighting stores

illus lighting