



# LED PENDANT LIGHT LUMINAIRE SERIES

## PRODUCT INFORMATION

- Ilicit LED Pendant Luminaires offer a sophisticated blend of form and function, engineered for architectural versatility across residential and commercial interiors.
- Designed for use in a wide range of environments—living rooms, kitchens, offices, and more—these fixtures ensure consistent lighting performance and visual harmony.
- Integrated crystal accents enhance light dispersion and create a luxurious, refined ambiance.
- Available in 7 configurable models, allowing tailored adjustments to color temperature and dimensions for scalable, application-specific solutions.

## BENEFITS

- Designed for low energy consumption and extended operational life, promoting long-term cost savings and reduced environmental impact.
- Engineered for longevity and efficient thermal management, LED pendant luminaires ensure reliable performance and extended service life.
- Versatile design, LED pendant luminaires complement a wide range of interior styles and are widely adopted in both residential and commercial environments.

## FEATURES

- High CRI $\geq$ 95.
- Lifespan 30,000H.
- Operating Voltage AC220-240V.
- Non-Dimmable.



## AREAS OF APPLICATION



Hospitality



Shopping Center



Commercial



Educational Center


## TECHNICAL OPERATING & ELECTRICAL DATA

Body Material	Metal
Color Temperature	3000K
Rated CRI	≥95
Input Voltage & Frequency	AC220-240V, 50/60Hz
Ambient Temperature	-20°C~45°C
IP Rating	IP20
IEC Classification	Class I
Dimming	Non-Dimmable
Switching Cycle	50000x on/off
Lifespan	30000H
Warranty Period	36 Months


## SPECIFICATIONS

Code No.	Model No.	Body Color	Wattage	D.F	P.F	Current
LI661693	ILT15DDPL930SG01	Grey	33W	0.94	0.91	160mA
LI661694	ILT25DDPL930SG01	Grey	40W	0.95	0.94	200mA
LI661716	ILT15DDPL930SG02	Grey	33W	0.91	0.91	160mA
LI661717	ILT25DPL930BR01	Brass	28W	0.89	0.87	140mA
LI661718	ILT25DPL930B01	Black	28W	0.89	0.87	140mA
LI661719	ILT25DPL930SG01	Black	95W	0.95	0.95	440mA
LI661720	ILT30DPL930SG01	Black	115W	0.96	0.96	520mA


# DIMENSIONS

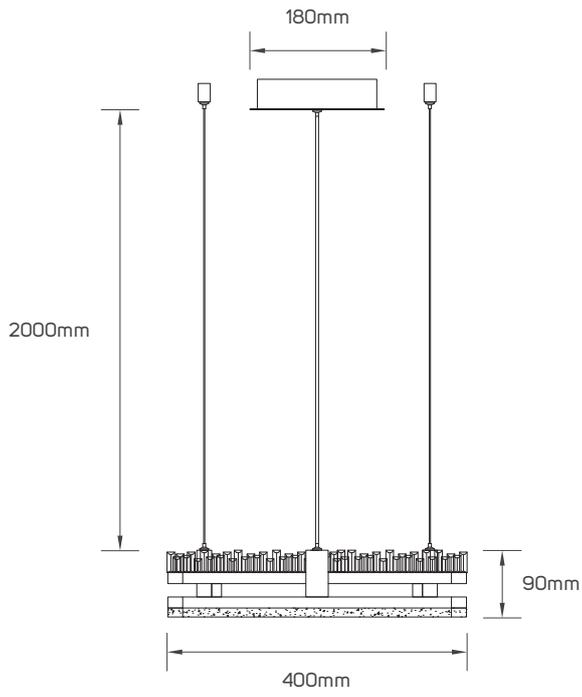


LI661693

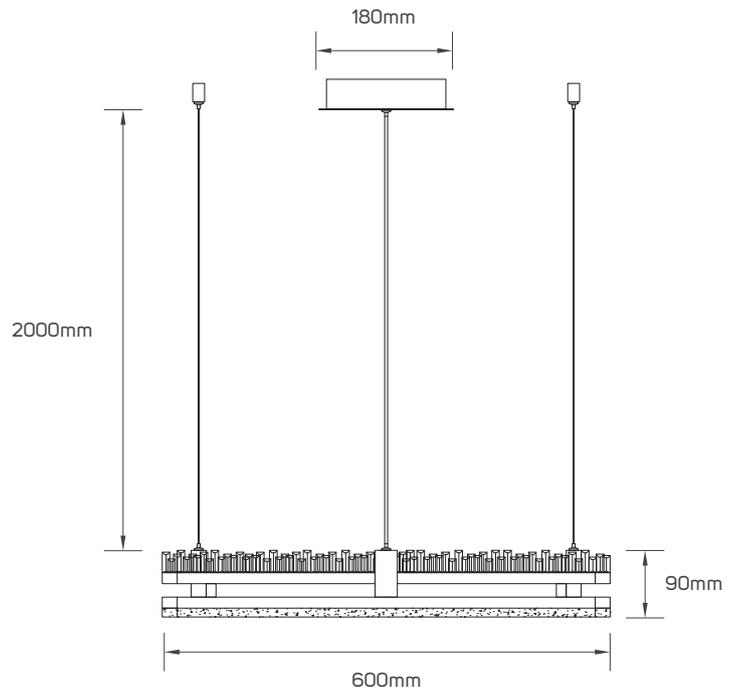

LI661694


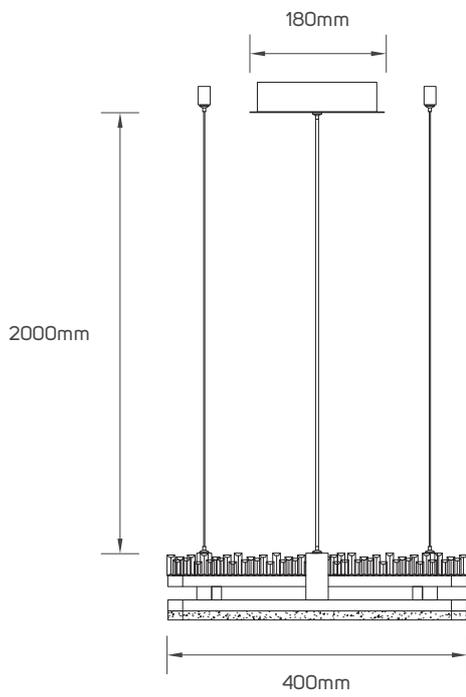


LI661716

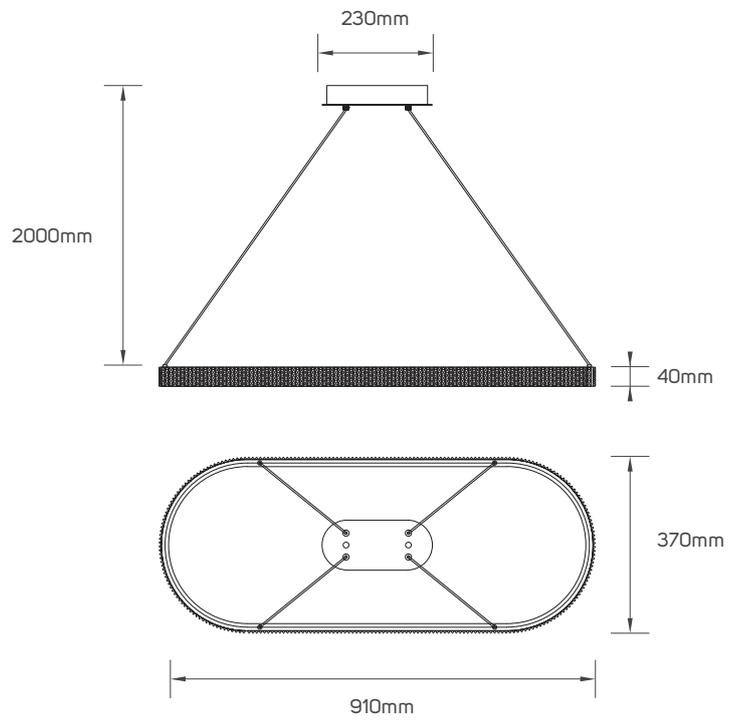

LI661717 - LI661718

## DIMENSIONS

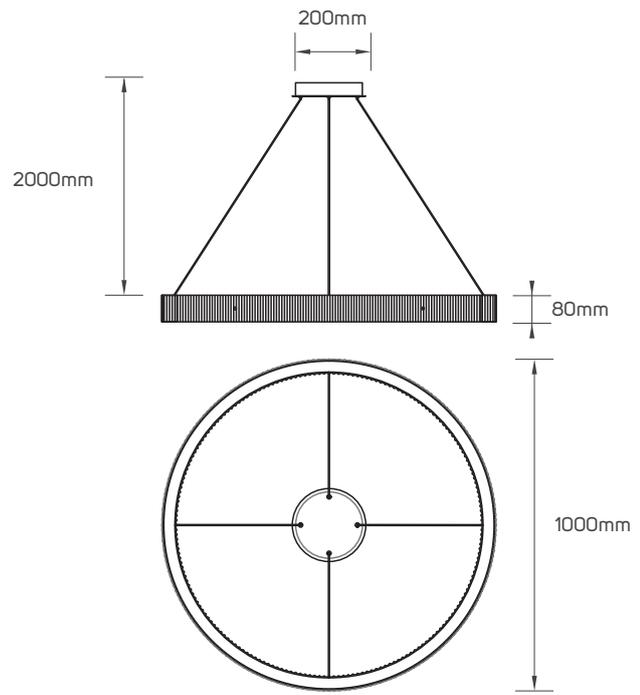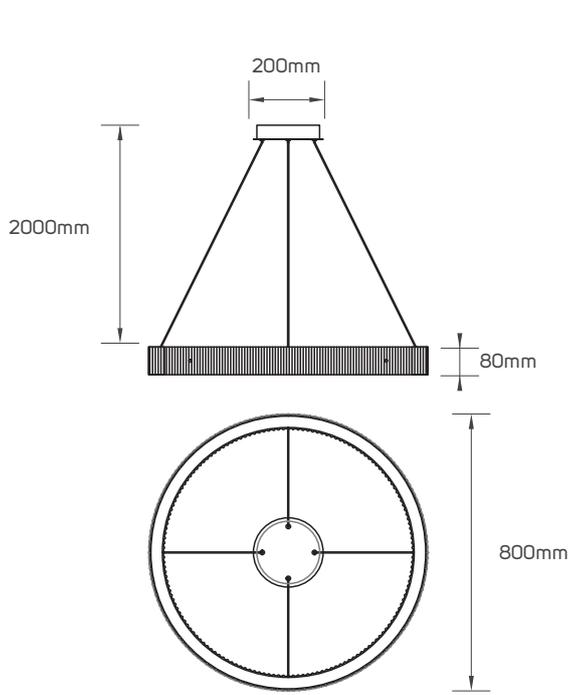

LI661719

LI661720

## APPLICATION PICTURE



This image is for display purpose only, the image may differ from the actual product, as the product is subject to modification provided without prior notice.

## LED PENDANT LIGHT LUMINAIRE SERIES

**BEYOND LIGHT..  
TO THE LAST DETAILS!**



build-station



lighting stores



illus lighting

C/ Cuenca, 87, Alaquas 46970, (Valencia) Spain, Ph. 34 961 623 958

[www.illusillumination.com](http://www.illusillumination.com)

illus illumination reserve the right to make dimensional, design and technical alternations without prior notice. illus illumination endeavor to ensure that any advice, recommendation or information it provides in product literature is accurate and correct. However due to the fact that illus do not have direct control on where and how the products are installed, illus illumination cannot accept any liability either direct or indirect arising from the use of illus products whether or not in accordance with any advice, specification, recommendation or information provided by illus illumination or its distributors.