



Simple and flexible solution to design modern light lines in professional and retail spaces

LED BOLLARD LUMINAIRE SERIES

PRODUCT INFORMATION

- Modern looking, neat luminaire offering comfortable, good quality lighting and can also work as a design element.
- Ideal lighting in the non-working areas of professional spaces such as offices, educational institutes, and also the welcoming areas and entrances of retail spaces.
- ILLUS LED BOLLARD luminaire gives the customer the flexibility to choose between 18 models based on their specific need with lumen package from 200 lm to 790 lm.

BENEFITS

- Clean and uniform light.
- Multiple application use.
- Easy to install and maintain.

FEATURES

- Efficacy up to 94 lm/w.
- Long life span 30,000 hrs.
- Operating voltage AC100-220V.
- Non – dimmable.



**BEYOND LIGHT..
TO THE LAST DETAILS!**

AREAS OF APPLICATION



Hospitality



Shopping Center



Commercial



Educational Center




TECHNICAL OPERATING & ELECTRICAL DATA

CCT	3000K
Body Color	Dark Gray
Body Material	Aluminum
Ambient Temperature	-20°C~45°C
Voltage	AC100-240V
Frequency	50/60Hz
Dimming	Non-Dimmable
IEC Classification	Class I
Switching Cycle	100000X on/off
Lifespan	30000H
Warranty	36 Months


SPECIFICATIONS

Code No.	Model No.	Power	Lumen	Efficacy	Beam Angle	IP	CRI
LI521311	ILS8SMOBDL02	8.5W	500lm	58.82lm/W	60°	65	85
LI521312	ILS8SMOBDL03	8.5W	500lm	58.82lm/W	60°	65	85
LI521313	ILS12SMOBDL03	13W	550lm	42.31lm/W	140°	65	85
LI521314	ILS12SMOBDL04	13W	550lm	42.31lm/W	140°	65	85
LI521315	ILS8SMOBDL04	8W	750lm	93.75lm/W	100°	65	95
LI521316	ILS6SMOBDL01	7W	200lm	28.57lm/W	70°	54	95
LI521318	ILS8SMOBDL05	8.5W	385lm	45.29lm/W	70°	65	85
LI521319	ILS8SMOBDL06	8.5W	385lm	45.29lm/W	70°	65	85
LI521321	ILS12SMOBDL05	12.5W	600lm	48lm/W	120°	65	85
LI521322	ILS12SMOBDL06	12.5W	600lm	48lm/W	120°	65	85
LI521323	ILS12SMOBDL07	12.5W	445lm	35.60lm/W	100°	65	85
LI521324	ILS12SMOBDL08	12.5W	790lm	63.20lm/W	180°	65	85
LI521325	ILS12SMOBDL09	12.5W	790lm	63.20lm/W	180°	65	85
LI521326	ILS12SMOBDL10	12.5W	790lm	63.20lm/W	180°	65	85
LI521327	ILS12SMOBDL11	13W	220lm	16.92lm/W	140°	54	85
LI521328	ILS12SMOBDL12	13W	220lm	16.92lm/W	140°	54	85
LI521329	ILS12SMOBDL13	13W	590lm	45.38lm/W	180°	65	85
LI521330	ILS12SMOBDL14	13W	590lm	45.38lm/W	180°	65	85


DIMENSIONS

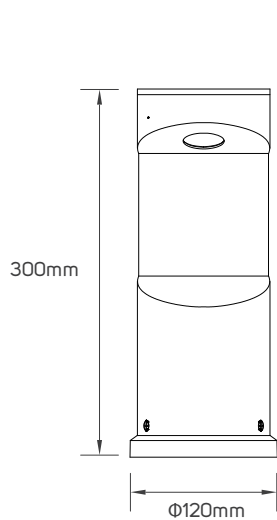


LI521311

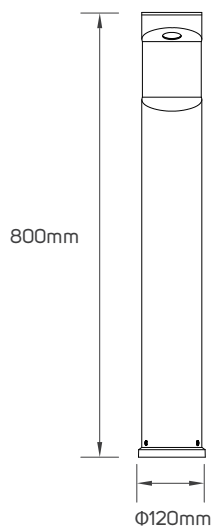


LI521312

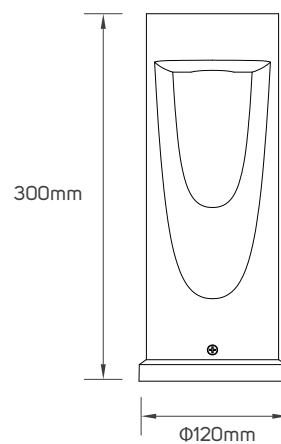


LI521313

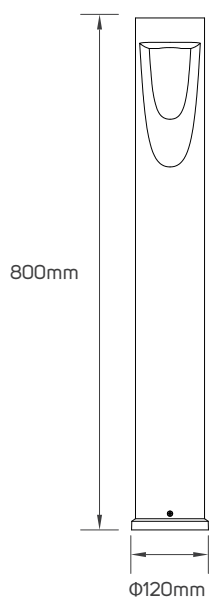


LI521314

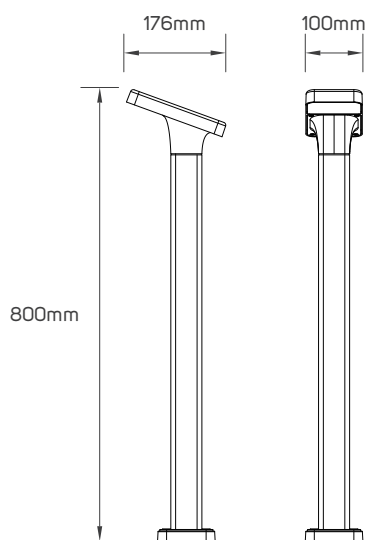


LI521315

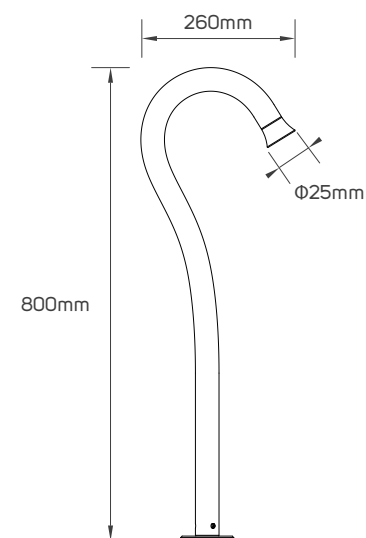


LI521316

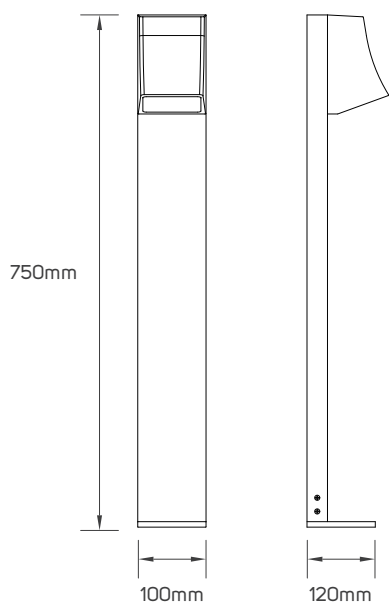

LI521318

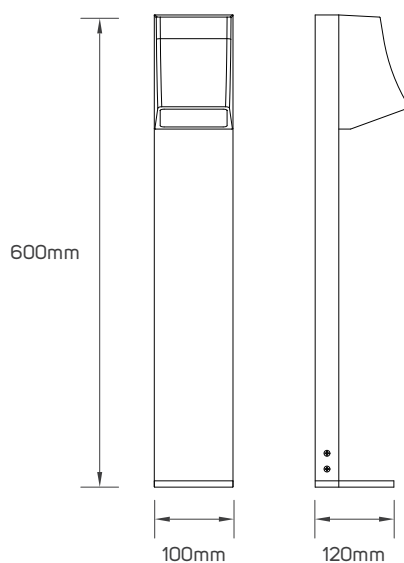


LI521319

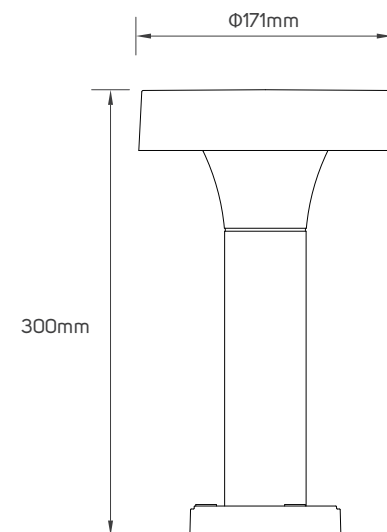


LI521321


DIMENSIONS

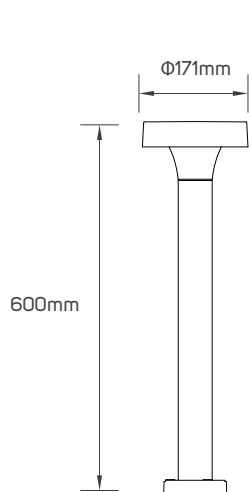


LI521322

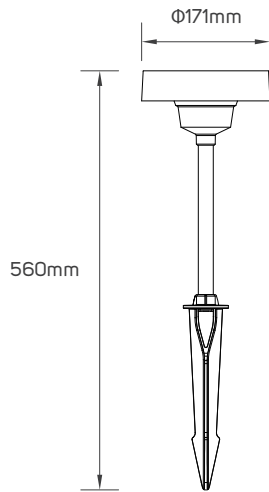


LI521323

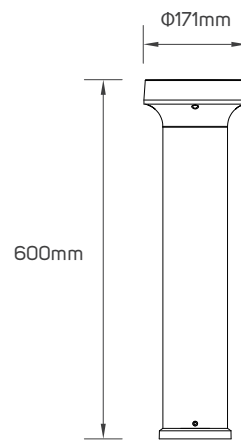


LI521324

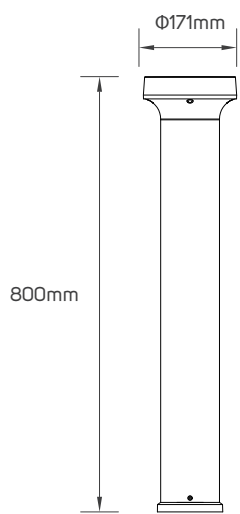


LI521325

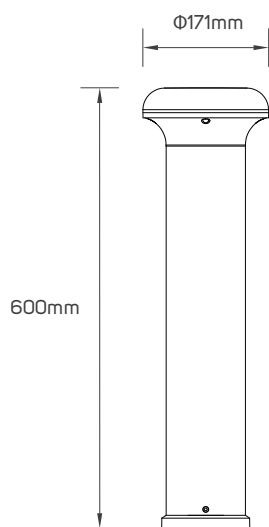


LI521326

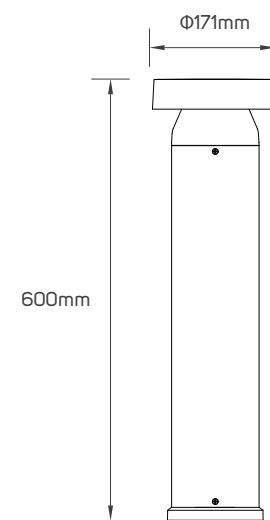


LI521327

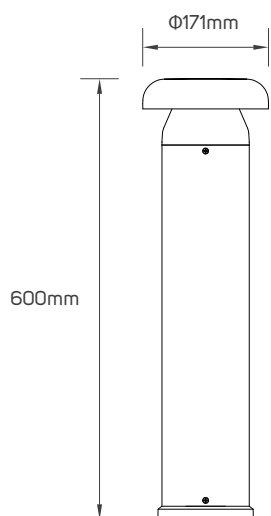

LI521328

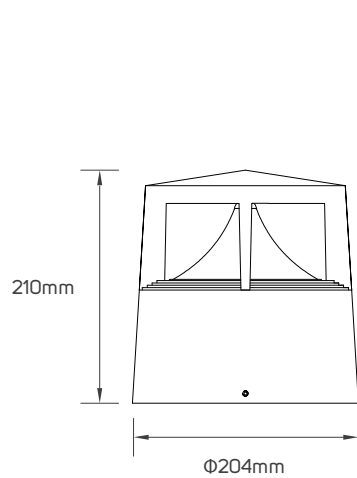

LI521329

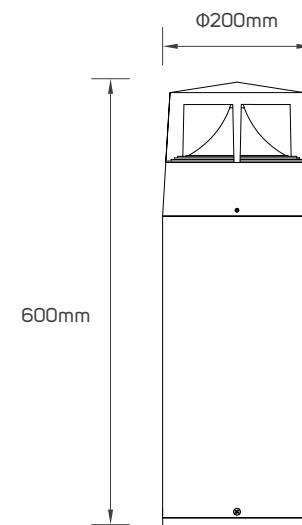

LI521330



**LED
BOLLARD LUMINAIRE
SERIES**

**BEYOND LIGHT..
TO THE LAST DETAILS!**

