



Make your boundaries **Stand Out**

# LED WALL LUMINAIRE

## PRODUCT INFORMATION

- Surface mounted, exterior- rated and compact sized architectural LED edge lighting luminaire that is designed for façade and outdoor decorative lighting applications.
- Ideal for edges lighting on windows and doors inner frames, building façades, landmarks and monuments.
- ILLUS LED WALL Luminaire gives the customer the flexibility to choose between 10 models based on their specific need with lumen package from 205 lm to 486 lm.

## BENEFITS

- Unique optical distribution to highlight the inner frames or outer edges of windows, balconies or doors.
- Compact size.
- Light weight.

## FEATURES

- High CRI>80.
- Efficacy up to 69 lm/w.
- Long life span 50,000 hrs.
- Operating voltage 220 – 240 V.
- Non – dimmable.

## AREAS OF APPLICATION



Industrial



Garden



Commercial

## TECHNICAL OPERATING & ELECTRICAL DATA


Input Voltage & Frequency	AC220-240V, 50/60Hz
Rated CRI	80
Color Temperature	3000K
Life Span	50,000hrs
Ingress Protection Rating	IP54
Dimming	Non-Dimmable

## SPECIFICATIONS


Code No.	Model No.	Power	Body Color	Frame Color	Body Material
611320	ILS7WLWW01	7	Shinny Black	Shinny Black	Aluminum
611321	ILS7WLWW02	7	Shinny Black	Shinny Black	Aluminum
611322	ILS7WLWW03	7	Shinny Black	Shinny Black	Aluminum
611323	ILS10WLWW04	10	Shinny Black	Shinny Black	Aluminum
611324	ILS10WLWW05	10	White	Shinny Black	Aluminum
611325	ILS10WLWW06	10	Shinny Black	Shinny Black	Aluminum
611326	ILS10WLWW07	10	White	Shinny Black	Aluminum

## DIMENSIONS


Code No.	Model No.	Width	Length	Height
611320	ILS7WLWW01	148	148	35
611321	ILS7WLWW02	148	148	35
611322	ILS7WLWW03	90	198	35
611323	ILS10WLWW04	150	150	50
611324	ILS10WLWW05	150	150	50
611325	ILS10WLWW06	150	150	50
611326	ILS10WLWW07	150	150	50




611325, 611326




611323, 611324



611320

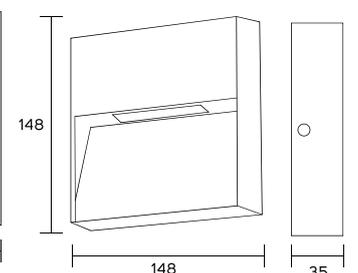

611321

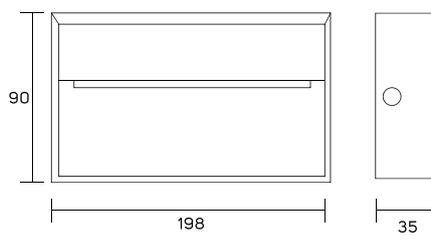

611322



## LED WALL LUMINAIRE



BEYOND LIGHT..  
TO THE LAST DETAILS!