

Make your boundaries stand out

LED WALL-MOUNTED LUMINAIRE SERIES

PRODUCT INFORMATION

- Surface mounted, exterior-rated and compact sized architectural LED edge lighting luminaire that is designed for façade and outdoor decorative lighting applications.
- Ideal for edges lighting on windows and doors inner frames, building façades, landmarks and monuments.
- ILLUS LED WALL MOUNTED Luminaire gives the customer the flexibility to choose between 10 models based on their specific need with lumen package from 53lm to 1020lm.

BENEFITS

- Unique optical distribution to highlight the inner frame or outer edges of windows, balconies or doors.
- Compact size.
- Light weight.
- Equipped with surge protective function.

FEATURES

- High CRI>80.
- Efficacy up to 105lm/w.
- Long lifespan 30,000H
- Operating voltage AC100–240V.
- Non-Dimmable.
- Good Impact Rating.



**BEYOND LIGHT..
TO THE LAST DETAILS!**

AREAS OF APPLICATION



Commercial



Shopping Center



Educational center



Garden

TECHNICAL OPERATING & ELECTRICAL DATA

| | |
|---------------------------|---------------------|
| Input Voltage & Frequency | AC100-240V, 50/60Hz |
| Rated CRI | 80 |
| Color Temperature | 3000K |
| Body Material | Aluminum+Glass |
| IEC Classification | Class I |
| Ambient Temperature | -20°C~45°C |
| Dimming | Non-Dimmable |
| Lifespan | 30000H |
| Switching Cycle | 100000x on/off |
| Warranty Period | 36 Months |


SPECIFICATIONS

| Code No. | Model No. | Body Color | Power | Lumen | Efficacy | Beam Angle | IK Rating | IP Rating | Surge Protection |
|----------|---------------|------------|-------|--------|-----------|------------|-----------|-----------|------------------|
| 521211 | ILS6.5WLWW01 | Dark Grey | 6.5W | 300lm | 50lm/W | 80°*70° | IK06 | IP54 | 4.5kV |
| 521218 | ILS6WLWW23 | Matt Black | 6W | 300lm | 50lm/W | 7°*7° | IK06 | IP54 | 2kV |
| 521219 | ILS6.5WLWW10 | Matt Black | 6.5W | 161lm | 26.83lm/W | 7°*79° | IK06 | IP54 | 2kV |
| 521224 | ILS3.5WLWW01 | Dark Grey | 3.5W | 99lm | 33lm/W | 70°*80° | IK06 | IP54 | 4.5kV |
| 521225 | ILS9WLWW05 | Dark Grey | 9W | 435lm | 54.38lm/W | 80° | IK08 | IP54 | 2kV |
| 521226 | ILS12.5WLWW01 | Dark Grey | 12.5W | 900lm | 75lm/W | 86°*86° | IK08 | IP54 | 2kV |
| 521255 | ILS6.5WLWW03 | Matt white | 6.5W | 300lm | 50lm/W | 90°*97° | IK06 | IP54 | 4.5kV |
| 521241 | ILS6.5WLWW02 | Black | 6.5W | 300lm | 50lm/W | 90°*97° | IK06 | IP54 | 4.5kV |
| 521267 | ILS12.5WLWW02 | Black | 12.5W | 500lm | 41.67lm/W | 95°*65° | IK06 | IP65 | 2kV |
| 521269 | ILS10.5WLWW01 | Black | 10.5W | 1020lm | 102lm/W | 30°*30° | IK06 | IP65 | 2kV |


illus

illumination


DIMENSIONS

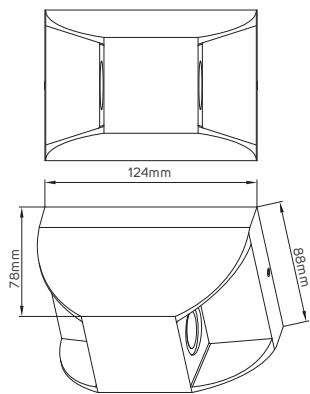


521211

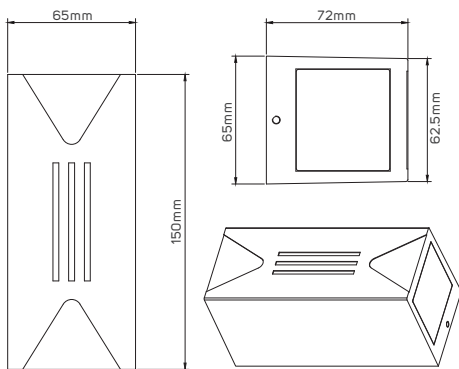


521218, 521219

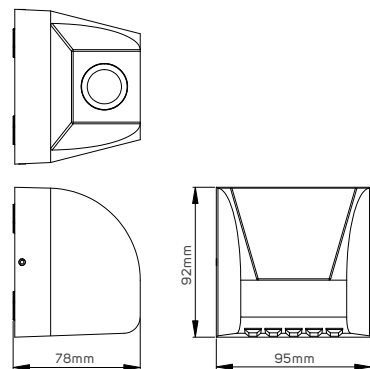


521224

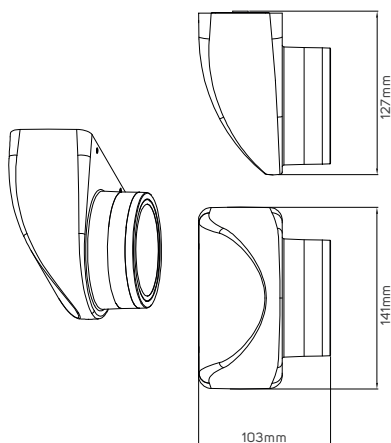


521225

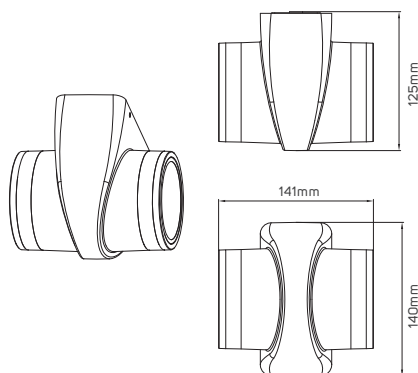


521226

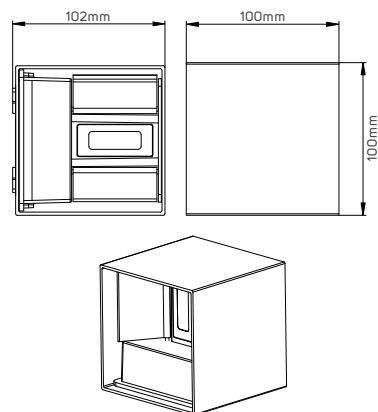

521255, 521241

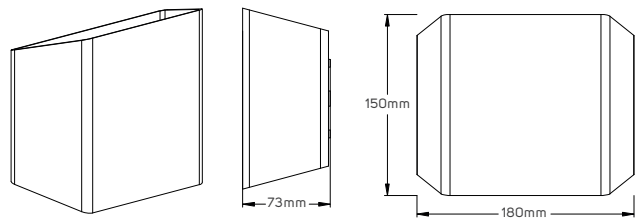

521267

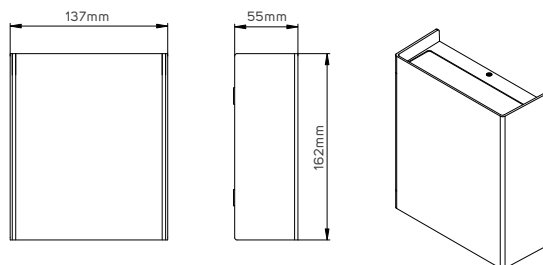

521269

APPLICATION PICTURE



This image is for display purpose only, the image may differ from the actual product, as the product is subject to modification provided without prior notice.

LED WALL-MOUNTED LUMINAIRE SERIES

**BEYOND LIGHT..
TO THE LAST DETAILS!**



Carrer de la Vall de la Ballestera, 64, 46015 València, Valencia, España, Tel: +34619824456

www.illusillumination.com

illus illumination reserve the right to make dimensional, design and technical alternations without prior notice. illus illumination endeavor to ensure that any advice, recommendation or information it provides in product literature is accurate and correct. However due to the fact that illus do not have direct control on where and how the products are installed, illus illumination cannot accept any liability either direct or indirect arising from the use of illus products whether or not in accordance with any advice, specification, recommendation or information provided by illus illumination or its distributors.

08122021M1