



Make your boundaries **Stand Out**

LED SURFACE-MOUNTED LUMINAIRE WALL

PRODUCT INFORMATION

- Surface mounted, exterior-rated and compact sized architectural LED edge lighting luminaire that is designed for façade and outdoor decorative lighting applications.
- Ideal for edges lighting on windows and doors inner frames, building façades, landmarks and monuments.
- ILLUS LED SURFACE MOUNTED Luminaire (WALL) gives the customer the flexibility to choose between 7 models based on their specific need with lumen package from 272lm to 913lm.

BENEFITS

- Unique optical distribution to highlight the inner frame or outer edges of windows, balconies or doors.
- Compact size.
- Light weight.
- Equipped with surge protective function.

FEATURES

- High CRI>80.
- Operating voltage AC220-240V.
- Non-Dimmable.
- Good Impact Rating.

AREAS OF APPLICATION



Industrial



Garden



Commercial



Educational Center


TECHNICAL OPERATING & ELECTRICAL DATA

Input Voltage & Frequency	AC220-240V, 50/60Hz
Rated CRI	80
Color Temperature	3000K
Body Color	Dark Grey
Material	Aluminum
Dimming	Non-Dimmable
IEC Classification	Class I
IK Rating	IK10
Lifespan	30000H
Switching Cycle	15000x on/off
Warranty Period	36 Months


SPECIFICATIONS

Code No.	Model No.	Power	Lumen	Efficacy	Beam Angle	IP Rating	TA	Surge Protection
541115	ILS4.5WLWW02	4.5W	874lm	194.22lm/W	117°	IP65	117°	2kV
541133	ILS3.5SMOWLF01	3.5W	54lm	15.43lm/W	202°	IP65	202°	0.5kV
541134	ILS07SMOWLF01	6W	272lm	45.33lm/W	60°	IP65	60°	0.5kV
541151	ILS13SMOWLF01	13W	913lm	70.23lm/W	342°	IP65	342°	2kV
541152	ILS13SMOWLF02	13.5W	913lm	67.63lm/W	342°	IP44	342°	2kV
541155	ILS13SMOWLF03	13W	753lm	57.93lm/W	157°	IP65	157°	2kV
541156	ILS13SMOWLF04	13.5W	753lm	55.78lm/W	157°	IP44	157°	2kV


DIMENSIONS

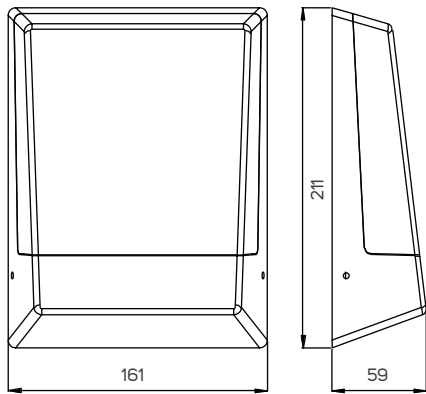


541115

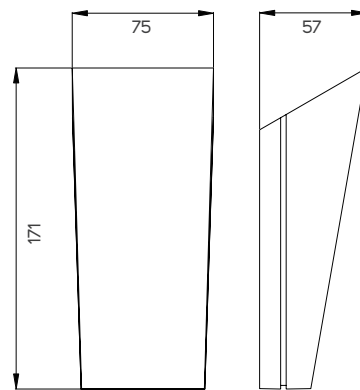


541133

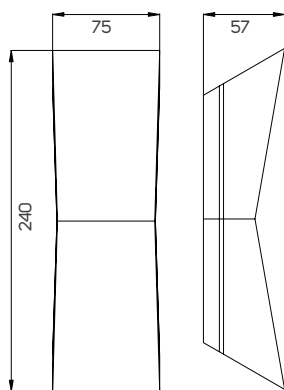

541134

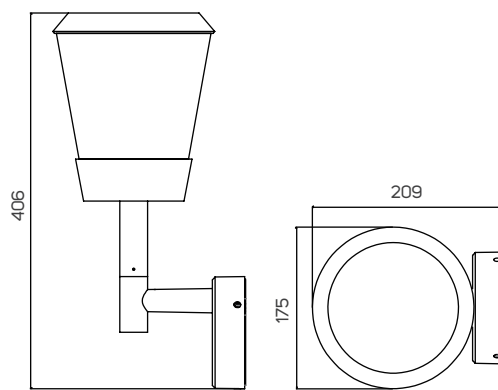

541151, 541152

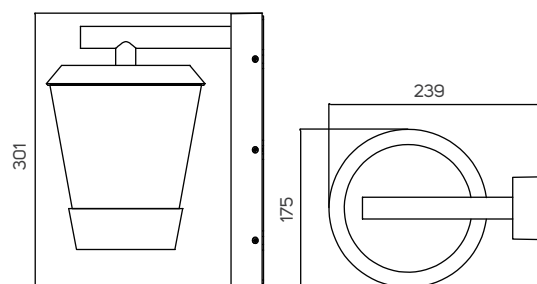

541155, 541156



**LED
SURFACE-MOUNTED
LUMINAIRE**
WALL

**BEYOND LIGHT..
TO THE LAST DETAILS!**

