



Full range recessed up-light to make your space distinctive

LED INGROUND LUMINAIRE SERIES

PRODUCT INFORMATION

- Provide a completed range of up-lights of wattage, color temperature.
- Make your space distinctive with more safety and convenience as well.
- ILLUS LED INGROUND Luminaire gives the customer the flexibility to choose between 3 models based on their specific need with lumen package from 28lm to 100lm.

BENEFITS

- Easy to opt.
- Quick installation.
- Robust design for severe conditions.
- Equipped with surge protective function.

FEATURES

- High CRI>80.
- Long lifespan 30,000H.
- Operating voltage AC100–240V.
- Non-Dimmable.
- Good Impact Rating.



BEYOND LIGHT..
TO THE LAST DETAILS!

AREAS OF APPLICATION



Commercial



Shopping Center



Educational center



Garden


TECHNICAL OPERATING & ELECTRICAL DATA

| | |
|---------------------------|---------------------|
| Input Voltage & Frequency | AC100-240V, 50/60Hz |
| Rated Power | 1.6W |
| Rated CRI | 80 |
| Dimming | Non-Dimmable |
| IEC Classification | Class II |
| Ambient Temperature | -30°C~45°C |
| IK Rating | IK10 |
| Body Color | Black |
| Body Material | Aluminum+Glass |
| Lifespan | 30000H |
| Switching Cycle | 100000x on/off |
| Warranty Period | 36 Months |

SPECIFICATIONS

| Code No. | Model No. | Lumen | CCT | Beam Angle | IP Rating |
|----------|----------------|-------|-------|------------|-----------|
| 521304 | ILS1.5RMOIGL07 | 75lm | 3000K | 32°±5° | IP67 |
| 521129 | ILS1.5RMOIGL06 | 28lm | Blue | 32°±5° | IP67 |
| 521125 | ILS1.5RMOIGL02 | 100lm | 6500K | 32°±5° | IP67 |

DIMENSIONS

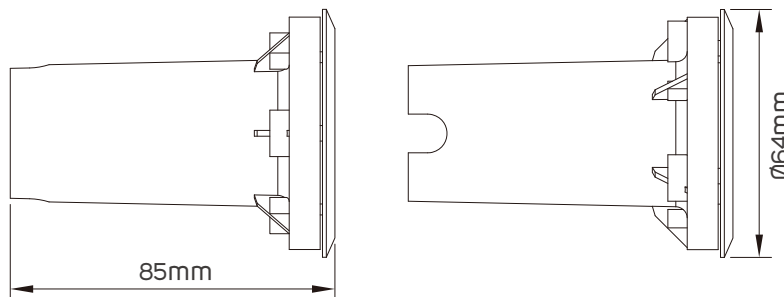

521304, 521129, 521125 Cutting size (Ø61)

APPLICATION PICTURE



This image is for display purpose only, the image may differ from the actual product, as the product is subject to modification provided without prior notice.

LED INGROUND LUMINAIRE SERIES

BEYOND LIGHT..
TO THE LAST DETAILS!

