

Make your boundaries Stand Out

LED SURFACE-MOUNTED LUMINAIRE WALL

PRODUCT INFORMATION

- Surface mounted, exterior- rated and compact sized architectural LED edge lighting luminaire that is designed for façade and outdoor decorative lighting applications.
- Ideal for edges lighting on windows and doors inner frames, building façades, landmarks and monuments.
- ILLUS LED SURFACE MOUNTED Luminaire (WALL) gives the customer the flexibility to choose between 10 models based on their specific need.

BENEFITS

- Unique optical distribution to highlight the inner frame or outer edges of windows, balconies or doors.
- Compact size.
- Light weight.

FEATURES

- High CRI>80.
- Operating voltage AC220-240V.
- Non dimmable.



AREAS OF APPLICATION







Industrial

Garden

I TECHNICAL OPERATING & ELECTRICAL DATA


Input Voltage & Frequency	AC220-240V, 50/60Hz		
Rated CRI	80		
Color Temperature	3000K		
Life Span	30000hrs		
Ingress Protection Rating	IP65		
Dimming	Non-Dimmable		
IEC Classification	Class I		
Switching Cycle	15000X,on/off		


SPECIFICATIONS


Code No.	Model No.	Power	Body Color	Body Material	Lumen	Efficacy
541102	ILS13WLWW02	13	Dark Gray	Aluminum	755ml	58.08lm/W
541103	ILS13WLWW03	13	Dark Gray	Aluminum	490ml	37.69lm/W
541104	ILS7WLWW04	7	Dark Gray	Aluminum	235ml	33.57ml/W
541105	ILS13WLWW04	13	Dark Gray	Aluminum	362ml	27.85ml/W
541106	ILS7WLWW05	7	Dark Gray	Aluminum	370ml	52.86ml/W
541107	ILS13WLWW05	13	Dark Gray	Aluminum	698ml	53.69ml/W
541108	ILS11WLWW01	11	Dark Gray	Aluminum	387ml	35.18ml/W
541109	ILS7WLWW06	7	Dark Gray	Aluminum	179ml	25.57ml/W
541110	ILS13WLWW06	13	Dark Gray	Aluminum	609ml	46.85ml/W
541111	ILS7WLWW07	7	Dark Gray	Aluminum	169ml	24.14ml/W





DIMENSIONS















<u>©</u> <u>©</u> <u>®</u> 58










APPLICATION IMAGE

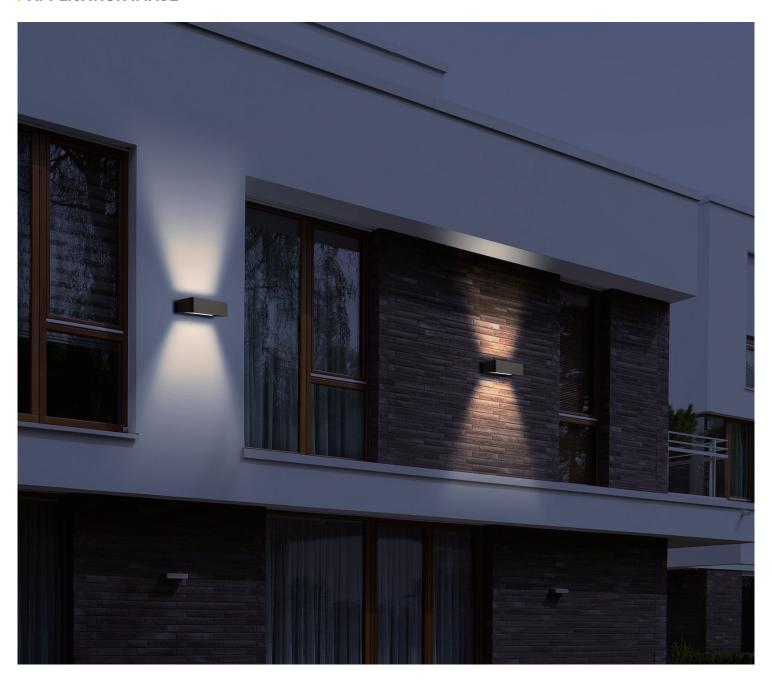

LED SURFACE-MOUNTED LUMINAIRE WALL



BEYOND LIGHT..
TO THE LAST DETAILS!